

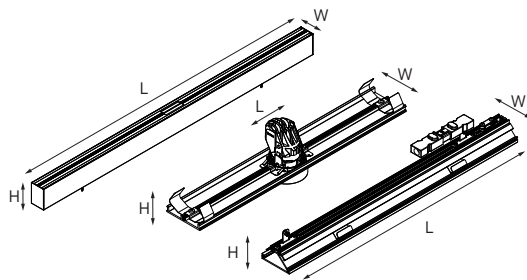
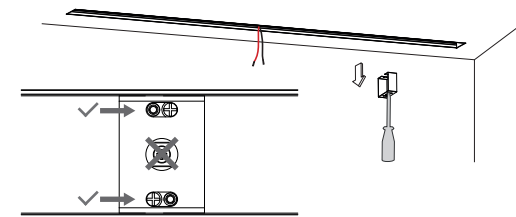


technics

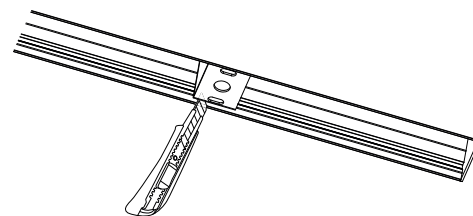

Name	Reference	drive current	drive voltage	wattage	LxWxH
Cana 40 main profile gear excl.	KR75540x				Lx54x80
Module 40 single	KR93400(5)x-xxxx-xx	700mA		2W	48x48x55
Module 40 twin	KR93450(5)x-xxxx-xx	700mA		4W	103x48x55
Module 40 double	KR93475x-xxxx-xx	700mA		4W	95x48x55
Holon 40 dir. single	KR93430x-xxxx-xx	700mA		8.4W	48x145x100
ligna 40	KR934900-xxxx		24V	12/m	Lx48x26

1 installation



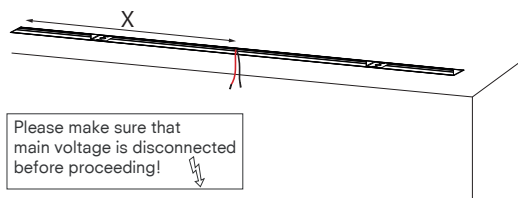


2 installation

To install the plasterkit, see installation manual KR8050002138. supply power at the correct position, see orderform!

before removing the brackets, make sure there is no plaster residue left between the bracket and the plasterkit profile, use stanley knife to remove the residue if necessary. Do not damage the paint in the process!

Unscrew the sheet metal brackets. Keep the M4 screws for fixing the main profile to the plasterkit. Do not unscrew the middle screw!

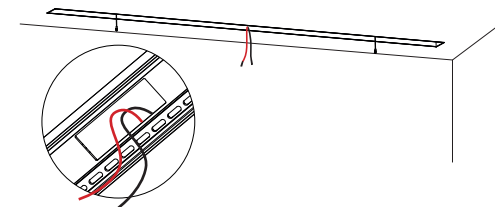
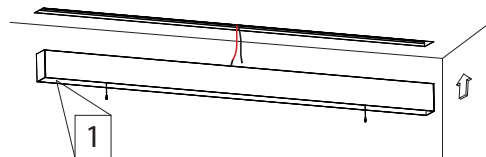



3 installation

Install the correct gear with strain relief on the hollow ceiling

place the main profile inside the plasterkit
check orderform for orientation. Nr.1 indicates left side on orderform

make sure the cable goes through the square opening inside the main profile before proceeding

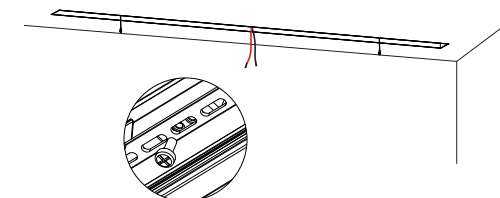

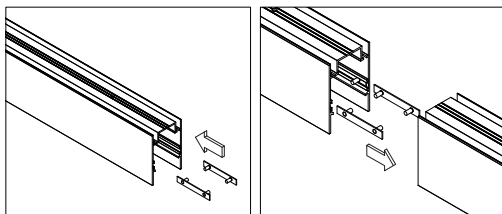


4 installation

In case of several pieces, connect the main profiles with the connection bracket. Slide the little brackets into the profile

Fix the profiles with the long bracket and the nuts.

use M4 screws which were removed from the plasterkit to fixate the main profile inside the plasterkit

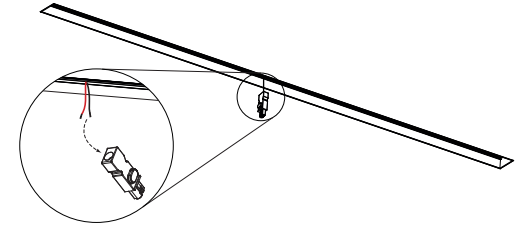

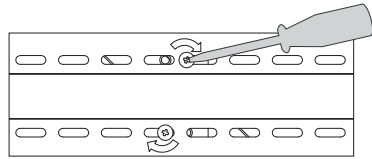


5 installation

always use two screws on both sides!

arrange the modules on a flat, clean table before installing. Modules are labeled 1 2, 3 4, 5 6...7 8. Nr. 1 inside profile indicates where to start

install the female connector separately from the male!
1: + 2: -

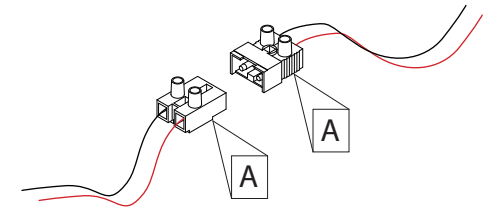

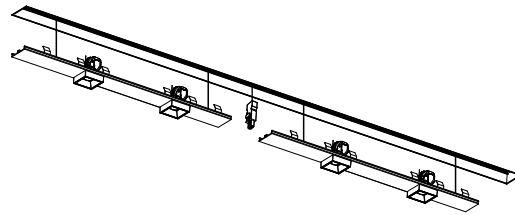


6 installation

suspend all the covers with modules (!) underneath the main profile, but do not install them yet.

use safety cables for suspending

cross connect the modules with each other. Each set of connectors has a matching letter (A-A, B-B, etc.)

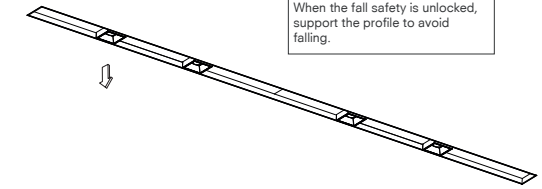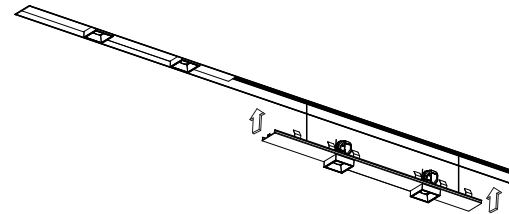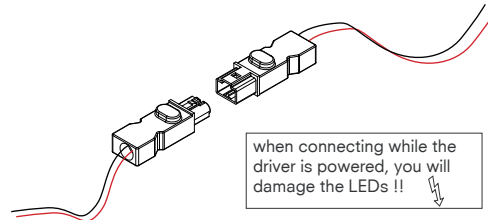


7 installation

when all the modules are connected, connect the modules to the driver with the provided connector

install the modules inside the main profile one at a time

you can remove the covers by gently pulling the module down

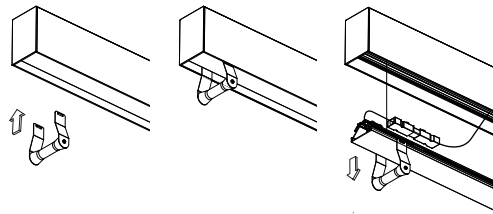

8 installation

you can remove the ligma by using the removal tool