


technics	In case of precast concrete panels, gear inclusive.	In case of finished concrete ceiling, gear exclusive.	Name	Reference	Lamp type	∅ A	B	C	D	∅ E	
			Concrete plasterkit aplis 80	KR737702	QR-CBC51 LED dir (Kr93773x) LED dir (Kr93793x) Fixed, WW (Kr93703x, Kr93733x) Audio Diapason 40/80/120 base ATO 80 single and double	152	320	320	200	170	250
			Concrete plasterkit aplis 165	KR737712	QT12-ax QR-LP111/LED-LP111 HIT-TC HIR-CE111 QT12-ax WW HIT-TC WW LED wallwasher LED	287	300	300	200	287	287
			QR-LP111/LED-LP111	287	300	300	230	287			
			HIT-TC	287	300	300	230	287			
			HIR-CE111	287	300	300	230	287			
			QT12-ax WW	287	300	300	175	287			
			HIT-TC WW	287	300	300	205	287			
			LED wallwasher	287	300	300	200	287			
			LED	287	300	300	200	287			
			Concrete plasterkit aplis 40	KR737602	LED dir, fixed, WW	110	110	110	80	110	

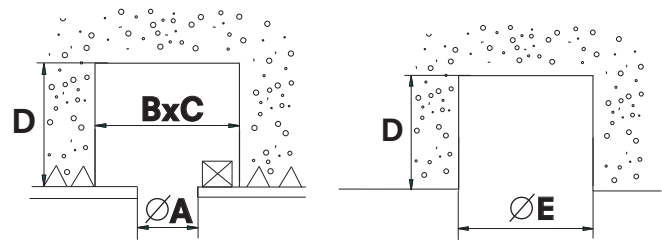

** Mind that the driver dimensions WxH cannot exceed 67x29,5mm!
the length of the driver determines D as it has to be pushed perpendicular through the plasterkit.
Depth = length of the driver + 30mm

1 cut out	2 dimensions
	<p>Aplis 80</p>
	<p>Aplis 165</p>
	<p>Aplis 40</p>

3 installation		
<p>Put the plasterkit through the hole.</p>	<p>Fix the plasterkit with screws.</p>	<p>Fill around perimeter of plasterkit using suitable filler and plaster to hide screws and plasterkit.</p>

4 installation	
<p>Minimum filler distance, spread out until zero.</p>	<p>For installing aplis 80 and 165, see the corresponding installation manual.</p>