



kreon

technics





in case of installation with plasterkit



Name	Reference	plasterkit: L x W x D
Down-in-line 76 single LED (8,4W)	kr918293	86 x 86 x 140
Down-in-line 76 double LED (2x8,4W)	kr928293	163 x 86 x 140
Down-in-line 76 single LED (8,4W)	kr918093	86 x 86 x 140
Down-in-line 76 double LED (2x8,4W)	kr928093	163 x 86 x 140

1 plasterkit

Please make sure that main voltage is disconnected before proceeding! ⚡

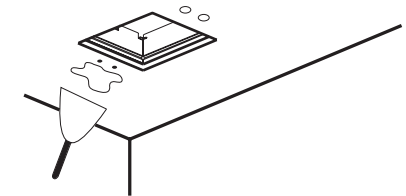



plasterkit

adjust brackets to correct ceiling thickness and fold strips

install plasterkit on the ceiling and fix it with plasterboard screws

plaster ceiling to hide screws and plaster kit


in case of installation with BA13






Name	Reference	Ø x D
Down-in-line 76 single LED (7,2W)	kr918293	180 x 140
Down-in-line 76 double LED (2x7,2W)	kr928293	300 x 175
Down-in-line 76 single LED (8,4W)	kr918093	180 x 140
Down-in-line 76 double LED (2x8,4W)	kr928093	300 x 175

T= plasterboard thickness=12,5-13mm

2 plasterkit BA13



3 marks for screwing

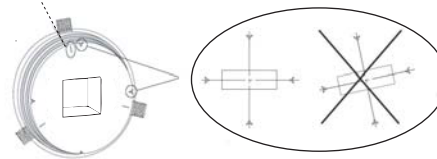


plasterkit BA13

adjust V-marks for the alignment


install plasterkit on the ceiling and fix it with screws

plaster ceiling to hide screws



connect the small connector included with the LED
IMPORTANT:
 - check polarity: red = +, black = -
 - the connector only fits in one direction: don't force it otherwise!!


3 connection

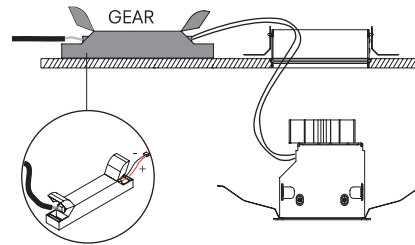

install correct gear with strain relief on hollow ceiling


Name	Reference	Gear
Down-in-line 76 single LED	kr918293	Led Driver 20V/350mA
Down-in-line 76 single LED	kr918093	Led Driver 12V/700mA

WARNING
 the led will be destroyed if not connected correctly!
 respect polarity!!



connect the small connector included with the LED
IMPORTANT:
 check polarity: red = +, black = -



4 installation

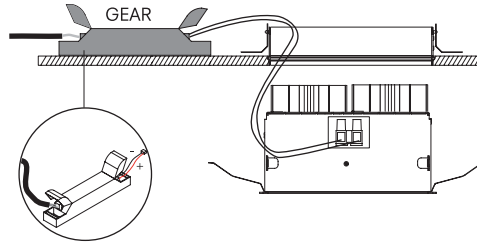


install correct gear with strain relief on hollow ceiling

Name	Reference	Gear
Down-in-line 76 double LED	kr928293	Led Driver 40V/350mA
Down-in-line 76 double LED	kr928093	Led Driver 24V/700mA


WARNING
 the led will be destroyed if not connected correctly!
 respect polarity!!



fold the springs inward and insert the appliance



CLICK!



5 louvre



6 louvre

kreon nv

Industrieweg Noord 1152
 3660 Oplabbek
 Belgium

Tel + 32 89 81 97 80
 Fax + 32 89 81 97 90

www.kreon.com
 mailbox@kreon.be

Rev. date: 12/11/2012
 KR81782031705