















technics	Mini Side / Mini Side LED / Mini Side LED outdoor		Name	Reference	L x W x D (*) with installation box
<b>1 cut out concrete wall</b>		 <p>mini side LED outdoor = only floorwasher!</p>	Mini Side	kr99265x / kr97265x	420 x 135 x 75
			Mini Side LED	kr99285x /kr97285x	420 x 135 x 75
			Mini Side LED outdoor	kr97205x	420 x 135 x 75
			<div style="border: 1px solid black; padding: 5px;">                     Please make sure that mains voltage is disconnected before proceeding! ⚡                      (*) installation box required!                 </div>		
<b>2 installation concretebox</b>	 <p>fold the installation box</p>	 <p>place the installation box in the cut-out</p>	 <p>mount plaster kit on concrete box</p>	 <p>install with upright border to the front</p>	 <p>plaster and paint the wall</p>
				Name	Reference
Mini Side	kr99265x / kr97265x			215 x 70 x 80	
<b>3 cut out plasterboard wall</b>		 <p>plaster and paint the wall</p>	Name	Reference	L x W x D with plasterkit
			Mini Side	kr99265x / kr97265x	390 x 120 x 75
			Mini Side LED	kr99285x /kr97285x	390 x 120 x 75
Mini Side LED outdoor	kr97205x	390 x 120 x 75			
<b>4 cut out + installation brick wall</b>					



connect appliance to correct voltage



- Mini side LED outdoor wiring instructions  
connect brown wire of driver to V+ of supply voltage, connect blue wire of driver to V- of supply voltage using the attached IP67 connector. Pay attention to polarity!




If present, strip the outer jacket over the appropriate length. Push the wire into the IP67 connector exactly half way. Push down the button. Visually check the termination

Name	Reference	Voltage
Mini Side	kr99265x / kr97265x	12V /230V
Mini Side LED	kr99285x / kr97285x	700mA/230V
Mini Side LED outdoor	kr97205x	230V

- Mini side LED (gear exclusive) wiring instructions


Mini side LED (gear exclusive)

Mini side LED (gear inclusive)

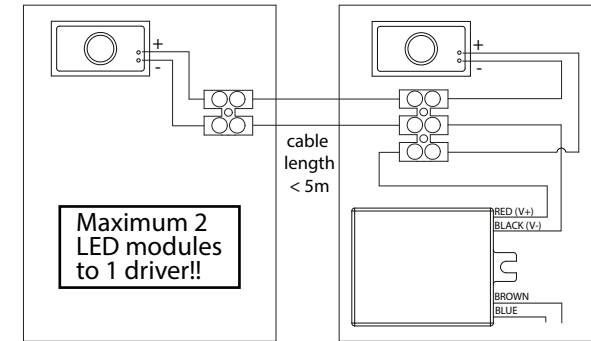


Connect the mini side LED (gear exclusive) to the mini side LED (gear inclusive) following the above scheme. Pay attention to polarity!

## 5 connection




fold the springs inward




insert the appliance


## 6 installation



insert bracket from the inside. slide the bracket to the wall and fix with the screw.




insert the glass and lampholder bracket into slit



insert the reflector, underside first. use plastic gloves

CLICK!



different reflectors are possible. to remove the reflector use a screwdriver



## picture

kreon nv

Industrieweg Noord 1152  
3660 Oplabbek  
Belgium

Tel + 32 89 81 97 80  
Fax + 32 89 81 97 90

www.kreon.com  
mailbox@kreon.be

revision date 17-03-2017  
KR8020501166

Sheet 2/2