


# kreon

## technics

Nuit

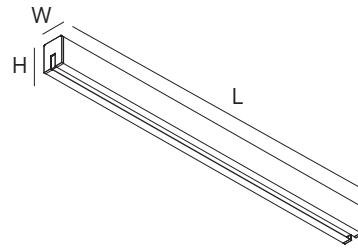

## Name

Nuit standard 1x5 DALI  
 Nuit standard 1x10 DALI  
 Nuit standard 1x5 1-10V  
 Nuit standard 1x10 1-10V  
 Nuit standard 1x5 ON/OFF - PHASE  
 Nuit standard 1x10 ON/OFF - PHASE  
 Nuit standard 1x5 GEAR EXCL.

## Reference

KR953x1x  
 KR953x2x  
 KR953x3x  
 KR953x5x  
 KR953x6x  
 KR953x7x  
 KR95350x

## L x W x H

750x 42.5x 60  
 750x 42.5x 60  
 750x 42.5x 60  
 750x 42.5x 60  
 750x 42.5x 60  
 750x 42.5x 60  
 300x 42.5x 60

Please make sure that mains voltage is disconnected before installing!

## 1 dimensions

## Name

Nuit LED module  
 Nuit LED module

## Driver

inclusive  
 exclusive




## input Voltage

230Vac  
 13.8Vdc

## LED Wattage

6.9W per 5 LED's  
 6.9W

## 2 specifications

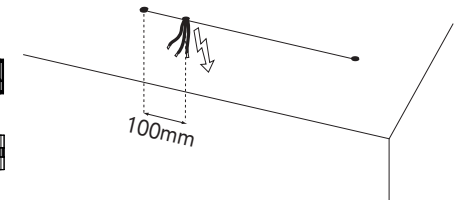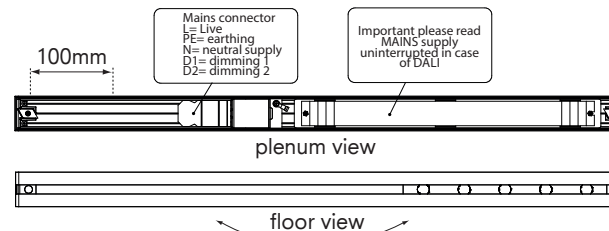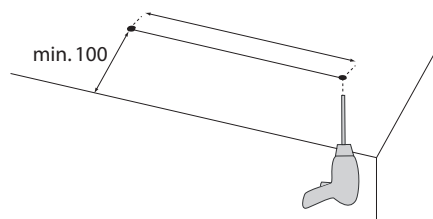


## 3 installation in case of surface mounting


Drill 2 holes (Ø5) at the right distance.

Apply correct wiring at 100mm from one of the holes  
 Mind the orientation of the fitting while positioning the wiring!!


## 4 installation in case of surface mounting

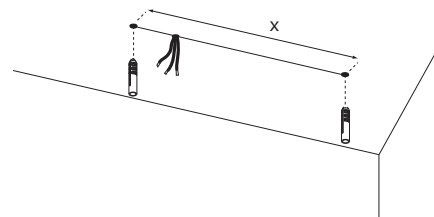

insert plugs

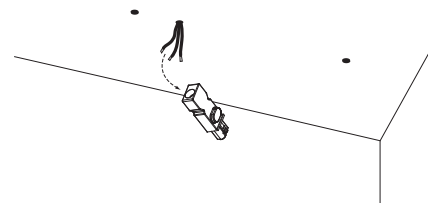


connect female connector with strain relief to power supply (driver incl.) or driver (driver excl.)

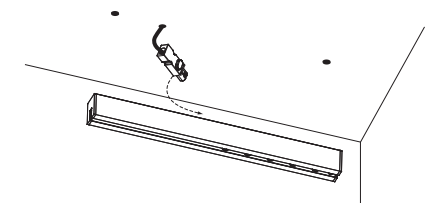


make correct connection with male connector in luminaire

**technics**


**4 installation in case of surface mounting**

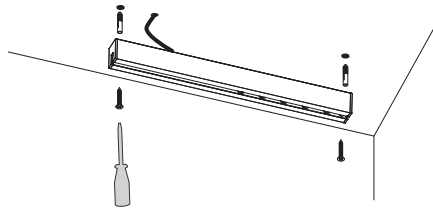


insert plugs and fix luminaire to ceiling

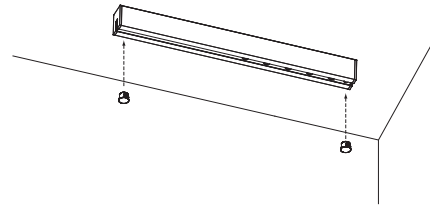


cover screw holes with supplied tube plugs

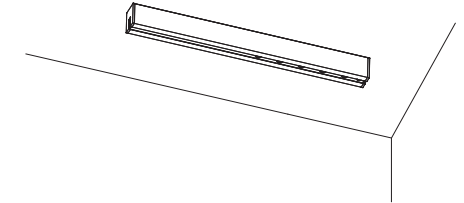



**5 installation in case of recessed mounting**

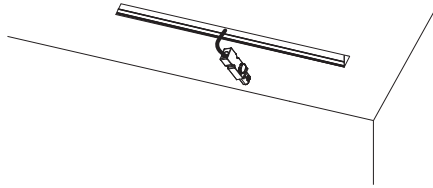

after installation of the plasterkit or recessed profile, follow the next steps




use the supplied parallelogram shaped nuts and screws with countersunk heads




set the nut on top of the screw


**6 installation in case of recessed mounting**

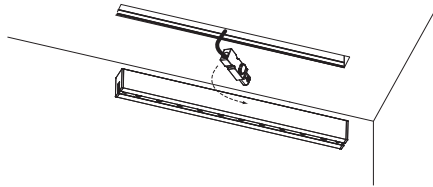

make correct connection with male connector in luminaire

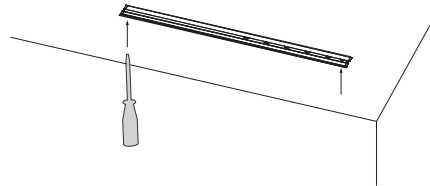

fix the luminaire in the installed recessed profile

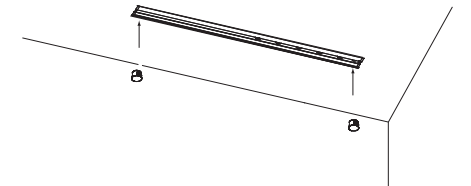

cover screw holes with supplied tube plugs

**8 pictures**