

kreon

| | | | | | |
|----------|--|---|----------------------|--|-----------------|
| technics | Side IL, Square Side IL, Small Side IL, Small Square Side IL | <p>>1m 60 <1m 20</p> <p>recommended orientation</p> | Name | Reference | L x W x D (**) |
| | | | Side IL | kr995413, kr995423, kr975423*, kr975433*, kr975453*, kr975443*, kr995463 | 455 x 270 x 110 |
| 1 | cut out concrete wall | | Side IL LED | kr995703, kr995723, kr975733*, kr975753* kr995763 | 455 x 350 x 110 |
| | | | Square Side IL | kr995613, kr975623* | 335 x 195 x 85 |
| | | | Square Side IL LED | kr995603 | |
| | | | Small Side IL | kr995813, kr975823* | 335 x 245 x 85 |
| | | | Small Side IL LED | kr995803 | |
| | | | Small Square Side IL | | |
| | | | Small Square SIL LED | | |

* Not to be used in inflammable materials! ** Installation box required!


| | | | | | | |
|---|----------------------------|----------------------------------|--|-------------------------|--|-----------------------------------|
| 2 | installation concrete wall | <p>fold the installation box</p> | <p>place the installation box in the cut out</p> | <p>mount plasterkit</p> | <p>adjust depth and fix thumb screws</p> | <p>plaster and paint the wall</p> |
| | | | | | | |

| | | | | | | | |
|---|--|--|----------------------|-----------------|------------------------|--|-----------------------------------|
| 3 | cut out + installation plasterboard wall | | Name | L x W x D | <p>fix with screws</p> | <p>adjust depth and fix thumb screws</p> | <p>plaster and paint the wall</p> |
| | | | Side IL | 320 x 260 x 120 | | | |
| | | | Side IL LED | | | | |
| | | | Square Side IL | 320 x 339 x 120 | | | |
| | | | Square Side IL LED | | | | |
| | | | Small Side IL | 220 x 186 x 100 | | | |
| | | | Small Side IL LED | | | | |
| | | | Small Square Side IL | 220 x 236 x 100 | | | |
| | | | Small Square SIL LED | | | | |

| | | | | | | | |
|---|-----------------------------------|--|----------------------|-----------------|--|--|-----------------------------------|
| 4 | cut out + installation brick wall | | Name | L x W x D | | <p>adjust depth and fix thumb screws</p> | <p>plaster and paint the wall</p> |
| | | | Side IL | 400 x 260 x 100 | | | |
| | | | Side IL LED | | | | |
| | | | Square Side IL | 400 x 340 x 100 | | | |
| | | | Square Side IL LED | | | | |
| | | | Small Side IL | 270 x 185 x 75 | | | |
| | | | Small Side IL LED | | | | |
| | | | Small Square Side IL | 270 x 235 x 75 | | | |
| | | | Small Square SIL LED | | | | |


technics

Side IL, Square Side IL, Small Side IL, Small Square Side IL




connect power supply

Please make sure that mains voltage is disconnected before proceeding!




slide fixture into installed plasterkit




fix base plate to housing with screw (2x)


5 connection



insert the reflector, underside first.
use plastic gloves

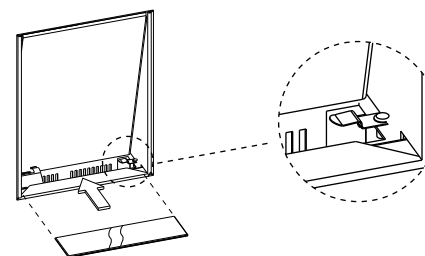


insert the glass in the springs

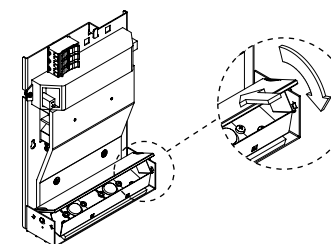

in case of LED, slide the glass between the springs and turn to the horizontal position

6 installation

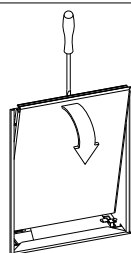

different reflectors are possible.
to remove the reflector use a screwdriver

7 accessories

| visible cut out in wall | L x W |
|-------------------------|-----------|
| Side IL | 308 x 228 |
| Side IL LED | |
| Square Side IL | 308 x 307 |
| Square Side IL LED | |
| Small Side IL | 205 x 156 |
| Small Side IL LED | |
| Small Square Side IL | 205 x 206 |
| Small Square SIL LED | |

8 picture



kreon nv

Industrieweg Noord 1152
3660 Opglabbeek
Belgium

Tel + 32 89 81 97 80
Fax + 32 89 81 97 90

www.kreon.com
mailbox@kreon.be

Rev. date: 20/06/2012
KR8750041405