




101903

# NANOSPOT MINI HP

Projector for outdoor installation on a façade/wall. Body in anodized aluminum with phospho-chromatised and polyester powder coating, bracket in stainless steel, tempered safety glass, moulded silicone gasket and stainless steel screws. Constant current max 700mA remote driver needed. With 1 x CREE XHP35 LED. IP66 rating.

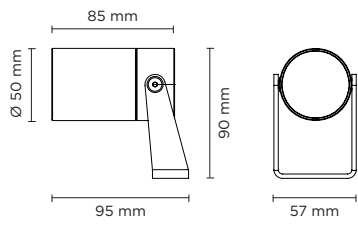

**350 mA - LED POWER 5W**

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
high-power led	4°	510	102.00
high-power led	10°	489	97.80
high-power led	28°	474	94.80
<b>4000°K neutral-white</b>			
high-power led	4°	520	104.00
high-power led	10°	499	99.80
high-power led	28°	484	96.80

**Finish color options:**

- Textured Grey RAL 9006
- Anthracite Grey RAL 7016
- Matt Black (on request)

**Technical features**

IP 66

IK 09

CE

5 YEARS

Full RGB

NEW

**Technical data**

Wattage	MAX 10 WATT
IP Rating	IP66
IK Rating	O9
Material	Hard anodized aluminum
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	1 x CREE XHP35 LED
Screws	Stainless steel
Remote driver	Constant current max 700mA
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. power cable included
Gross weight	0,60 Kg



### 500 mA - LED POWER 7W

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
high-power led	4°	690	98.57
high-power led	10°	662	94.57
high-power led	28°	642	91.71
<b>4000°K neutral-white</b>			
high-power led	4°	703	100.43
high-power led	10°	676	96.57
high-power led	28°	656	93.71

### 700 mA - LED POWER 10W

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
high-power led	4°	907	90.69
high-power led	10°	872	87.20
high-power led	28°	846	84.60
<b>4000°K neutral-white</b>			
high-power led	4°	930	93.00
high-power led	10°	890	89.00
high-power led	28°	863	86.30


## ACCESSORIES

## OPTIONAL

AC044  
SPIKE



AC095  
HONEYCOMB LOUVER



AC038  
TREE STRAP



AC098  
ANTI-GLARE SNOOT



AC100

PIPE L 300 mm

Extension pipe length 300 mm made in anodized aluminum with phospho-chromatised and polyester powder coating.

AC101


PIPE L 600 mm

Extension pipe length 600 mm made in anodized aluminum with phospho-chromatised and polyester powder coating.


AC102

PIPE L 900 mm


Extension pipe length 900 mm made in anodized aluminum with phospho-chromatised and polyester powder coating.



AC100

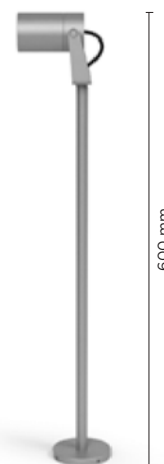

AC101

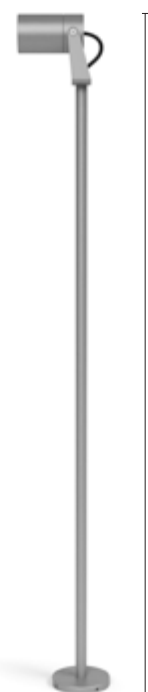

AC102

### remote driver selection

brand	manufacturer code	type	watt	IP rate	numbers of fixtures
ALVIT Italy	AL1435S-IP	Constant current 350mA	14W	IP67	min 1 - max 2
ALVIT Italy	AL1450S-IP	Constant current 500mA	14W	IP67	1
ALVIT Italy	AL1470S-IP	Constant current 700mA	14W	IP67	1
TCI Italy	152014/350	Constant current 350mA	17W	IP68	min 1 - max 3
TCI Italy	152014/500	Constant current 500mA	24W	IP68	min 1 - max 3
TCI Italy	152014/700	Constant current 700mA	30W	IP68	min 1 - max 3





