


PANZERI

Two

220-240V AC ON-OFF
L03819.000.0406

 mat brass

DIRECT
LIGHT


Data sheet

CODE	L03819.000.0406
SYSTEM POWER CONSUMPTION	10W
EFFICACY	59.5lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 50.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	850lm
LUMEN OUTPUT	595lm
EFFICIENCY	70%
WEIGHT	1,63 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	18,0 x 46,0 x 20,0 cm




Suspension lighting fixture for interiors, with direct light emission.
Extruded aluminium structure in white, black, bronze or mat brass polyacrylic paint, or with gold leaf coating.
Pickled sheet metal end cap in white, black, bronze, mat brass or gold polyacrylic paint.
Aluminium dissipation plate.
Flat frosted glass diffuser.
Pickled sheet metal frame in white, black, bronze or mat brass polyacrylic paint, or with gold leaf coating.
2m (78,7") long suspension and power cable in transparent PVC.
Power canopy with galvanized sheet metal ceiling bracket and pickled sheet metal covering in white, black, bronze or mat brass polyacrylic paint, or with gold leaf coating.

Technical drawing

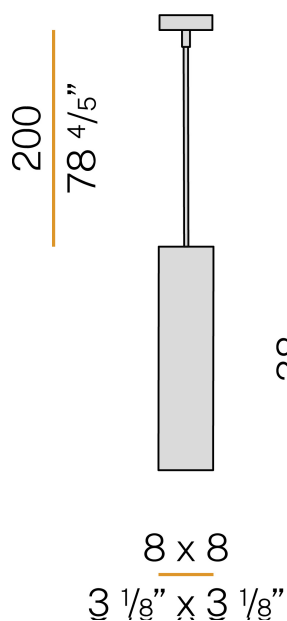

Polar diagram

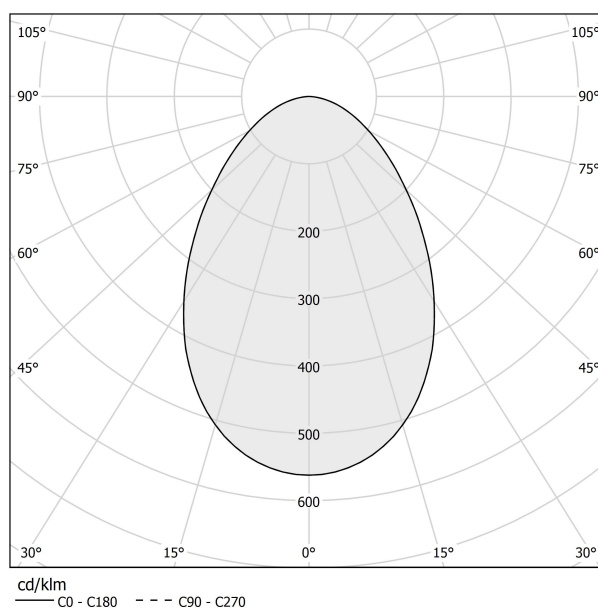

PANZERI

Two

Accessories / dimming

XM14/230

Dimmable device for 230V LED modules, 5=100W.

