To-be

24V DC

M02517.085.0510





Data sheet

CODE	M02517.085.0510
SYSTEM POWER CONSUMPTION	2,8W
EFFICACY	90.5lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	270lm
LUMEN OUTPUT	181lm
EFFICIENCY	67%
WEIGHT	0,64 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	5,0 x 105,0 x 10,0 cm







Multiple suspension lighting fixture for interiors, with direct light emission.

 ${\sf Extruded\ aluminium\ structure\ in\ white,\ mat\ black,\ bronze\ or\ mat\ brass\ polyacrylic\ paint}$ or with gold leaf coating.

Extruded aluminium heat sink.


Modelled polycarbonate diffuser with opaline finish.

Turned brass end cap in polyacrylic paint.


5m (196,9") long suspension and power cable in transparent PVC.

Provided without power canopy, complete with cable clamp on the cable's free extremity.

Technical drawing



Polar diagram



To-be

Accessories / power supply

XM100/24 DIM	LED driver, 100W 24V DC, DALI/Push DIM dimmable.	
		39 sm. 9 tr
XM150/24 DIM	LED driver, 150W 24V DC, DALI/Push DIM dimmable.	} ≥
CE FHI 🗵 🐽		er e
XM18/24 DIM	LED driver, 18W 24V DC, DALI/Push DIM dimmable.	902.2mm
XM35/24 DIM	LED driver, 35W 24V DC, DALI/Push DIM dimmable.	
C € EHI 🗵 🐽		
XM6-20 UNI	LED driver, 4÷20W 250÷700mA.	72 mm 76 **
CE EHI 🗵 🐵		20 118 mm 4 ² / ₅ *
XM60/24 DIM	LED driver, 60W 24V DC, DALI/Push DIM dimmable.	
C € [EHI] X (iii)		25 m 4 to
YDV.024.030.A01	LED driver, 30W 24V DC.	ĝis ĝis
CE FILL X (III)		
YDV.024.060.A01	LED driver, 60W 24V DC.	100 Total To
		\$\frac{1}{2} \rightarrow \frac{1}{2} \frac
YDV.024.120.A01	LED driver, 120W 24V DC.	
CE EHL X (m)		

To-be

Accessories / power supply

YDV.024.180.A01


LED driver, 180W 24V DC.





To-be

Accessories / power supply and fixing

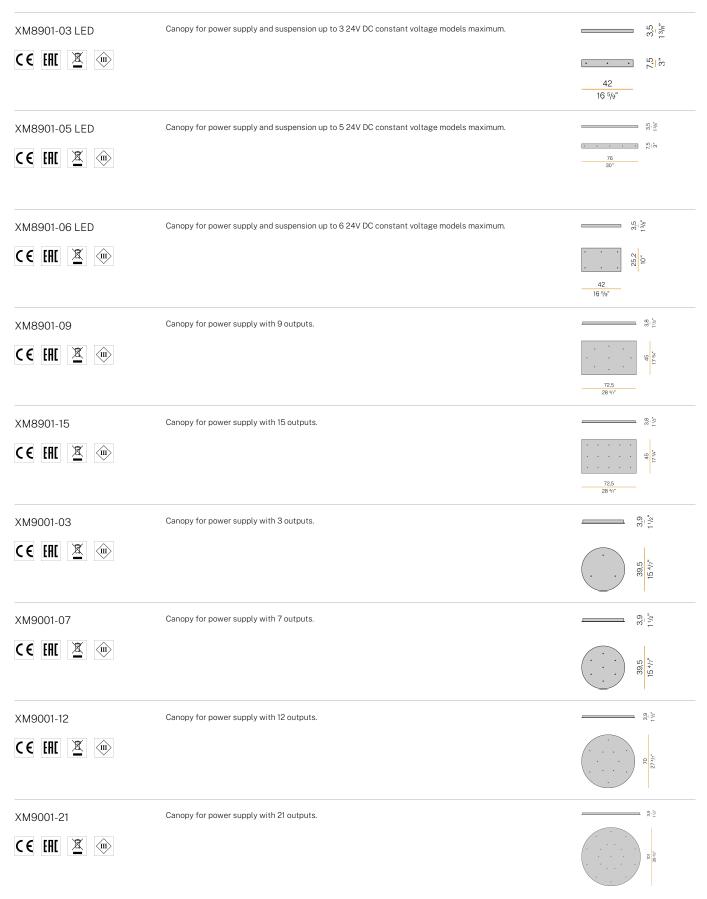

To-be

Accessories / power supply and fixing

XM9201-01

C € [HI 🗵 🐵

Recessed canopy for electric cable suspensions. Suitable for 24V fixtures: remote driver 24V needed.



To-be

Accessories / fixing

C € EHI 🗵 🐽

M800

Polycarbonate hook for suspension.







