


PANZERI

Arena

220-240V AC dimmable (DALI/Push DIM) and ON-OFF
L07419.200.0518

 mat brass



Data sheet

| | |
|--------------------------|-------------------------------------|
| CODE | L07419.200.0518 |
| SYSTEM POWER CONSUMPTION | 154W |
| EFFICACY | 81.94lm/W |
| LIGHT SOURCE | LED |
| LIGHT SOURCE LIFETIME | L70 (B50) 60.000h |
| COLOUR TEMPERATURE | 2700K Ra>90 |
| LIGHT DISTRIBUTION | diffused + adjustable |
| BEAM ANGLE | 30° |
| POWER SUPPLY | 220-240V AC |
| FREQUENCY | 50/60Hz |
| ELECTRICAL CONFIGURATION | dimmable (DALI/Push DIM) and ON-OFF |
| DRIVER | integrated included |
| NOMINAL LUMINOUS FLUX | 18290lm |
| LUMEN OUTPUT | 12618lm |
| EFFICIENCY | 69% |
| WEIGHT | 8,80 Kg |
| PROTECTION DEGREE | IP20 |
| COLOUR TOLLERANCES | SDCM 3 |
| PACKING DIMENSIONS | 200,0 x 200,0 x 11,0 cm |



Suspension lighting fixture for interiors, with direct and indirect light emission and swivelling accent light.

Bended extruded aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.

Extruded polycarbonate diffuser with opaline finish.

Die-cast aluminium joints in polyacrylic paint.

Die-cast aluminium projectors rotating on two axes in polyacrylic paint.

Reflectors in thermoplastic material with chrome plated finish.

Textured glass screens.


Anti-glare snoots in black thermoplastic material.

5m (196,9") long steel suspension cables.

5m (196,9") long power cable in transparent PVC.

Power canopy with pickled sheet metal ceiling bracket and covering in white, black, bronze, mat brass or titanium polyacrylic paint.

Technical drawing

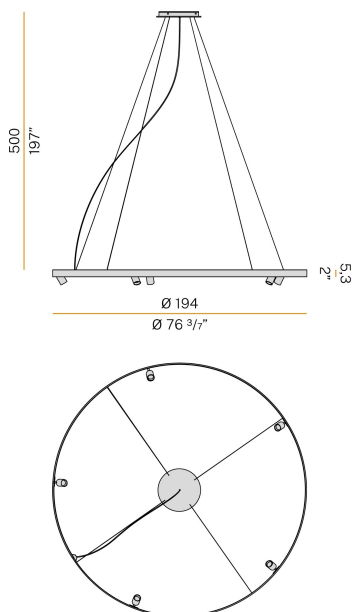

Polar diagram

