


TIO

Adjustable downlights

design Roberto Mantovani

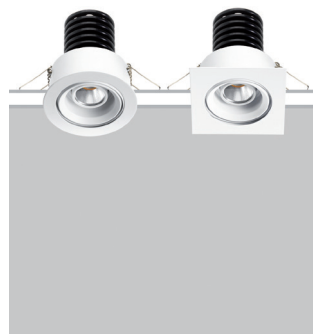

The range of Tio 24 VDC orientable downlights combines high performance and incredible compactness. Revolutionary in dissipative, functional design, it offers the possibility to combine colour temperatures and beam angles in CRI85 and CRI93 versions. The anti-glare filter accessory, which can be applied to the installed product, guarantees optimal viewing comfort.

La gamma di incassi orientabili Tio, alimentati a 24VDC, combina alte prestazioni ad una dimensione incredibilmente contenuta. Rivoluzionari per il design funzionale alla dissipazione, offrono la possibilità di combinare temperature colore ed aperture di fascio nelle versioni a CRI85 ed a CRI93. L'accessorio filtro antiabbagliamento, applicabile a prodotto installato, assicura il miglior comfort visivo dell'installazione.

La gamme d'encastrables orientables Tio, alimentés à 24VDC, associe prestations très élevées et dimension incroyablement contenue. Révolutionnaires pour le design fonctionnel à la dissipation, ils offrent la possibilité d'associer températures, couleur et ouvertures de faisceau dans les versions à CRI85 et à CRI93. L'accessoire filtre anti-éblouissement, applicable au produit installé, assure le meilleure confort visuel de l'installation.

Die ausschwenkbaren Einbauleuchten der Serie Tio, die mit 24VDC versorgt werden, kombiniert hohe Leistung mit einer unglaublich geringen Größe. Der revolutionäre Charakter zeigt sich hier nicht nur im funktionalen Design und der Dissipation, sondern auch in der Möglichkeit, Farbtemperaturen und Strahlöffnungen bei den Versionen CRI85 und CRI93 zu kombinieren. Das Blendschutzfilterzubehör, das auf das installierte Produkt anwendbar ist, gewährleistet den besten visuellen Komfort der Installation.

IP40 made in Italy



Supply current


24VDC

Power


7W

Parallel wiring

Dimensions

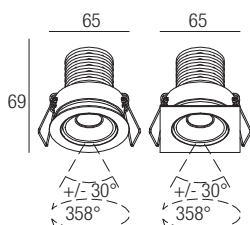


Photometric diagrams

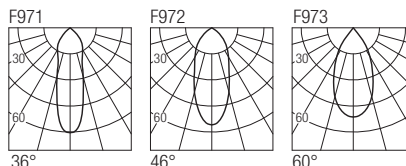

CCT/CRI/Flux

	CRI85	CRI93
2700K	630lm	590lm
3000K	700lm	650lm
4000K	730lm	670lm

Code construction

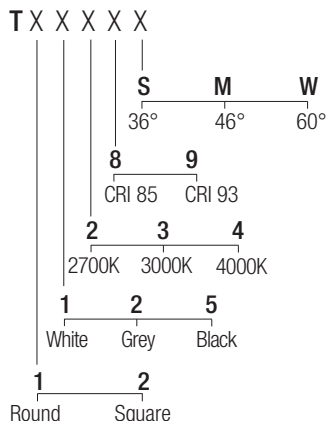


Optionals

SC1001
Milky screen 

Note: the screen must be ordered together with the lighting fixture

Drivers

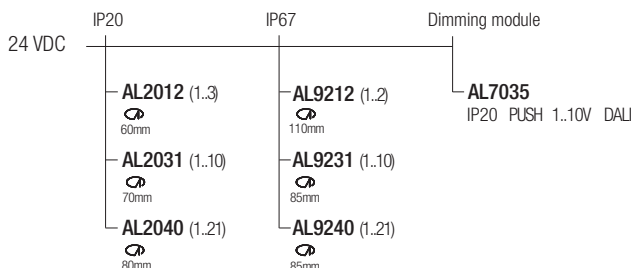

Note: dimming module AL7035 to be used in combination with a 24VDC power supply