

# PANZERI

## Nick


500mA DC  
XR25401.040.1815

● white



### Data sheet

CODE	XR25401.040.1815
SYSTEM POWER CONSUMPTION	4,5W
EFFICACY	99,75lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B10) 50.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	wide flood
BEAM ANGLE	60°
POWER SUPPLY	500mA DC
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	470lm
LUMEN OUTPUT	399lm
EFFICIENCY	84,9%
WEIGHT	0,07 Kg
PROTECTION DEGREE	IP43 IP20
SHOCK RESISTANCE RATING	IK07
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	7,5 x 7,5 x 8,0 cm



Lighting fixture for ceiling built-in installation for interiors, with direct light emission. Built-in structure for permanent false ceilings, in die-cast aluminium in white powder paint.

Textured glass screen.

Anti-glare snoot in black thermoplastic material.


Stainless steel spring clips for false ceiling fixing.

Equipped with 0,3m (11,8") long power cable.

Built-in hole dimension: Ø 36mm (Ø 1,4")




### Technical drawing

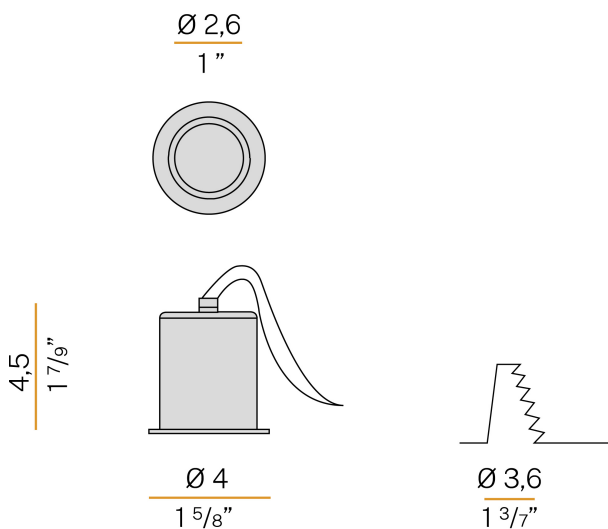

### Application



### Polar diagram

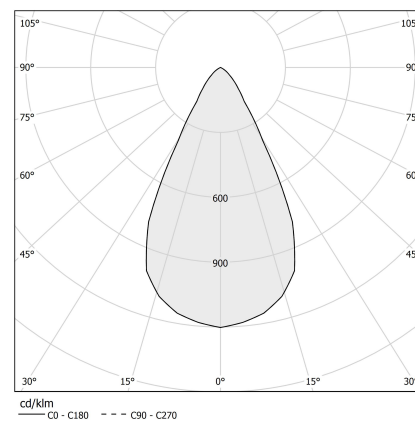


# PANZERI

## Nick

### Accessories / power supply

XM6-20 D/P MULTI

LED driver, 9,2÷28W 200÷900mA, 1-10V/DALI/Push DIM dimmable.



XM6-20 UNI

LED driver, 4÷20W 250÷700mA.

