

PANZERI

Planet Ring

220-240V AC ON-OFF

X08301.070.0401

● white



Data sheet


| | |
|----------------------------|-----------------------|
| CODE | X08301.070.0401 |
| SYSTEM POWER CONSUMPTION | 71W |
| EFFICACY | 82.59lm/W |
| LIGHT SOURCE | LED |
| LIGHT SOURCE LIFETIME | L80 (B20) 80.000h |
| COLOUR TEMPERATURE | 3000K Ra>90 |
| LIGHT DISTRIBUTION | diffused |
| POWER SUPPLY | 220-240V AC |
| FREQUENCY | 50/60Hz |
| ELECTRICAL CONFIGURATION | ON-OFF |
| DRIVER | integrated included |
| NOMINAL LUMINOUS FLUX | 8857lm |
| LUMEN OUTPUT | 5864lm |
| EFFICIENCY | 66.2% |
| WEIGHT | 8,83 Kg |
| PROTECTION DEGREE | IP40 IP20 |
| COLOUR TOLLERANCES | SDCM 3 |
| GLOW WIRE TEST PERFORMANCE | 850° |
| PACKING DIMENSIONS | 68,0 x 68,0 x 18,0 cm |



Lighting fixture for ceiling built-in installation for interiors, with direct light emission. Built-in structure for permanent false ceilings, in pickled sheet metal in white polyacrylic paint. Aluminium dissipation plate. Pickled sheet metal closing frame in polyacrylic paint. Modelled polycarbonate diffuser with opaline finish. Galvanized sheet metal brackets for false ceiling fixing. Built-in hole dimension: Ø 655mm (Ø 25,8")



Technical drawing

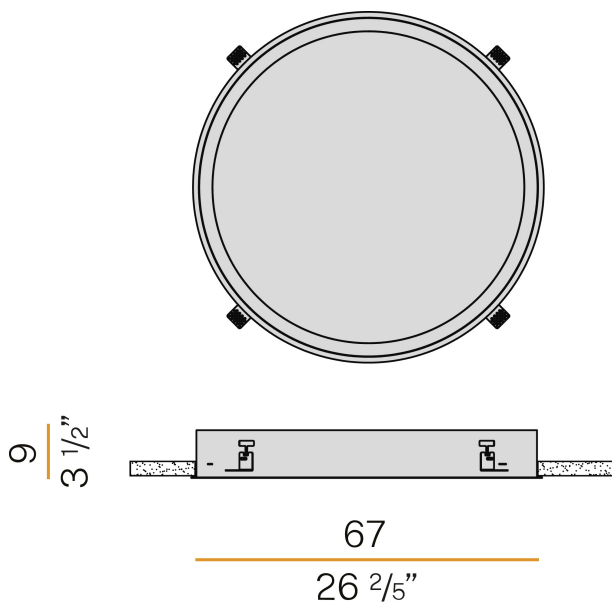

Polar diagram

