

INVIDIA





INCASSO A LINEA CONTINUA.

Invidia, sistema modulare da interni in linea continua a scomparsa totale in AirCoral® per installazione in parete e soffitto di cartongesso.

L'integrazione totale consente di definire gli spazi architettonici sia a parete che a soffitto; la particolare sovrapposizione delle sorgenti luminose evita qualsiasi cono d'ombra e lo schermo in policarbonato satinato permette una diffusione omogenea e delicata, in grado di definire precisi percorsi di luce continui e concettualmente infiniti.

RECESSED FITTING WITH CONTINUOUS LINE.

The perfect combination of light, architecture and emotion: thanks to Invidia, a totally disappearing continuous line modular indoor system made of AirCoral®, installable on walls and plasterboard ceilings. This complete integration inside walls or ceilings allows the definition of architectural spaces; the particular overlapping of light sources avoids any kind of "shadow cone" and its satined polycarbonate screen allows for a uniform and delicate lighting, able to define precise, continuous bright paths.

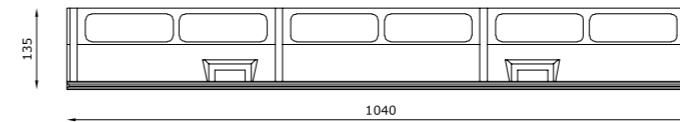


TECHNICAL FEATURES | BODYFRAME

Code	6640.AC (fig. A)	6650.AC (fig. A)
Material	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	37.4 m²	37.4 m²
Weight	17 Kg	17 Kg
Mounting	Ceiling recessed	Wall recessed
IP rating	IP40	IP40
Cut out for plasterboard	(1040 mm for each module installed + 410 mm) x 215 mm	(1040 mm for each module installed + 410 mm) x 215 mm
Light hole	(1040 mm for each module installed) x 85 mm	(1040 mm for each module installed) x 85 mm
Note	-	-



TECHNICAL FEATURES | CLOSURE HEADPARTS

Code	6631.AC (fig. B)
Material	AC: AirCoral®
Absorption capacity*	18.12 m²
Weight	-
Mounting	Ceiling and wall recessed
IP rating	-
Cut out for plasterboard	210 x 210 mm
Note	You need two headparts delivered as couple with a unique code 6631.AC to close a continuous line of the INVIDIA product (code 6640.AC / 6650.AC).

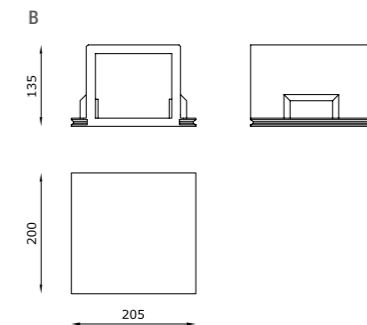



TECHNICAL FEATURES | PROTECTION SHIELD

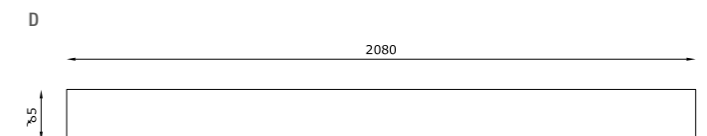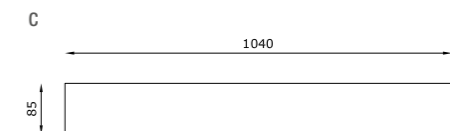Code	6600 (fig. C)	6601 (fig. D)
Material	Satin polycarbonate	Satin polycarbonate
Dimensions	1040 x 85 mm	2080 x 85 mm
Note	-	-




TECHNICAL FEATURES | LIGHT SOURCE

Code	6639
Type	Downlight 90° Wall recessed 90° 
Weight	-
IP rating	IP40
Insulation class	III
Control gear	Constant voltage driver
Lamp type	LED 24V 
Lamp wattage	1 x 28W
Luminous efficacy	2800 lm
Light distribution	Wide beam 120°
Fitting	-
Light colour	White 3000K White 2700K (on request)
Light hole	-
Voltage connection	220-240V / 24V · 50/60Hz
CRI	>90
Emergency	-
Energy efficiency class	A++
Note	-

EXAMPLE OF INSTALLATION

Note Attention, the code 6640.AC / 6650.AC must be installed for multiples of 1040 mm and cannot be cut

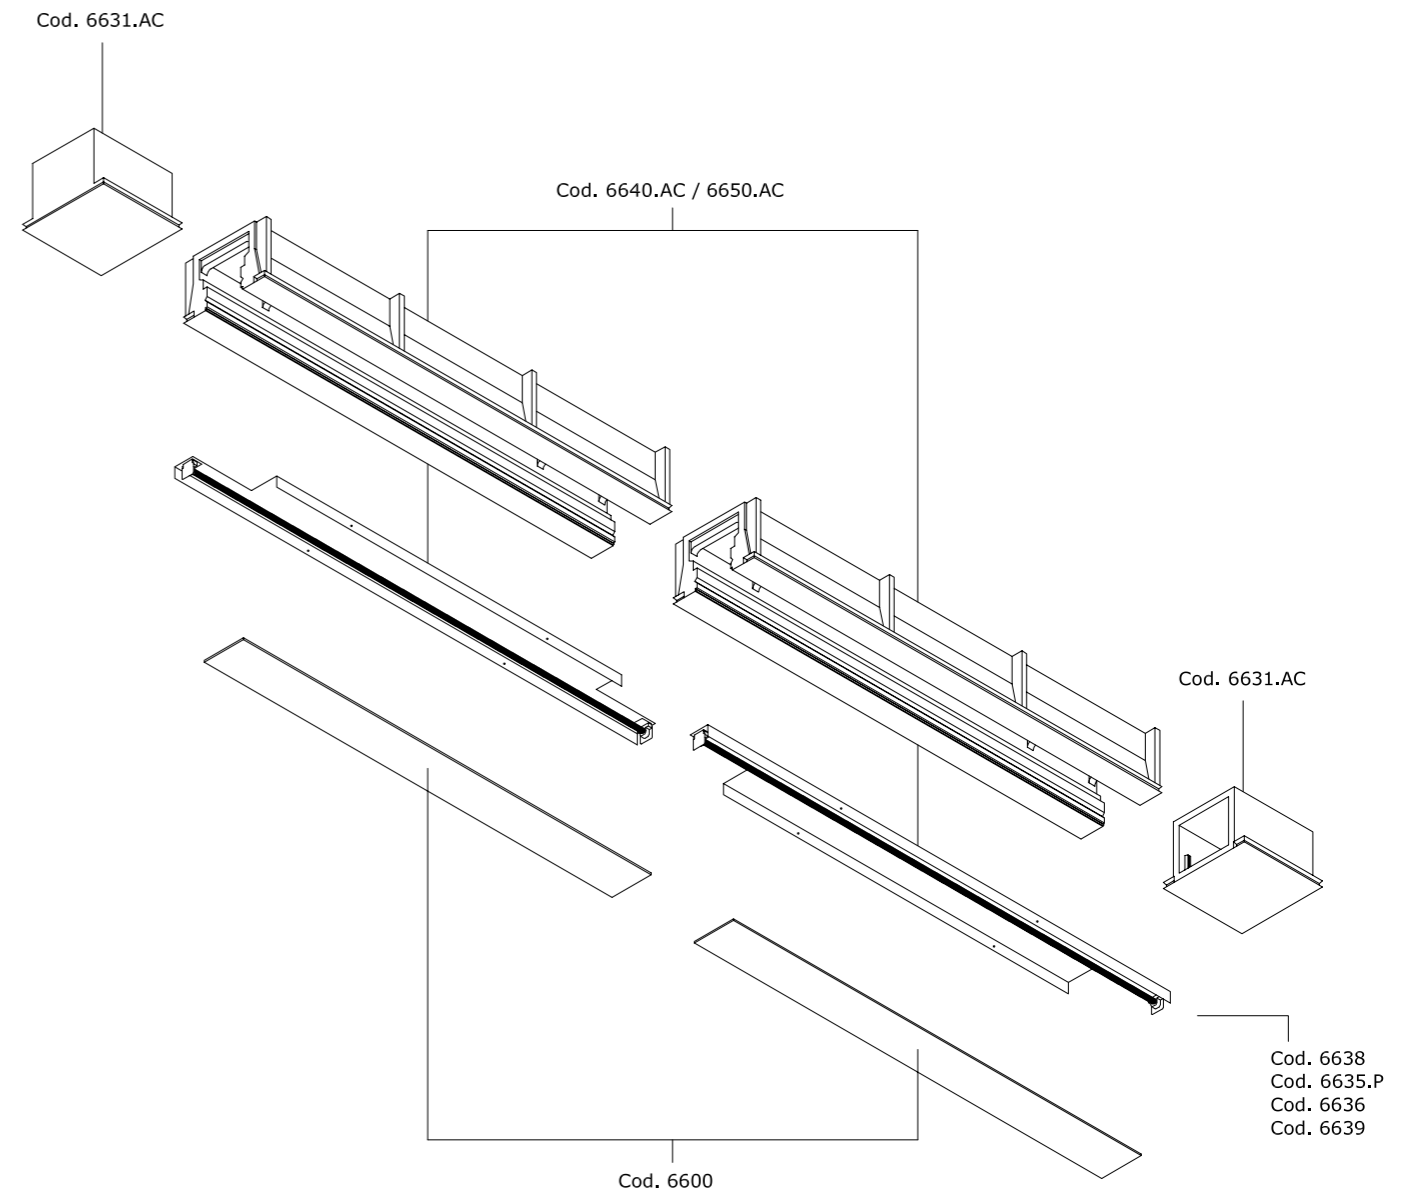



CNA - Rome