

PANZERI

Flat

220-240V AC dimmable (DALI/Push DIM)

L07501.051.0402

● white




Data sheet

CODE	L07501.051.0402
SYSTEM POWER CONSUMPTION	61W
EFFICACY	62.25lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 60.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (DALI/Push DIM)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	6520lm
LUMEN OUTPUT	3797lm
EFFICIENCY	58.2%
WEIGHT	7,21 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	19,5 x 62,5 x 63,5 cm



Suspension lighting fixture for interiors, with direct and indirect light emission.
Pickled sheet metal structure in polyacrylic paint.
Aluminium dissipation plate.
Pickled sheet metal closing frames in white polyacrylic paint.
Modelled polycarbonate diffuser with opaline finish.
Suspension kit with griplocks and 2m (78,7") long steel cables.
2,2m (86,6") long power cable in transparent PVC.
Power canopy with pickled sheet metal ceiling bracket and covering in white polyacrylic paint.

Technical drawing

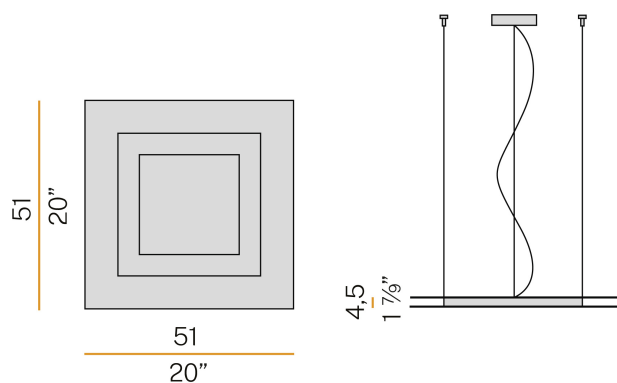

Polar diagram

