

RHINO




ESTRAIBILE E ORIENTABILE.

Rhino, apparecchio da interni in Coral® per installazione a soffitto o parete di cartongesso, è un prodotto versatile e funzionale, caratterizzato da un incasso a scomparsa totale e un faretto estraibile e direzionabile, dotato di lenti intercambiabili. Rhino è in grado di illuminare gli ambienti in modo determinante, arricchendoli semplicemente grazie a giochi di luce spot e sempre diversi. Il proiettore può essere posizionato in diversi modi dalla posizione completamente esterna a retrocessa. Quest'ultima posizione è studiata per avere il minimo impatto visivo. Quando non recesso è orientabile di 360° sull'asse orizzontale e 90° sull'asse verticale.

EXTRACTABLE AND ADJUSTABLE.

Rhino, an indoor totally disappearing recessed luminaire made of Coral®, installable on plasterboard ceilings or walls, is a versatile product, characterized by an extractable recess with interchangeable lens. It enlightens spaces perfectly and in a very incisive way, enriching them with ever-changing plays of light. The projector can be oriented in several ways, in a completely external position or in a recessed one. The latter, conceived to obtain a minimal visual impact. When the projector is not recessed it is 360° adjustable on the horizontal line and 90° on the vertical one.

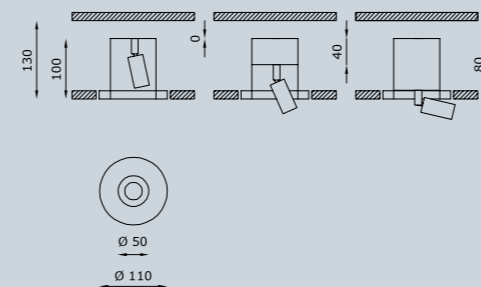

Recessed



TECHNICAL FEATURES

Code	1841.00	1843.00
Type	Tiltable downlight ± 360° / ± 90° 	Tiltable downlight ± 360° / ± 90°
Material	00: Coral®	00: Coral®
Finishing	Black	White
Weight	0.8 Kg	0.8 Kg
Mounting	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP40	IP40
Insulation class	III	III
Control gear	Constant current electronic driver (not included)	Constant current electronic driver (not included)
Cut out for plasterboard	Ø 120 mm	Ø 120 mm
Lamp type	LED 500 mA Vf: 11 VDC	LED 500 mA Vf: 11 VDC
Lamp wattage	1 x 6W	1 x 6W
Luminous efficacy	520 lm - 3000K	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)	Beam 22° Beam 50° (on request)
Fitting	-	-
Light colour	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)
Light hole	Ø 50 mm	Ø 50 mm
Voltage connection	By driver (optional)	By driver (optional)
CRI	>90	>90
Emergency	-	-
Energy efficiency class	A++	A++
Note	On request available dimmable PUSH or DALI.	On request available dimmable PUSH or DALI.

OPTIONAL ACCESSORIES

product code	optional code	description	info
1841.00 / 1843.00	H8500.E	Constant current electronic driver. Remote installation	Suitable for n°3 code 1841.00 / 1843.00 - 500 mA
	H8500.C	Constant current electronic driver	Suitable for n°1 code 1841.00 / 1843.00 - 500 mA



Showroom - Dubai