

TEKNO



INCASSO CON VETRO RETROCESSO, MASSIMA INVISIBILITÀ.


La tecnologia si trasforma in emozione grazie a Tekno, incasso a scomparsa totale da interni in AirCoral® per installazione in soffitto di cartongesso o laterizio che, con la sua luce, avvolge gli ambienti trasmettendo sensazioni di delicato benessere e armonia.

Un design pulito ed essenziale per dare assoluto risalto all'effetto luminoso che, senza nessuna esitazione, valorizza gli spazi e gli arredi.

RECESSED FITTING WITH REAR GLASS, MAXIMUM INVISIBILITY.

Technology becomes emotion thanks to Tekno, a totally disappearing recessed luminaire made of AirCoral®, installable on plasterboard or brick ceilings: with its light, it wraps spaces up spreading sensation of delicate well-being and harmony.

A clean and essential design to give absolute prominence to the lit effect which, with no hesitation, enhances spaces and furniture.

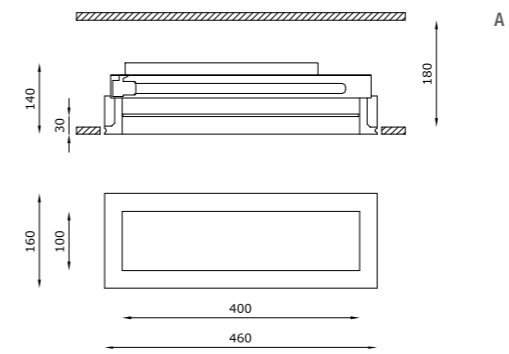


TECHNICAL FEATURES

Code	6034.AC (fig. A)	6036.AC (fig. A)	6038.P.AC (fig. A)	6051.AC (fig. A)	6052.AC (fig. A)
Type	Downlight 90°	Downlight 90°	Downlight 90°	Downlight 90°	Downlight 90°
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	11.04 m²	11.04 m²	11.04 m²	11.04 m²	11.04 m²
Weight	4.7 Kg	5.5 Kg	5.9 Kg	6 Kg	6 Kg
Mounting	Ceiling recessed	Ceiling recessed	Ceiling recessed	Ceiling recessed	Ceiling recessed
IP rating	IP40	IP40	IP40	IP40	IP40
Insulation class	I	I	I	III	III
Control gear	Electronic ballast	Electronic ballast	Dimmable electronic ballast	Constant current electronic driver	Constant current electronic driver
Cut out for plasterboard	170 x 470 mm	170 x 470 mm	170 x 470 mm	170 x 470 mm	170 x 470 mm
Lamp type	TC-L 	TC-L 	TC-L 	LED 350 mA 	LED 350 mA
Lamp wattage	1 x 36W	1 x 36W	1 x 36W	1 x 12W	2 x 12W
Luminous efficacy	-	-	-	1640 lm - 3000K	2 x 1640 lm - 3000K
Light distribution	-	-	-	Wide beam 120°	Wide beam 120°
Fitting	2G11	2G11	2G11	-	-
Light colour	-	-	-	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)
Light hole	100 x 400 mm	100 x 400 mm	100 x 400 mm	100 x 400 mm	100 x 400 mm
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	-	-	-	>90	>90
Emergency	-	1 hour	-	-	-
Energy efficiency class	A	A	A	A+	A+
Note	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling.	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling.	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling.	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling.	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling.

Standard: dimmable switch dim. / push (on request: dimmable 1-10V or DALI).

OPTIONAL ACCESSORIES

product code	optional code	description	info
6034.AC	BR6034LT	Brick box	Dimensions L: 570 mm; W: 170 mm; D: 160 mm (instructions on page 502)
6036.AC	BR6036LT	Brick box	Dimensions L: 570 mm; W: 170 mm; D: 160 mm (instructions on page 502)
6038.P.AC	BR6038PLT	Brick box	Dimensions L: 570 mm; W: 170 mm; D: 160 mm (instructions on page 502)
6051.AC	BR6051LT	Brick box	Dimensions L: 570 mm; W: 170 mm; D: 160 mm (instructions on page 502)
6052.AC	BR6052LT	Brick box	Dimensions L: 570 mm; W: 170 mm; D: 160 mm (instructions on page 502)

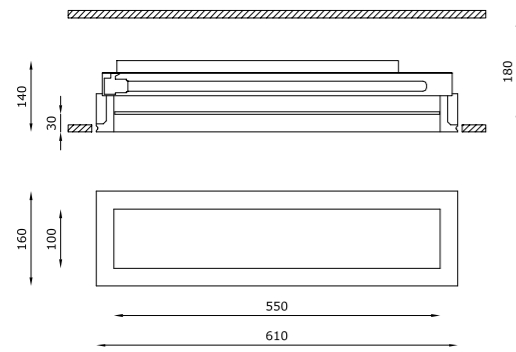


B

TECHNICAL FEATURES

Code	6025.AC (fig. B)	6027.AC (fig. B)	6029.PAC (fig. B)
Type	Downlight 90° 	Downlight 90° 	Downlight 90°
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	13.95 m²	13.95 m²	13.95 m²
Weight	5.4 Kg	6.2 Kg	6.4 Kg
Mounting	Ceiling recessed	Ceiling recessed	Ceiling recessed
IP rating	IP40	IP40	IP40
Insulation class	I	I	I
Control gear	Electronic ballast	Electronic ballast	Dimmable electronic ballast
Cut out for plasterboard	170 x 620 mm	170 x 620 mm	170 x 620 mm
Lamp type	TC-L 	TC-L 	TC-L
Lamp wattage	1 x 55W	1 x 55W	1 x 55W
Luminous efficacy	-	-	-
Light distribution	-	-	-
Fitting	2G11	2G11	2G11
Light colour	-	-	-
Light hole	100 x 550 mm	100 x 550 mm	100 x 550 mm
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	-	-	-
Emergency	-	1 hour	-
Energy efficiency class	A	A	A
Note	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling.	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling.	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling. Standard: dimmable switch dim. / push (on request: dimmable 1-10V or DALI).

OPTIONAL ACCESSORIES

product code	optional code	description	info
6025.AC	BR6025LT	Brick box	Dimensions L: 720 mm; W: 170 mm; D: 160 mm (instructions on page 502)
6027.AC	BR6027LT	Brick box	Dimensions L: 720 mm; W: 170 mm; D: 160 mm (instructions on page 502)
6029.PAC	BR6029PLT	Brick box	Dimensions L: 720 mm; W: 170 mm; D: 160 mm (instructions on page 502)

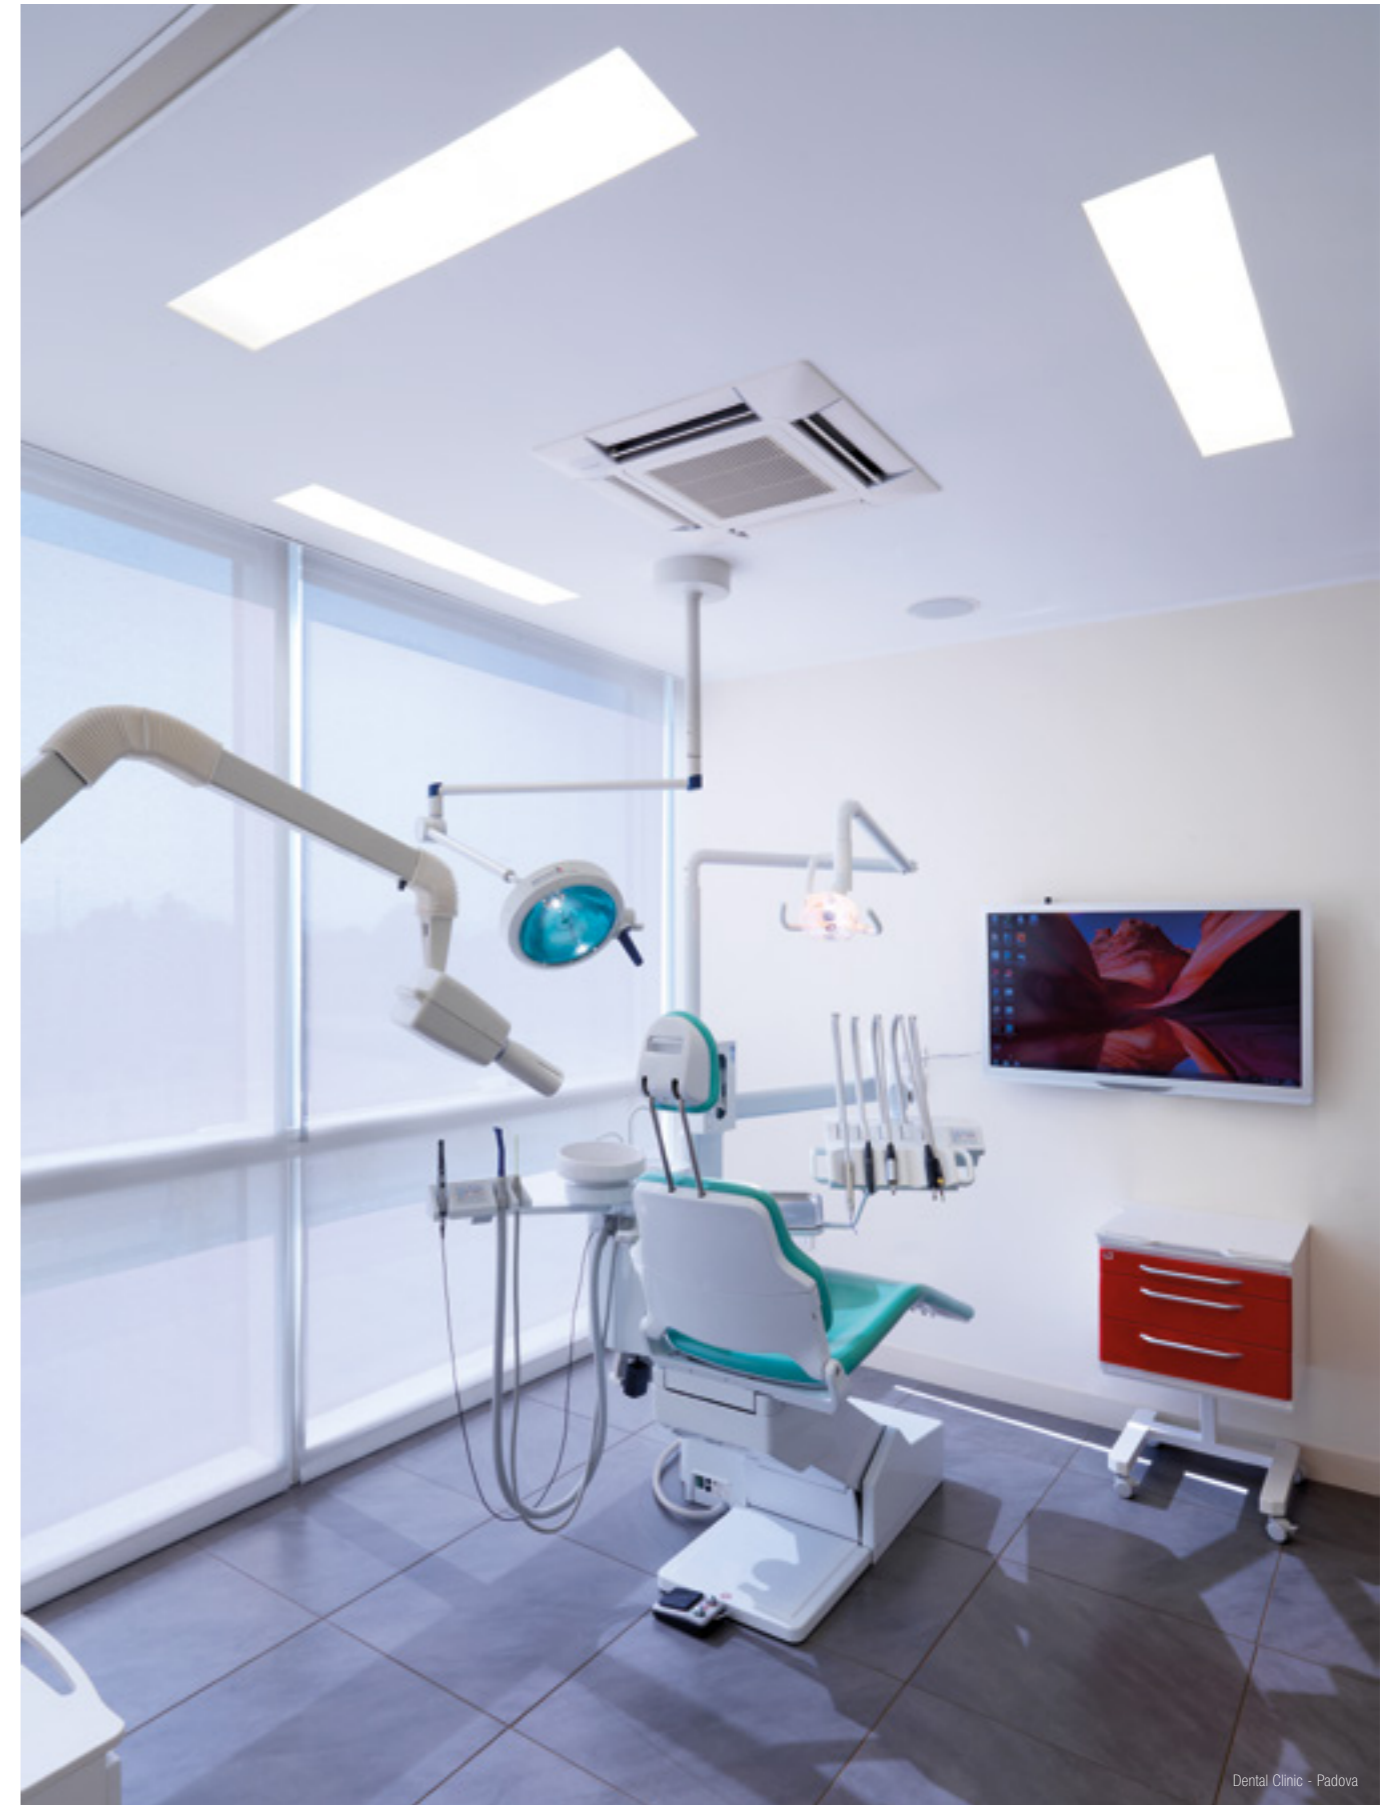

Dental Clinic - Padova

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2,7 m in height and therefore expressed in m²