

PANZERI

Hilow Line

220-240V AC dimmable (DALI/Push DIM)

A11019.150.0502

 mat brass

INDIRECT
LIGHT


Data sheet

| | |
|--------------------------|--------------------------|
| CODE | A11019.150.0502 |
| SYSTEM POWER CONSUMPTION | 27W |
| EFFICACY | 62.8lm/W |
| LIGHT SOURCE | LED |
| LIGHT SOURCE LIFETIME | L70 (B10) 60.000h |
| COLOUR TEMPERATURE | 2700K Ra>90 |
| LIGHT DISTRIBUTION | diffused |
| POWER SUPPLY | 220-240V AC |
| FREQUENCY | 50/60Hz |
| ELECTRICAL CONFIGURATION | dimmable (DALI/Push DIM) |
| DRIVER | integrated included |
| NOMINAL LUMINOUS FLUX | 2520lm |
| LUMEN OUTPUT | 1696lm |
| EFFICIENCY | 67.3% |
| WEIGHT | 1,35 Kg |
| PROTECTION DEGREE | IP20 |
| COLOUR TOLLERANCES | SDCM 3 |
| PACKING DIMENSIONS | 12,0 x 160,0 x 7,0 cm |



Wall lighting fixture for interiors, with indirect light emission.
Pickled sheet metal wall bracket in polyacrylic paint.
Pickled sheet metal wall plate in polyacrylic paint.
Extruded aluminium structure in white, mat black, bronze, mat brass or titanium polyacrylic paint.
Die-cast aluminium end caps in polyacrylic paint.
Extruded polycarbonate diffuser with opaline finish.

Technical drawing

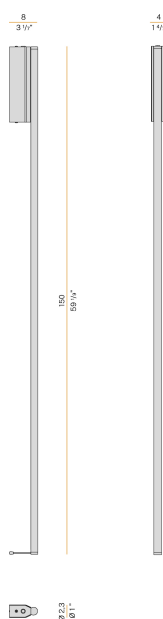

PANZERI

Hilow Line

Accessories / power supply

YCI11002.400

4m (157,5") long power cable with foot switch and plug.

