
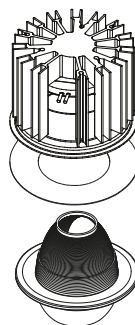


technics




Led assembly

Ring in case of Fixed



Reflector in case of WW

Name	Reference	Current	D	H
Module 80 LED WW CRI83	KR91733x-83xx	700mA	74	79
Module 80 LED WW CRI98	KR91733x-98xx	500mA	74	79
Module 80 LED FIXED CRI83	KR917033-83xx	700mA	74	57
Module 80 LED FIXED CRI98	KR917033-98xx	500mA	74	57

1 dimensions

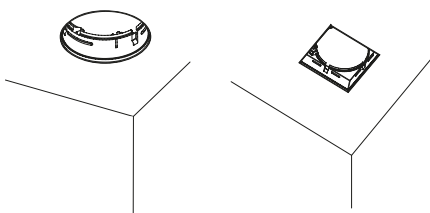

Please make sure that main voltage is disconnected before proceeding!

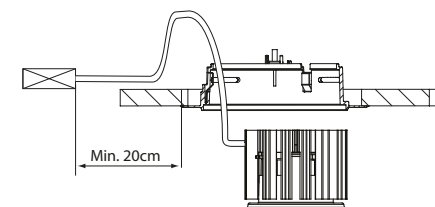



2 installation

To install the plasterkit. See installation manual KR8170001755 or KR8170001758.


Install the correct gear with strain relief on the hollow ceiling.

Important: always check the polarity!!
+ = red wire - = black wire


Put the LED assembly in the plasterkit, together with the ring (in case of Fixed version).

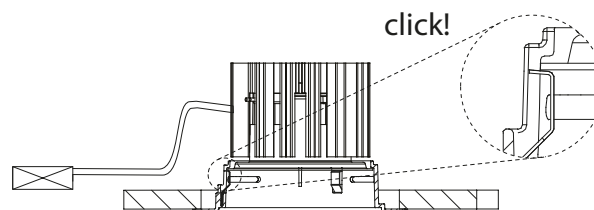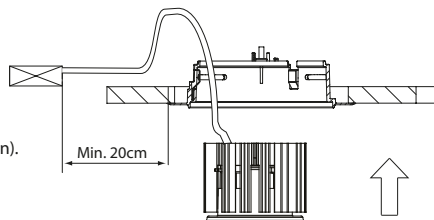


In case of WW

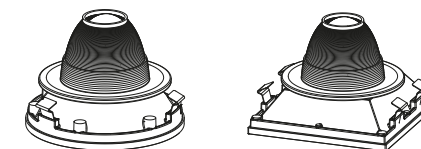

3 installation

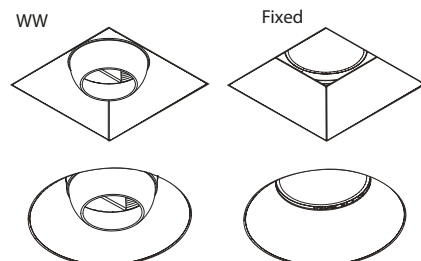

In case of WW



Put the reflector on the louvre.

4 installation

To install the louvre see manual KR8170001761 or KR8170001762