## Clio

### 220-240V AC

M09455.000.0200





#### Data sheet

CODE	M09455.000.0200
SYSTEM POWER CONSUMPTION	max 57W
LIGHT SOURCE	LED retrofit / halogen
LIGHT SOURCE KIT	* included
COMPATIBLE SOURCES	LED retrofit bulb 8W E27 2700K Ra80 1050lm (no dimming) * / max 57W E27
COLOUR TEMPERATURE	2700K Ra>80
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
NOMINAL LUMINOUS FLUX	1050lm
WEIGHT	1,29 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM <6
PACKING DIMENSIONS	0,0 x 0,0 x 0,0 cm












Multiple suspension lighting fixture for interiors, with direct and indirect light emission.  $Structure\ in\ pressed\ rough\ aluminium\ and\ pickled\ sheet\ metal\ in\ polyacrylic\ paint.$  $\hbox{Diffuser in blown glass with white, crystal, steel, amber, bronze, to bacco or green } \\$ ribbing finish.

Pickled sheet metal closing disk in black or mat brass polyacrylic paint.  $3.5 \mathrm{m}$  (137,8") long suspension and power cable in PVC with black fabric covering.  $\label{provided} \mbox{Provided without power canopy, complete with polycarbonate hook.}$ 

### Technical drawing




# Clio

## Accessories / power supply

M7901/1	Canopy for power supply.		2,4
CE EHI 🗵 🙉		•	10,6 4 1/6"
M7901/2	Canopy for power supply with 2 outputs.		4,1 <u>+</u>
CE EHI 🗵 🙉		<b>a</b>	10,6
M7901/3	Canopy for power supply with 3 outputs.		2,4
CE EHI X		0 0	10,6
M7902/1	Canopy for power supply.		4.7
CE EHI X		•	10,6
M7902/2	Canopy for power supply with 2 outputs.		2,4
CE EHI X		(n)	10,6
M7902/3	Canopy for power supply with 3 outputs.		4,7 1.1
CE EHI X		( o o o	10,6
M91/94/9702	Canopy for power supply up to 9 M091000.0200/M094000.0200/M097000.0200 models maximum.	4	14/-
CE EM 🗵 🙉		•	

## Clio

### Accessories / power supply and fixing

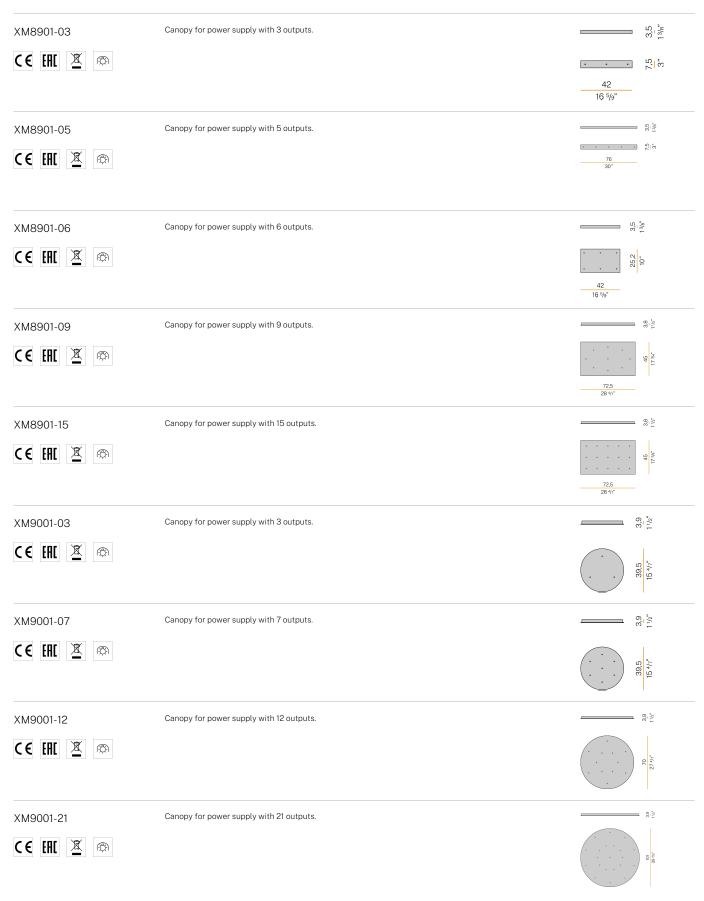

# Clio

## Accessories / power supply and fixing

XM9201-01

CE EHI 🗵 🙉

Recessed canopy for electric cable suspensions. Suitable for 24V fixtures: remote driver 24V needed.





# Clio

## Accessories / fixing

