

PRODUCT:

**POP STANDARD CLUSTER**

TECH SPEC

Manufactured to BS EN 60598-1:2015

Last updated: 10.07.2017 (BE)

**PRODUCT**

WEB LINK:

→ [rothschildbickers.com/pop-standard-clusters](http://rothschildbickers.com/pop-standard-clusters)

LAMPHOLDER:

Standard E14 fitting / SES bulb

ELECTRICAL:

AC 220-240V Nominal frequency 50Hz

MAX WEIGHT INC. 2M FLEX

Standard: 5.5KG

CEILING PLATE:

Standard: 265mm

MINIMUM DROP

Standard: 890mm



**OPTIONS**

SHAPE:

Standard

METAL FINISH:

Plate available in powder coated White  
looms available in all standard colours

→ [rothschildbickers.com/metal](http://rothschildbickers.com/metal)

FLEX:

Standard colours & styles (3 core 0.75mm)

→ [rothschildbickers.com/flex](http://rothschildbickers.com/flex)

Supplied standard with 2m (can be cut on site)

Extra length up to 12m on request

GLASS COLOUR:

Standard colours -



→ [rothschildbickers.com/glass-colours](http://rothschildbickers.com/glass-colours)

GLASS FINISH:

Plain, Diamond and Optic

**INCLUDED IN THE BOX & DIMENSIONS**

- 3 x Glass shades
- 3 x Electrical looms wired with flex
- 1 x Standard 265mm D ceiling plate
- 1 x Ceiling plate back strap & fixings
- 4 x Side fixing screws
- 3 x Wago connectors & earth lead
- 3 x E14 Bulb
- 1 x Installation guide

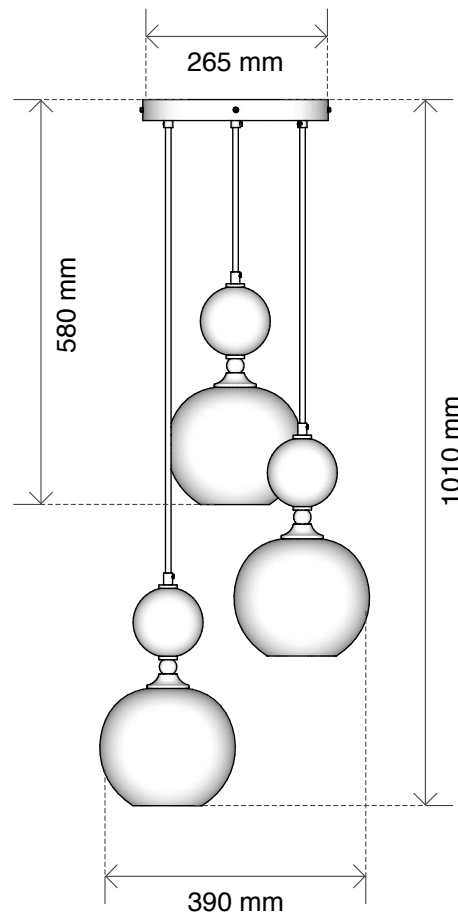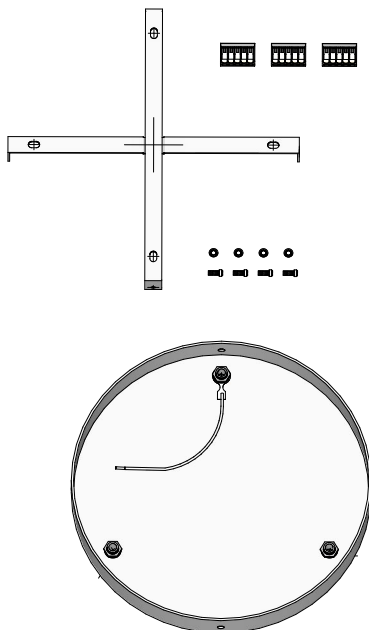

Recommended drop height shown (1010mm)  
\*Minimum 890mm