

BULL




ESTRAIBILE DALL'INCASSO E ORIENTABILE.

Un occhio puntato su un elemento da valorizzare, su un arredo da enfatizzare: Bull, apparecchio da interni a scomparsa totale per installazione a soffitto di cartongesso, è composto da un incasso in Coral®, una cassa posteriore nera in acciaio completa di proiettore orientabile, che può essere estratto dall'incasso per un puntamento preciso del fascio luminoso. Il proiettore in posizione arretrata è studiato per avere il minimo impatto visivo, è orientabile di 360° sull'asse orizzontale e di 90° sull'asse verticale, inoltre ha la possibilità di ottiche intercambiabili. Illuminare con Bull vuol dire dare risalto a precisi elementi, definendo gli spazi e stabilendo nuove prospettive.

ADJUSTABLE AND EXTRACTABLE FROM RECESSED FITTING.

An eye focused on an element to be enhanced, on a decor to be exalted: Bull, an indoor totally disappearing recessed luminaire, installable on plasterboard ceilings, is composed by a Coral® body, a rear black-coloured steel case provided with an adjustable spotlight, which can be extracted from the recess in order to redirect luminescent beams in a more precise way. The rear spotlight, designed for having a minimal visual impact, is 360° orientable on the horizontal line and 90° on the vertical one. With Bull, lighting means giving prominence to precise elements, defining spaces and setting new interchangeable optical perspectives.


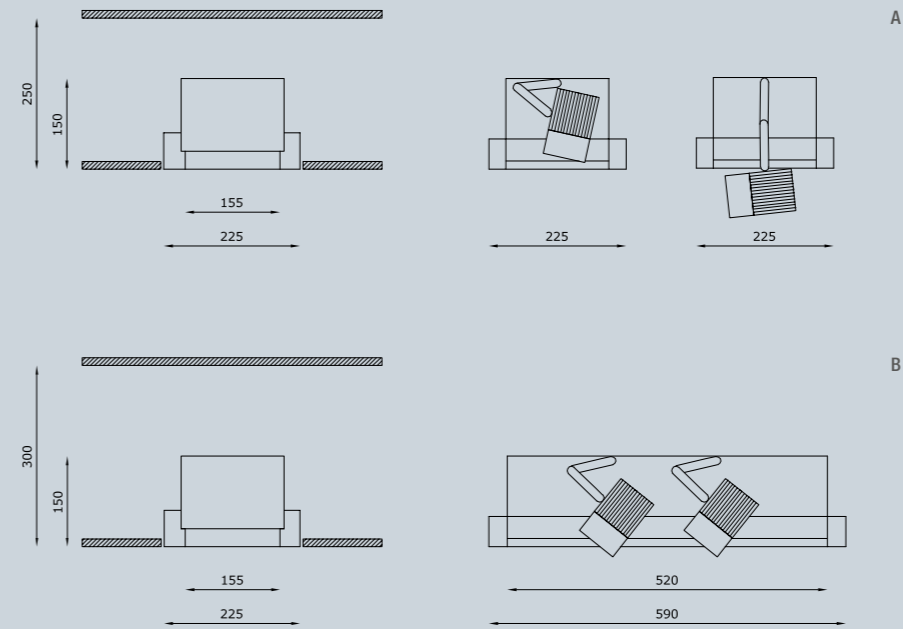


TECHNICAL FEATURES

Code	1811.00 (fig.A)	1812.00 (fig.B)
Type	Tilttable downlight ± 360° / ± 90° 	Tilttable downlight ± 360° / ± 90°
Material	00: Coral®	00: Coral®
Weight	4,5 Kg	7 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP40	IP40
Insulation class	III	III
Control gear	Constant current electronic driver (not included)	Constant current electronic driver (not included)
Cut out for plasterboard	235 x 235 mm	235 x 600 mm
Lamp type	LED 700 mA ⚡ V _f : 37 VDC	LED 700 mA ⚡ V _f : 2 x 37 VDC
Lamp wattage	1 x 26W	2 x 26W
Luminous efficacy	3500 lm - 3000K	2 x 3500 lm - 3000K
Light distribution	Beam 24° Beam 38° (on request)	Beam 24° Beam 38° (on request)
Fitting	-	-
Light colour	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)
Light hole	155 x 155 mm	155 x 520 mm
Voltage connection	By driver (optional)	By driver (optional)
CRI	>90	>90
Emergency	-	-
Energy efficiency class	A++	A++
Note	On request available dimmable PUSH or DALI.	On request available dimmable PUSH or DALI.



OPTIONAL ACCESSORIES

product code	optional code	description	info
1811.00	H8730	Constant current electronic driver	You need n°1 code H8730 for n°1 code 1811.00 - 700 mA
1812.00	H8730	Constant current electronic driver	You need n°2 code H8730 for n°1 code 1812.00 - 700 mA

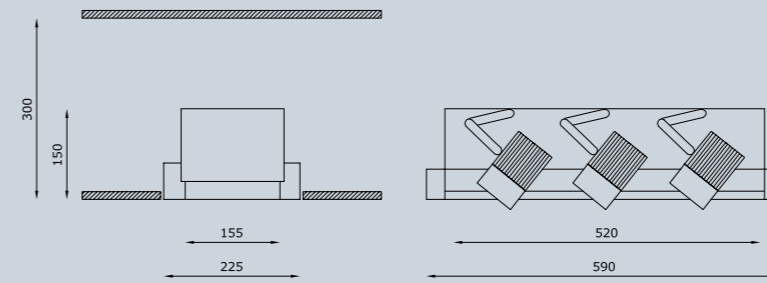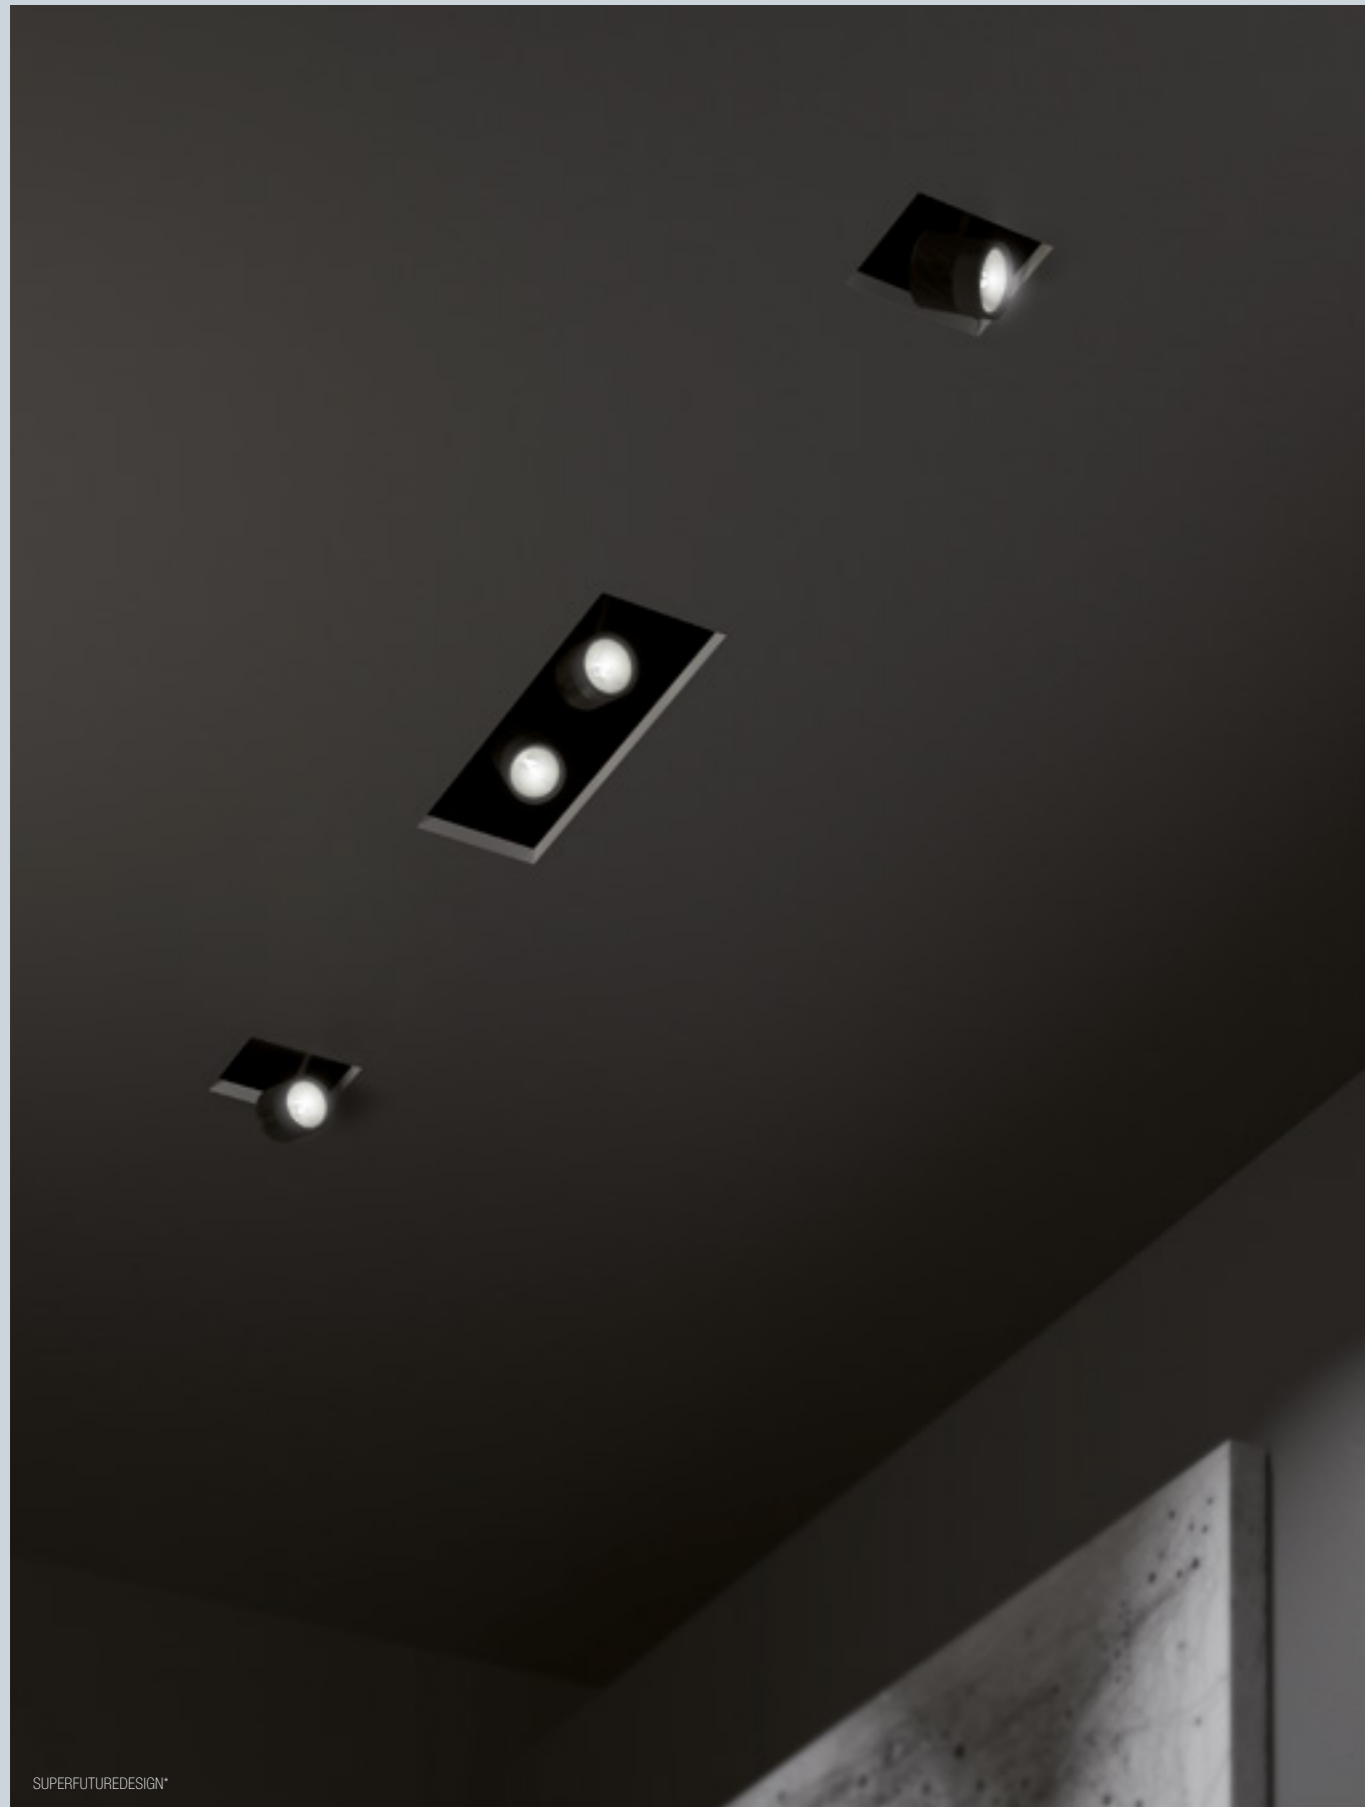

C

TECHNICAL FEATURES

Code	1813.00 (fig.C)
Type	Tilttable downlight $\pm 360^\circ / \pm 90^\circ$ 
Material	00: Coral®
Weight	10 Kg
Mounting	Ceiling recessed
IP rating	IP40
Insulation class	III
Control gear	Constant current electronic driver (not included)
Cut out for plasterboard	235 x 600 mm
Lamp type	LED 700 mA  Vf: 3 x 37 VDC
Lamp wattage	3 x 26W
Luminous efficacy	3 x 3500 lm - 3000K
Light distribution	Beam 24° Beam 38° (on request)
Fitting	-
Light colour	White 3000K White 2700K 4000K (on request)
Light hole	155 x 520 mm
Voltage connection	By driver (optional)
CRI	>90
Emergency	-
Energy efficiency class	A++
Note	On request available dimmable PUSH or DALI.

OPTIONAL ACCESSORIES

product code	optional code	description	info
1813.00	H8730	Constant current electronic driver	You need n°3 code H8730 for n°1 code 1813.00 - 700 mA