



- Linear LED Uplight
- Stainless steel body
- Opal plexiglass diffuser
- Plastic cable glands resistant to corrosion, atmospheric conditions and salt spray
- IP67 power supply integrated in the product body
- In/out IP68 plugs for cascade connection included
- Stainless steel housing for installation included
- Stainless steel external screws
- Max Number of connectable projectors: 30
- Maximum permissible ambient temperature + 50 °C
- The light source and power supply unit contained in this lamp can be replaced by qualified personnel without permanent damage to the product

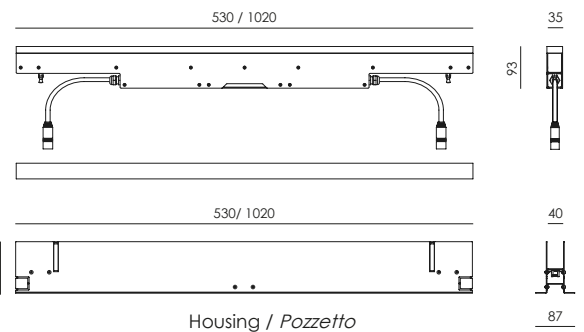

- *Proiettore LED lineare a pozzetto*
- *Corpo in acciaio inox*
- *Diffusore in plexiglass opale*
- *Pressacavi in plastica resistenti agli agenti atmosferici, alla corrosione ed alle nebbie saline*
- *Alimentatore IP67 integrato nel corpo del prodotto*
- *Connettori IP68 per collegamento in cascata inclusi*
- *Controcassa per installazione in acciaio inox inclusa*
- *Viti esterne in acciaio inox*
- *Numero massimo di proiettori collegabili: 30*
- *Temperatura ambiente massima ammissibile +50 °C*
- *La sorgente luminosa e l'unità di alimentazione contenute in questa lampada possono essere sostituite da parte di addetti qualificati senza danni permanenti al prodotto*

SUITABLE FOR CONTINUOUS LINES INSTALLATION  
ADATTO PER INSTALLAZIONI A LINEE CONTINUE




Lamp / Lampada LED STRIP	Input / Alimentazione 220/240V 50/60Hz	Power / Potenza 7,5 / 15 / 30 W	Color Tolerance/ Tolleranza Cromatica 2-SDCM / 3-SDCM	CRI / CRI 80 MIN
--------------------------------	--	---------------------------------------	---	------------------------



NEXO LUCE (Factory)  
Strada Mirabella, 10  
46040 Cavriana (MN), ITALY  
T +39 0376 771513 F +39 0376 772235  
sales@nexoluce.com www.nexoluce.com

Made in Italy

© Nexo Luce, a company incorporated in Italy. The logo and the name are the property of Nexo Luce SRL. The present datasheet and its content in whole or in part are the property of Nexo Luce SRL. All rights reserved. We reserve the right to change details and specifications without prior written notice.

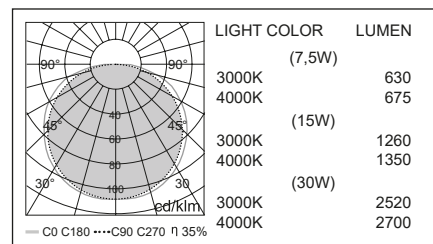

MAIN CODE CODICE BASE	RELEASE EDIZIONE	LIGHT COLOR COLORE LUCE	WATT WATT	OPTIC OTTICA	CONTROL CONTROLLO	LENGTH LUNGHEZZA
<b>2329</b>	<b>.2</b>	<b>B</b> 3000K	<b>A75</b> 7.5W <small>(0.5M LENGTH ONLY)</small>	<b>AD</b> OPAL DIFFUSER	<b>1</b> ON/OFF	<b>05</b> 0.5m
		<b>C</b> 4000K	<b>.15</b> 15W			<b>10</b> 1.0m
		<b>L</b> BLUE	<b>.30</b> 30W <small>(1.0M LENGTH ONLY)</small>			
		* others on request / altri su richiesta				

CODE EXAMPLE : Projector with warm white light color at 3000K, 30W, opal diffuser, ON/OFF control, 1m length  
2329.2B.30AD110

ESEMPIO DI CODIFICA : Proiettore con luce calda a 3000K, 30W, diffusore opale, controllo ON/OFF, lunghezza 1m  
2329.2B.30AD110

NEXO LUCE (Factory)  
Strada Mirabella, 10  
46040 Cavriana (MN), ITALY  
T +39 0376 771513 F +39 0376 772235  
sales@nexoluce.com www.nexoluce.com

Made in Italy