




204001

LINE VETRO

Linear ground-recessed luminaire for outdoor installation, length 1.000mm, anodized extruded aluminium body, tempered safety glass, moulded silicone gaskets, stainless steel housing for recess. 24V remote driver needed, Low power EPISTAR SMD3528 LED. IP67 rating.

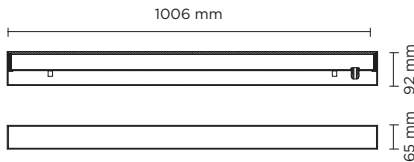

| light source | light beam options | lumen output (lm) | lumin. efficacy (lm/w) |
|--------------------------|--------------------|-------------------|------------------------|
| 3000°K warm-white | | | |
| SMD 3528 LED | 100° | 480 | 40.00 |
| 4000°K warm-white | | | |
| SMD 3528 LED | 100° | 500 | 40.00 |

Finish color options:

Opal Glass

remote driver selection

| brand | manufacturer code | type | watt | IP rate | numbers of fixtures |
|----------|-------------------|-------------------------|------|---------|---------------------|
| Meanwell | LPV-20-24 | constant voltage 24V DC | 20W | IP67 | 1 |
| Meanwell | LPV-35-24 | constant voltage 24V DC | 35W | IP67 | min 1 - max 2 |
| Meanwell | LPV-60-24 | constant voltage 24V DC | 60W | IP67 | min 1 - max 4 |
| Meanwell | LPV-100-24 | constant voltage 24V DC | 100W | IP67 | min 1 - max 7 |

Technical features



Technical data

| | |
|--------------------------|--|
| Wattage | 12 WATT |
| IP Rating | IP67 |
| IK Rating | IK09 |
| Material | High corrosion resistance extruded copper-free aluminum body |
| Coating | Polyester powder coating with phosphocromating pre-finish |
| Light source | EPISTAR SMD3528 LED |
| Screws | Stainless steel |
| Housing | Stainless steel for recess included |
| Driver | 24V DC Remote driver needed |
| Static weight resistance | Max 3000 Kg |
| Glass | Tempered |
| Power cable | 1 mt. neoprene power cable included. |
| Gross weight | 5,00 Kg |

