NAPOLI READER 7580

SKU 1185003



PRODUCT SPECIFICATION

GENERAL

FINISH: Matt Nickel MAIN MATERIAL: Metal - Mild Steel

DIMENSIONS: H: 257mm W: 285mm D: 160mm

INSTALLATION ORIENTATION: Wall Mount - Vertical **CUT OUT HOLE:** Not Applicable **RECESS DEPTH:** Not Applicable FIRE RATING: Not Applicable

CABLE LENGTH: Not Applicable **GROSS WEIGHT:** 0.95 (kg) CLASS: CE (Class I) IP RATING: IP20 **BATHROOM ZONE:** Zone 3 **VOLTAGE:** Mains 230v

Suitable for mounting on flammable materials PRODUCT F MARK:

MAIN LAMP

LIGHT SOURCE: E27/ES MAXIMUM WATTAGE: 60W Max MAXIMUM LAMP LENGTH: 115 LAMP INCLUDED? Nο

LUMINOUS FLUX: Lamp Dependant **COLOUR TEMP:** Lamp Dependant CRI: Lamp Dependant R9: Lamp Dependant MACADAM ELIPSE: Not Applicable UGR: Not Applicable **BEAM ANGLE:**

Not Applicable AVERAGE LIFESPAN: Lamp Dependant L70: Not Applicable

ADDITIONAL LAMP

LIGHT SOURCE: High Power LED MACADAM ELIPSE: 3-Step

MAXIMUM WATTAGE: 3W UGR: Not Applicable LAMP INCLUDED? Yes (Integral) **BEAM ANGLE:** To Be Advised **LUMINOUS FLUX:** To Be Advised TILT ADJUSTMENT ANGLE: 90 (Degrees) **COLOUR TEMP:** 2700 (K) ROTATION ADJUSTMENT ANGLE: 180 (Degrees) AVERAGE LIFESPAN: CRI: 80 To Be Advised

R9: To Be Advised

Not Applicable


ELECTRICAL


SWITCHED: Yes DRIVER/BALLAST VOLTAGE: Not Applicable DIMMABLE: DRIVER AVERAGE LIFESPAN: Not Applicable No DIMMING METHOD: Not Applicable MAIN LAMP EFFICACY: Lamp Dependant DRIVER OUTPUT CURRENT: Not Applicable ADDITIONAL LAMP EFFICACY: To Be Advised DRIVER OUTPUT VOLTAGE: DRIVER/BALLAST INCLUDED? Not Applicable Not Applicable

L70:

SUPPLY FREQUENCY:

To Be Advised

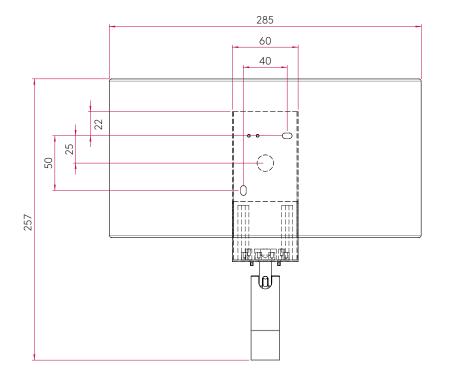

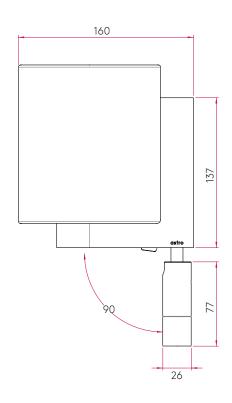

ADDITIONAL INFORMATION



BOX QUANTITY X12

Astro Lighting Ltd. G2 River Way, Harlow, CM20 2DP, Great Britain

T: +44 (0) 1279 427001

F: +44 (0) 1279 427002

sales@astrolighting.co.uk

www.astrolighting.co.uk

 ϵ