BORGO 55 LED **0970**

astro

SKU 1212001



PRODUCT SPECIFICATION

GENERAL

FINISH: White CABLE LENGTH: 1000mm MAIN MATERIAL: Metal - Stainless Steel **GROSS WEIGHT:** 0.52 (Kg) H:170mm W: 55mm D: 44mm **DIMENSIONS:** CE (Class III) CLASS: INSTALLATION ORIENTATION: Wall Mount - Vertical IP RATING: IP20

CUT OUT HOLE: L: 160mm W: 48mm BATHROOM ZONE: Zone 3

RECESS DEPTH: 42mm VOLTAGE: Constant Current 700 (mA)

FIRE RATING: Not Applicable PRODUCT F MARK: Suitable for mounting on flammable materials

LAMP

LIGHT SOURCE:High Power LEDMACADAM ELLIPSE:3-StepMAXIMUM WATTAGE:2WUGR:To Be Ac

To Be Advised MAXIMUM LAMP LENGTH: Not Applicable **BEAM ANGLE:** Not Applicable LAMP INCLUDED? Yes (Integral) TILT ADJUSTMENT ANGLE: Not Applicable **LUMINOUS FLUX:** 38.8 (lm) **ROTATION ADJUSTMENT ANGLE:** Not Applicable **COLOUR TEMP:** AVERAGE LIFESPAN: 3000 (K) 60,000 (Hrs) CRI: 80 L70: To Be Advised

R9: 24.1

ELECTRICAL

SWITCHED: SUPPLY FREQUENCY: No Not Applicable DIMMABLE: Yes DRIVER/BALLAST VOLTAGE: Not Applicable DIMMING METHOD: Control Gear Dependant DRIVER AVERAGE LIFESPAN: Not Applicable **DRIVER OUTPUT CURRENT:** Not Applicable **EFFICACY:** 9.95 (lm/W)

DRIVER OUTPUT VOLTAGE: Not Applicable DRIVER/BALLAST INCLUDED? Not applicable


ADDITIONAL INFORMATION





BOX QUANTITY X16


CE





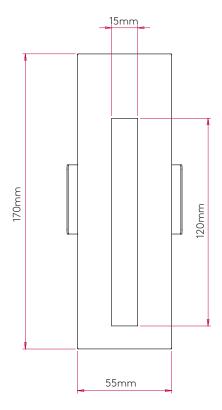

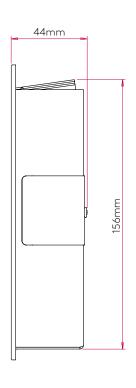

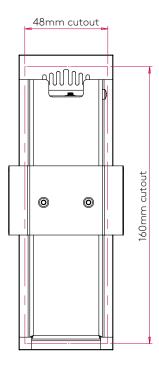

T: +44 (0) 1279 427001 F: +44 (0) 1279 427002 sales@astrolighting.com www.astrolighting.com