APRILIA SQUARE FIRE RATED **5726** SKU 1256014

astro



PRODUCT SPECIFICATION

GENERAL

FINISH: Matt White CABLE LENGTH: Not Applicable

MAIN MATERIAL: Metal - Mild Steel GROSS WEIGHT: 0.625 (Kg)

DIMENSIONS: H:105mm W:105mm D: 97mm **CLASS:** CE (Class III)

INSTALLATION ORIENTATION:Ceiling MountIP RATING:IP20CUT OUT HOLE:92mm/3-5/8"BATHROOM ZONE:Zone 3

RECESS DEPTH: 150 (mm) VOLTAGE: Constant Current 350 (mA)

FIRE RATING: 90 min PRODUCT F MARK: Not suitable for covering with thermal insulation

LAMP

LIGHT SOURCE: COB LED MACADAM ELIPSE: 3-Step MAXIMUM WATTAGE: 6.1W UGR: To Be Advised MAXIMUM LAMP LENGTH: Not Applicable **BEAM ANGLE:** 36.1 (Degrees) LAMP INCLUDED? Yes (Integral) TILT ADJUSTMENT ANGLE: 15 (Degrees)

 LUMINOUS FLUX:
 604.8 (lm)
 ROTATION ADJUSTMENT ANGLE:
 360 (Degrees)

 COLOUR TEMP:
 2700 (K)
 AVERAGE LIFESPAN:
 36,300 (Hrs)

 CRI:
 80
 L70:
 To Be Advised

R9: 8.0

ELECTRICAL

SWITCHED:NoSUPPLY FREQUENCY:Not ApplicableDIMMABLE:YesDRIVER/BALLAST VOLTAGE:Not ApplicableDIMMING METHOD:Control Gear DependantDRIVER AVERAGE LIFESPAN:Not Applicable

DIMMING METHOD: Control Gear Dependant DRIVER AVERAGE LIFESPAN: Not Applicable

DRIVER OUTPUT CURRENT: Not Applicable EFFICACY: 97.55 (Im/W)


DRIVER OUTPUT VOLTAGE: Not Applicable DRIVER/BALLAST INCLUDED? No


ADDITIONAL INFORMATION

BOX QUANTITY x 12

Œ



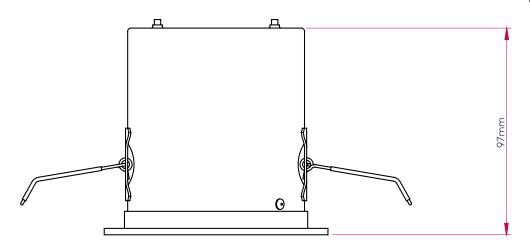

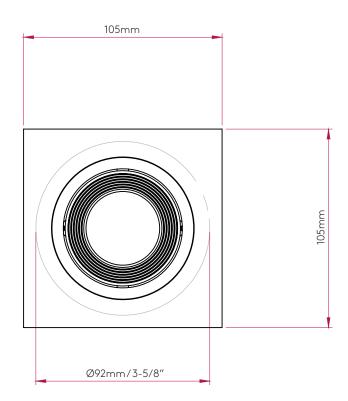

T: +44 (0) 1279 427001 sales@astrolighting.com www.astrolighting.com