



## ML 220V



Un punto di vista puntuale, in grado di enfatizzare particolari e spazi esclusivi: ML 220V, apparecchio illuminante da interni per installazione su binario 220V, è caratterizzato da un connubio di precisione e forza. Il proiettore professionale, dalle alte prestazioni, completamente orientabile a 360°, è studiato per avere il minimo impatto visivo.

*A punctual point of view able to emphasize details and exclusive spaces: ML 220V, installable on 220V rail, is characterized by a combination of precision and strength. The professional projector, capable of high performances, is designed for having a minimal visual impact and is provided with an adjustable arm which can be inclined up to 360°.*

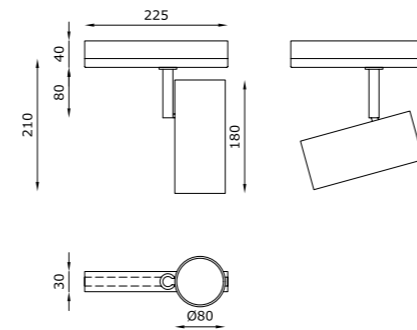

## CODE COMPOSITION

T220 L 00009		0
<i>dimmiability</i>		
<b>ND</b>	non dimmable	
<b>DA</b>	DALI	
<i>light colour</i>		
<b>27</b>	2700K	
<b>30</b>	3000K	
<b>40</b>	4000K	
<i>lens</i>		
<b>24</b>	24°	
<b>38</b>	38°	
<i>finishing</i>		
<b>W1</b>	white	
<b>B1</b>	black	

example of code composition T220 L 00009 **W1 24 27 ND 0**

## TECHNICAL FEATURES

<b>Code</b>	<b>T220 L 00009 XX</b>
<b>Type</b>	Projector ± 360° / ± 90° 
<b>Material</b>	Aluminum
<b>Finishing</b>	White   Black
<b>Weight</b>	1 Kg
<b>Mounting</b>	Track 220V
<b>IP rating</b>	IP40
<b>Insulation class</b>	III
<b>Control gear</b>	Electronic driver on board (included)
<b>Lamp type</b>	LED 
<b>Lamp wattage</b>	1 x 26W
<b>Luminous efficacy</b>	3300 lm - 3000K
<b>Light distribution</b>	Beam 24° Beam 38° (on request)
<b>Fitting</b>	-
<b>Light colour</b>	White 3000K White 2700K   4000K (on request)
<b>Voltage connection</b>	220-240V · 50/60Hz
<b>CRI</b>	>90
<b>Emergency</b>	-
<b>Note</b>	A new breakthrough in luminaire design. Track adapter with built-in LED driver. Driver concealed into track.