

## **PIPEDINO OPEN**

CE F Pr on o








Pipedino Open è una lampada a parete da interni a biemissione in AirCoral® che genera una luce concreta, una guida omogenea attraverso le pareti. Una distribuzione luminosa diffusa, simmetrica e regolare; una luce diretta e indiretta. Le pareti, il soffitto, i complementi d'arredo vengono valorizzati in ogni dettaglio, grazie a una luce che regala qualità visiva.

Pipedino Open is an indoor bi-emission wall lamp made of AirCoral® that emanates a concrete light, a uniform guide throughout walls. A diffused light distribution, symmetrical and regular; a direct and indirect light. Walls, ceilings and furniture all get to be enhanced in detail, thanks to a light that





## TECHNICAL FEATURES

Code	2921.AC	2922.AC	2924.EB.AC	2926.AC
Туре	Wall lamp	Wall lamp	Wall lamp	Wall lamp
	×	$\times$	×	×
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	5.09 m <sup>2</sup>	5.09 m <sup>2</sup>	$5.09 \text{ m}^2$	5.09 m <sup>2</sup>
Mounting	Wall mounting	Wall mounting	Wall mounting	Wall mounting
IP rating	IP20	IP20	IP20	IP20
Insulation class			1	1
Control gear		-	Electronic ballast	Dimmable constant current driver
Lamp type	A 60	QT-DE12 (75 mm)	TC-DEL □∰	LED 350 mA ≒∐Þ
Lamp wattage	1 x 100W max	1 x 150W max	1 x 26W	2 x 6.5W
Luminous efficacy	-	-	-	2 x 810 lm - 3000K
Light distribution	-	-	-	Wide beam 120°
Fitting	E27	R7s	G24q-3	-
Light colour	-	-	-	White 3000K White 2700K   4000K (on request)
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V - 50/60Hz	220-240V · 50/60Hz
CRI		-	-	>90
Emergency	-	-		-
Energy efficiency class	A <sup>+</sup>	A	А	A+
Note	-	-	-	Trailing-edge and leading-edge dimming (20 - 100%).
				Satin glass included.

## OPTIONAL ACCESSORIES

product code optional code description 2924.EB.AC 2920 Glass safety screen Protection IP40 Pipedino Open

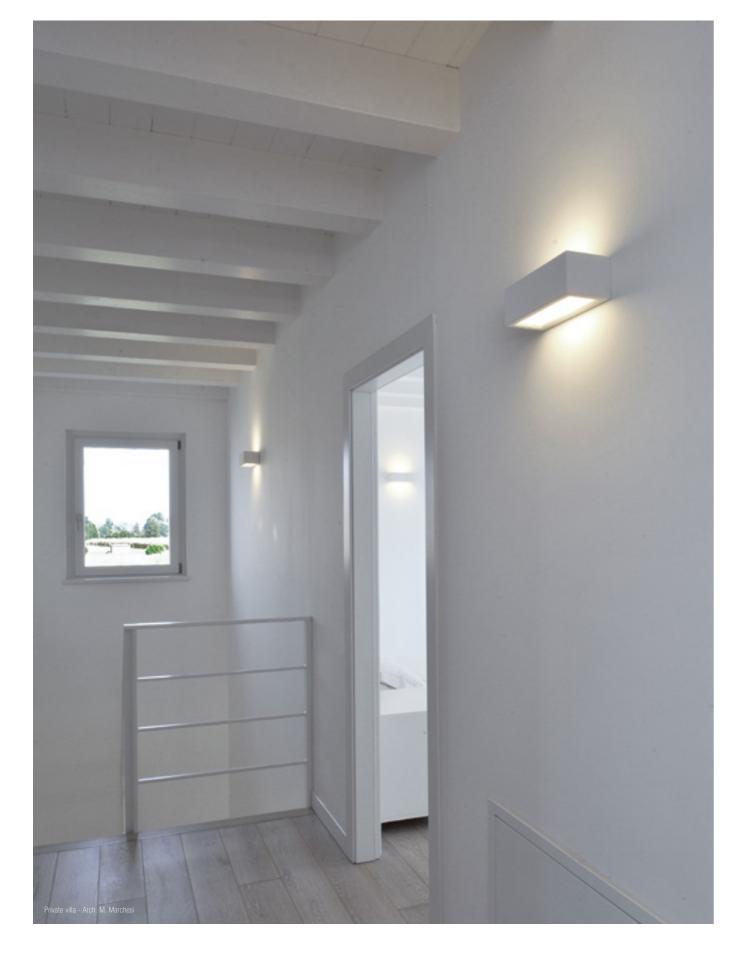

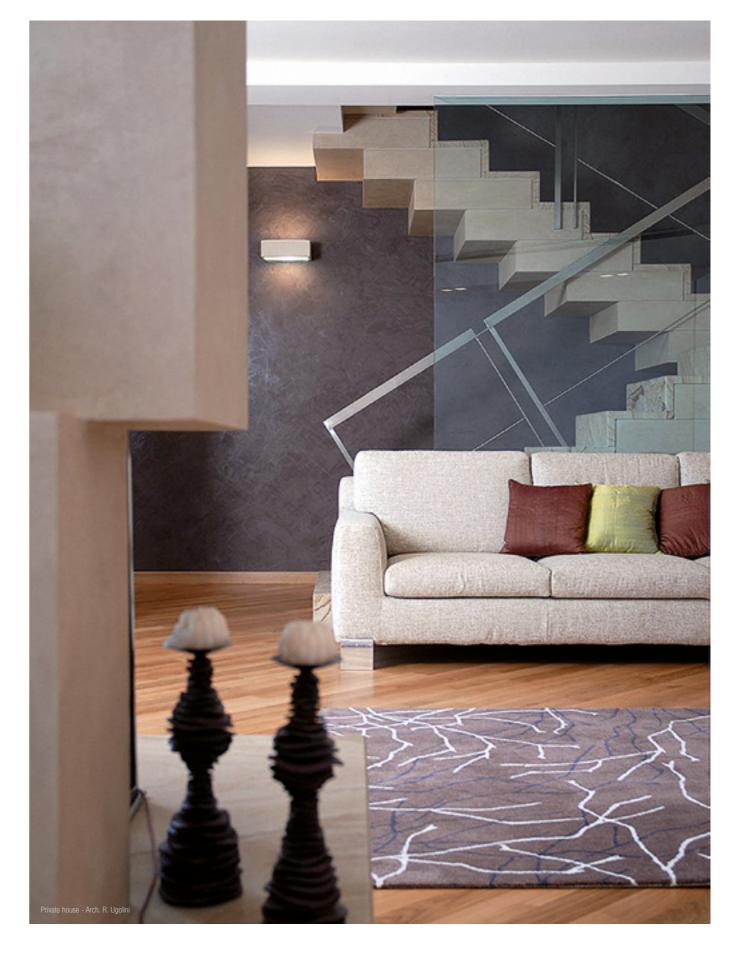

312 | No. and the state of the