

PANZERI

Lola

220-240V AC dimmable (phase cut)

P12017.020.2504



bronze



Data sheet


| | |
|----------------------------|-----------------------|
| CODE | P12017.020.2504 |
| SYSTEM POWER CONSUMPTION | 9W |
| EFFICACY | 108lm/W |
| LIGHT SOURCE | LED |
| LIGHT SOURCE LIFETIME | L80 (B10) 50.000h |
| COLOUR TEMPERATURE | 3000K Ra>90 |
| LIGHT DISTRIBUTION | adjustable |
| BEAM ANGLE | 30° |
| POWER SUPPLY | 220-240V AC |
| FREQUENCY | 50/60Hz |
| ELECTRICAL CONFIGURATION | dimmable (phase cut) |
| DRIVER | integrated included |
| NOMINAL LUMINOUS FLUX | 1170lm |
| LUMEN OUTPUT | 972lm |
| EFFICIENCY | 83.1% |
| GLARE RATING | UGR < 11 |
| WEIGHT | 0.60 Kg |
| PROTECTION DEGREE | IP20 |
| GLOW WIRE TEST PERFORMANCE | 850° |
| PACKING DIMENSIONS | 12,0 x 29,5 x 11,0 cm |



Ceiling or wall lighting fixture for interiors, with swivelling light beam.
 Ceiling/wall plate in die-cast aluminium with polyacrylic paint.
 Electrical connection housing in die-cast aluminium with polyacrylic paint.
 Die-cast aluminium joint with polyacrylic paint.
 Die-cast aluminium structure rotating on two axes in white, black, bronze, mat brass or titanium polyacrylic paint.
 Reflector in thermoplastic material with chrome plated finish.



Technical drawing

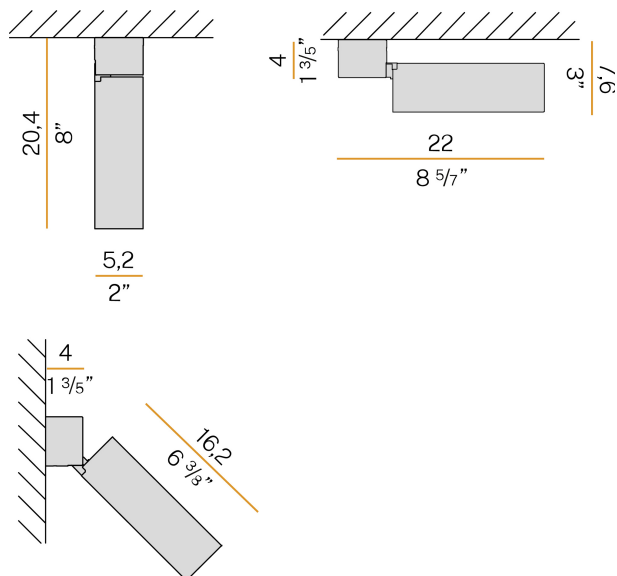

Application



Polar diagram

