

NIMBUS




INCASSO CON VETRO RETROCESSO,
MASSIMA INVISIBILITÀ.

Apparecchio da interni a scomparsa totale in AirCoral® per installazione in soffitto di cartongesso o laterizio, Nimbus è pensato per diventare parte integrante del soffitto e scomparire completamente alla vista una volta installato. Il vetro satinato diffonde la luce nell'ambiente, così da valorizzarne gli spazi, trasformandoli ogni volta in uno spettacolo da scoprire, determinando precisi percorsi di luce caratterizzati da uno stile esclusivo che parla la lingua del design.

RECESSED FITTING WITH REAR GLASS,
MAXIMUM INVISIBILITY.

A recessed indoor system made of AirCoral® for plasterboard or brick ceilings designed to become an integral part of the ceiling, Nimbus is completely disappearing from the view once installed. Its satined glass diffuses light in the environment, enhancing the spaces, transforming them in a sight to rediscover every time, defining precise light paths with a distinctive style that speaks the language of design.

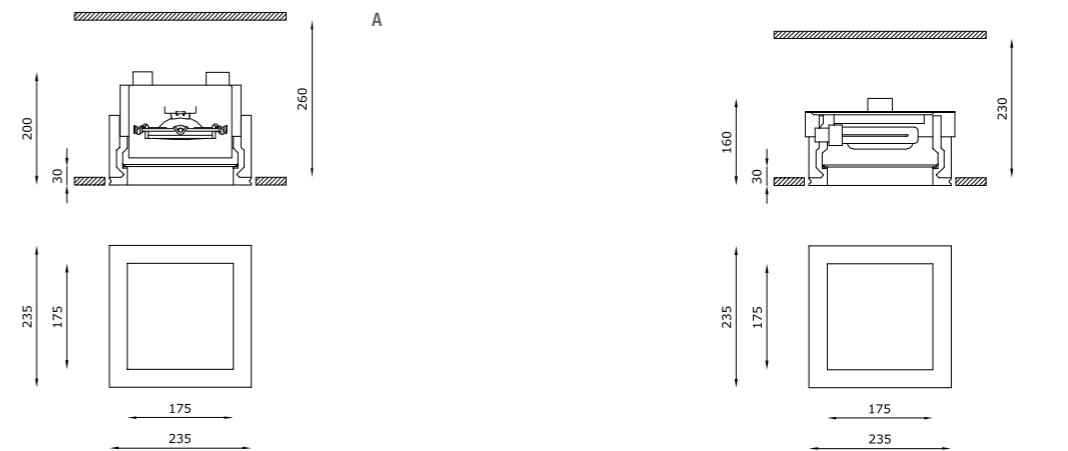

TECHNICAL FEATURES

Code	6271.AC (fig. A)	6276.AC (fig. B)	6285.AC (fig. B)	6281.AC (fig. B)	6283.AC (fig. B)
Type	Tiltable downlight ± 30° 	Downlight 90° 	Downlight 90° 	Downlight 90° 	Downlight 90°
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	6.82 m²	6.82 m²	6.82 m²	6.82 m²	6.82 m²
Weight	4.1 Kg	3.8 Kg	4.1 Kg	3 Kg	3 Kg
Mounting	Ceiling recessed	Ceiling recessed	Ceiling recessed	Ceiling recessed	Ceiling recessed
IP rating	IP40	IP40	IP40	IP40	IP40
Insulation class	III	I	I	I	I
Control gear	Dimmable electronic transformer	Electronic ballast	Electronic ballast	Constant current electronic driver	Dimmable constant current driver
Cut out for plasterboard	245 x 245 mm	245 x 245 mm	245 x 245 mm	245 x 245 mm	245 x 245 mm
Lamp type	QR 111 	TC-TEL 	TC-TEL 	LED 1050 mA 	LED 350 mA
Lamp wattage	1 x 100W max	2 x 26/32W	2 x 26W	1 x 40W	2 x 6.5W
Luminous efficacy	-	-	-	4680 lm - 3000K	2 x 810 lm - 3000K
Light distribution	-	-	-	Wide beam 40°	Wide beam 120°
Fitting	G53	Gx24q-3	Gx24q-3	-	-
Light colour	-	-	-	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)
Light hole	175 x 175 mm	175 x 175 mm	175 x 175 mm	175 x 175 mm	175 x 175 mm
Voltage connection	220-240V / 12V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	-	-	-	>90	>90
Emergency	-	-	1 hour	-	-
Energy efficiency class	A	A	A	A++	A+
Note	Extra white satin glass with transparent central part Ø 110 mm. Frosted glass recessed 30 mm into the ceiling.	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling.	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling.	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling.	Extra white satin glass. Frosted glass recessed 30 mm into the ceiling. Trailing-edge and leading-edge dimming (20 - 100%).

OPTIONAL ACCESSORIES

product code	optional code	description	info
6271.AC	00010KIT	Kit LED dimmable	Bulb 10W · 12V
6276.AC	BR6276LT	Brick box	Dimensions L: 445 mm; W: 250 mm; D: 180 mm (instructions on page 502)
6283.AC	BR6283LT	Brick box	Dimensions L: 445 mm; W: 250 mm; D: 180 mm (instructions on page 502)

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2,7 m in height and therefore expressed in m²



Private villa - ph. G. Doppiu - Olbia