

S1G




matt black

PROIETTORE A PICCHETTO IP65 MULTI DIREZIONALE.

S1G è un proiettore per ambienti esterni adatto per installazioni direttamente nel terreno, grazie ad un picchetto e ad una piastra nella parte terminale. Con un'estensione massima di 80 cm il proiettore può essere installato a qualsiasi altezza. Orientabile a 360°, è perfetto per valorizzare essenze o percorsi all'interno di spazi verdi.

IP65 MULTI-DIRECTIONAL STAKE PROJECTOR.

S1G is an outdoor projector that can be installed directly in the ground thanks to a stake and a plate at the end. With a maximum extension of 80 cm the projector can be installed at any height. Adjustable at 360°, it is perfect to enhance essences or paths in green areas.

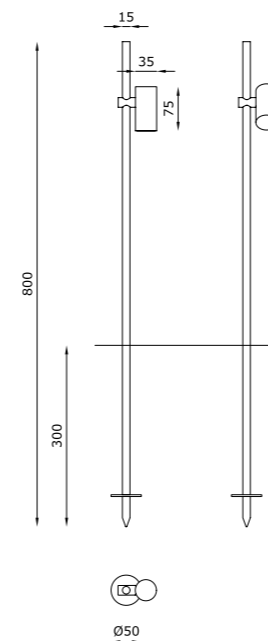

CODE COMPOSITION

2082 BL 4 S _ E _ WD

light colour

27 2700K

30 3000K

lens

22 22°

50 50°

example of code composition

2082 BL 4 S 22 E 30 WD

TECHNICAL FEATURES

Code	2082 XX
Type	Projector ± 360°
Material	Aluminum
Finishing	Black
Weight	-
Mounting	Ground lamp
IP rating	IP65
Insulation class	III
Control gear	Constant current electronic driver (not included)
Lamp type	LED 500 mA Vf: 11 VDC
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light colour	White 3000K White 2700K (on request)
Voltage connection	By driver (optional)
CRI	>90
Emergency	-
Note	Watertight connection device: useful to block the penetration of humidit caused by the phenomenon of the backwash of the depression created in the lighting fixtures during the cooling process of the lamp.

OPTIONAL ACCESSORIES

product code	optional code	description	info
2082 XX	H8500.E	Constant current electronic driver. Remote installation	Suitable for n°3 code 2082 XX - 500 mA



S1G
SUPERFUTUREDESIGN*