

# THE DARK



matt black


## SCHERMO FUMÈ PER UN LOOK TOTAL BLACK QUANDO È SPENTO.

The Dark è una lampada a sospensione lineare per ambienti interni. Il suo design ne enfatizza il nome proponendosi per essere un punto luce **completamente nero grazie alla presenza di uno schermo fumè**, che mette in evidenza la sua capacità luminosa solo quando è acceso. Disponibile anche con schermo satinato. È una lampada dalla forma essenziale e minimale che crea una luce diffusa e omogenea nello spazio. È disponibile una versione con driver incluso nel rosone e una versione con rosone a scomparsa in battuta con driver remoto.


## FUMÈ SHADE FOR A TOTAL BLACK LOOK WHEN TURNED OFF.

The Dark is a linear pendant light for interiors. Its design epitomises its name proposing itself as a **completely black light point thanks to a smoked shade** which shows off its light capacity only when it is switched on. Also available with satin-finished shade. It is a light with a clean-cut minimal shape which creates a diffused and homogeneous light in the space. It is available in a version with driver included in the ceiling-rose and a version with recessed ceiling-rose with remote driver.

## Indoor Suspended stand alone

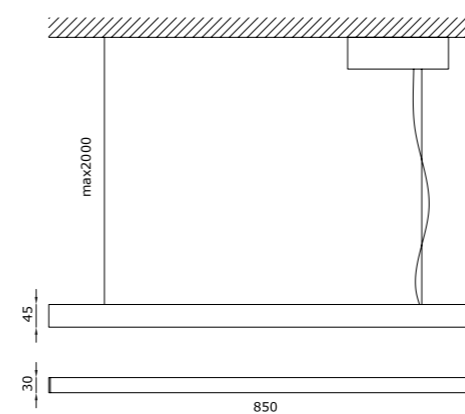

A

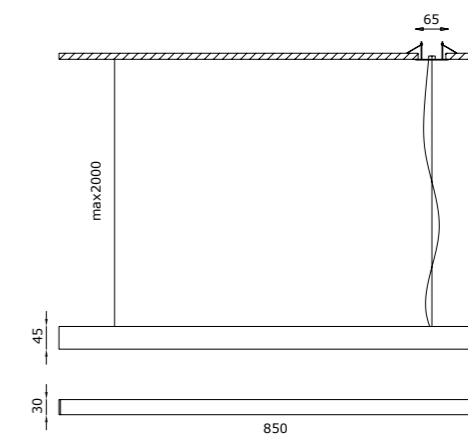

B

### CODE COMPOSITION

1140 BL 4 S 00 E \_ ND

light colour

27	2700K
30	3000K
40	4000K

1141 BL 4 S 00 E \_ ND

light colour

27	2700K
30	3000K
40	4000K

example of code composition 1140 BL 4 S 00 E 30 ND

### TECHNICAL FEATURES

Code	1140 XX (fig. A)	1141 XX (fig. B)
Type	Suspension lamp	Suspension lamp
Material	Aluminum	Aluminum
Finishing	Black	Black
Weight	2 Kg	2 Kg
Mounting	Ceiling mounting	Ceiling mounting
IP rating	IP40	IP40
Insulation class	III	III
Control gear	Constant voltage LED driver on board (included)	Constant voltage LED driver, remote installation (included)
Cut out for plasterboard	-	Ø 55 mm
Lamp type	LED	LED
Lamp wattage	1 x 25W	1 x 25W
Luminous efficacy	1800 lm	1800 lm
Light distribution	Opal diffused screen fumè	Opal diffused screen fumè
Fitting	-	-
Light colour	White 3000K White 2700K   4000K (on request)	White 3000K White 2700K   4000K (on request)
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	-
Note	Black ceiling box with driver on board.  Black silicone cable (L max 2 m).	Black recessed canopy with remote driver.  Black silicone cable (L max 2 m).

### OPTIONAL ACCESSORIES

product code	optional code	description	info
1140 XX / 1141 XX	VTR0000019	Opal white diffused screen	-



The Dark  
SUPERFUTUREDESIGN\*