

PANZERI

Silver Ring

220-240V AC dimmable (DALI/Push DIM)

P08221.050.0402

 gold leaf

DIRECT
LIGHT

Data sheet


CODE	P08221.050.0402
SYSTEM POWER CONSUMPTION	25W
EFFICACY	72.36lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (DALI/Push DIM)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	3100lm
LUMEN OUTPUT	1809lm
EFFICIENCY	58.4%
WEIGHT	4.90 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	58,0 x 14,0 x 58,0 cm



Ceiling or wall lighting fixture for interiors, with direct light emission.
Pickled sheet metal ceiling/wall bracket in polyacrylic paint.
Pickled sheet metal structure in polyacrylic paint.
Aluminium dissipation plates.
Pickled sheet metal covers in white, black or bronze polyacrylic paint, or with gold leaf coating.
Modelled polycarbonate diffuser with opaline finish.



Technical drawing

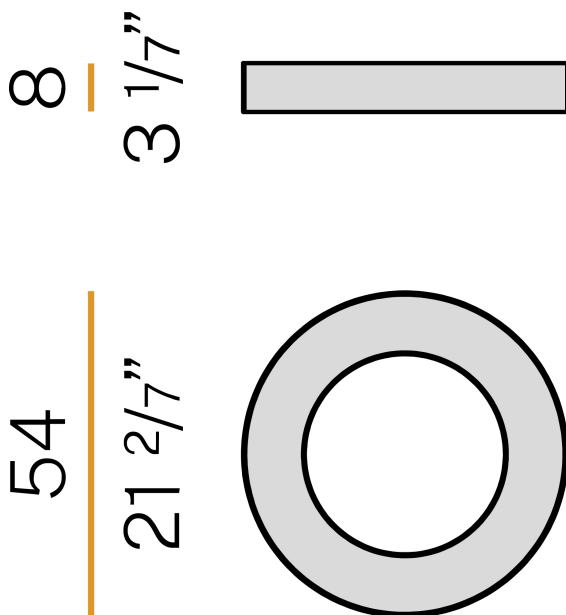

Application



Polar diagram

