


## FROG

Uplights

design Roberto Mantovani



Recessed 24VDC IP67 ground luminaires of the utmost build quality, the extremely small dimensions are paired with a high luminous flux. With a body in thick anodised aluminium, it comes in versions with the front in walkable AISI316L stainless steel and in anodised and powder-coated walkable aluminium. Extra-clear tempered glass, ATEX cable gland and neoprene cable. Can be fitted with an anti-glare filter for maximum visual comfort.

Incassi a terra IP67 a 24VDC di altissima qualità costruttiva, con dimensioni estremamente contenute ed elevati flussi luminosi. Corpo in alluminio anodizzato a spessore, versioni con frontale in acciaio INOX AISI316L carrabili, in alluminio anodizzato e verniciato a polveri calpestabili. Vetro extrachiaro temprato, pressacavo ATEX, cavo in neoprene. Equipaggiabili con filtro antiabbagliamento per il massimo comfort visivo.

Appareils encastrables de sol IP67 de très haute qualité d'exécution, de dimensions extrêmement limitées et à flux lumineux élevés. Corps en aluminium anodisé épais, versions avec façade en acier INOX AISI316L adaptés au passage de véhicules et en aluminium anodisé et revêtu de peinture en poudre. Verre extra-clair trempé, presse-étoupe ATEX, câble en néoprène. Peut être équipé de filtre anti-éblouissement pour le plus grand confort visuel.

IP67 24VDC Bodeneinbauleuchten von sehr hoher konstruktiver Qualität, mit extrem kleinen Abmessungen und hohen Lichtströmen. Gehäuse aus dickem eloxiertem Aluminium, Versionen mit begehbarer Frontplatte aus Edelstahl AISI316L, aus eloxiertem und pulverbeschichtetem Aluminium. Extra klares, gehärtetes Glas, ATEX-Kabelverschraubung, Neoprenkabel. Kann mit Blendschutzfilter für maximalen Sehkomfort ausgestattet werden.

IP67 made in Italy




Supply current  
24 VDC


Power  
2 W

Parallel wiring

Dimensions




Photometric diagrams

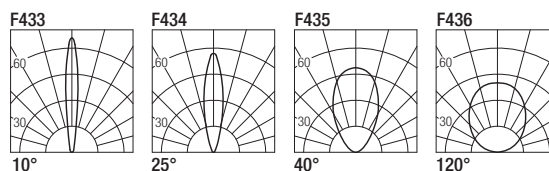

CCT/CRI/Flux

2700K	128lm
3000K	133lm
4200K	154lm


Code construction

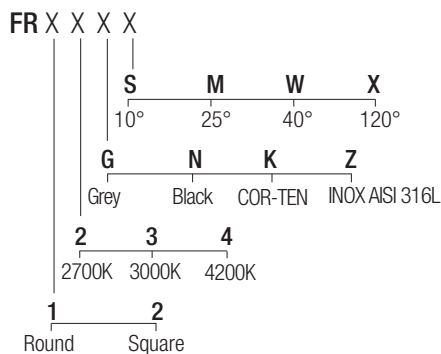

Note: cable cut to measure on request

Optionals

CSXT01  
Recessing box




LFR01  
Low luminance louver



Note: the filter must be ordered together with the lighting fixture

Drivers

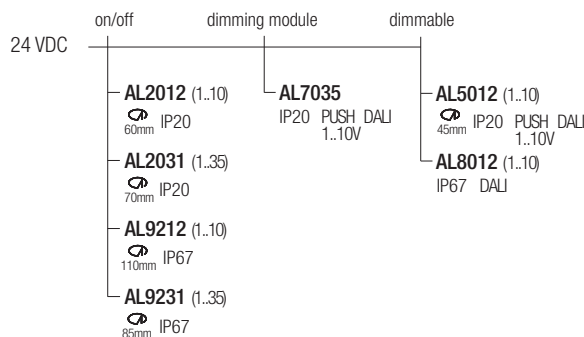

Note: dimming module AL7035 to be used in combination with a 24VDC power supply