


PANZERI

Silver Ring

220-240V AC dimmable (DALI/Push DIM)

P08221.080.0402

 gold leaf

DIRECT
LIGHT


Data sheet

CODE	P08221.080.0402
SYSTEM POWER CONSUMPTION	45W
EFFICACY	67.84lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (DALI/Push DIM)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	6111lm
LUMEN OUTPUT	3053lm
EFFICIENCY	50%
WEIGHT	7,63 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	90,0 x 18,0 x 90,0 cm



Ceiling or wall lighting fixture for interiors, with direct light emission.
Pickled sheet metal ceiling/wall bracket in polyacrylic paint.
Pickled sheet metal structure in polyacrylic paint.
Aluminium dissipation plates.
Pickled sheet metal covers in white, black or bronze polyacrylic paint, or with gold leaf coating.
Modelled polycarbonate diffuser with opaline finish.

Technical drawing

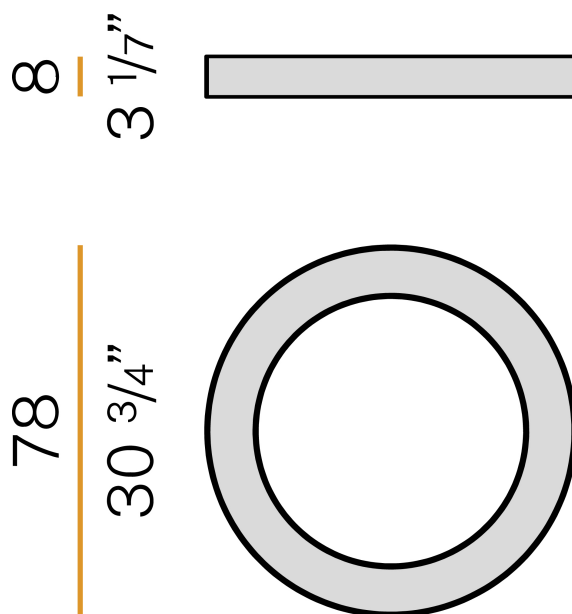

Application



Polar diagram

