

# PANZERI


## One

220-240V AC dimmable (DALI/Push DIM)  
L03717.000.0402




### Data sheet

|                          |                          |
|--------------------------|--------------------------|
| CODE                     | L03717.000.0402          |
| SYSTEM POWER CONSUMPTION | 15W                      |
| EFFICACY                 | 68.13lm/W                |
| LIGHT SOURCE             | LED                      |
| LIGHT SOURCE LIFETIME    | L90 (B10) 50.000h        |
| COLOUR TEMPERATURE       | 3000K Ra>90              |
| LIGHT DISTRIBUTION       | diffused                 |
| POWER SUPPLY             | 220-240V AC              |
| FREQUENCY                | 50/60Hz                  |
| ELECTRICAL CONFIGURATION | dimmable (DALI/Push DIM) |
| DRIVER                   | integrated included      |
| NOMINAL LUMINOUS FLUX    | 1611lm                   |
| LUMEN OUTPUT             | 1022lm                   |
| EFFICIENCY               | 63.4%                    |
| WEIGHT                   | 1,47 Kg                  |
| PROTECTION DEGREE        | IP40                     |
| COLOUR TOLLERANCES       | SDCM 3                   |
| PACKING DIMENSIONS       | 18,0 x 46,0 x 20,0 cm    |

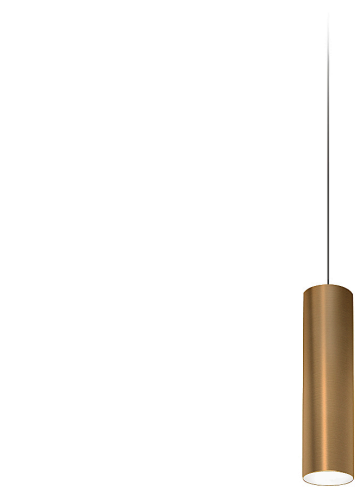

Suspension lighting fixture for interiors, with direct light emission.  
Extruded aluminium structure in white, black, bronze or mat brass polyacrylic paint, or with gold leaf coating.  
Turned pickled sheet metal end cap in white, black, bronze, mat brass or gold polyacrylic paint.  
Aluminium dissipation plate.  
Flat frosted glass diffuser.  
Turned pickled sheet metal frame in white, black, bronze or mat brass polyacrylic paint, or with gold leaf coating.  
2m (78,7") long suspension and power cable in transparent PVC.  
Power canopy with galvanized sheet metal ceiling bracket and pickled sheet metal covering in white, black, bronze or mat brass polyacrylic paint, or with gold leaf coating.

### Technical drawing

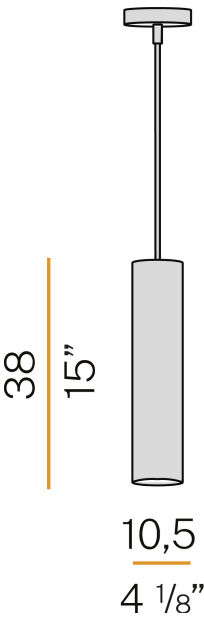

### Polar diagram

