

# PANZERI

## Flat

220-240V AC ON-OFF  
P07501.038.0401

● white



### Data sheet


CODE	P07501.038.0401
SYSTEM POWER CONSUMPTION	24W
EFFICACY	44.7lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 60.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	2732lm
LUMEN OUTPUT	1073lm
EFFICIENCY	39.3%
WEIGHT	3,03 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	16,0 x 46,0 x 46,0 cm



Ceiling or wall lighting fixture for interiors, with direct light emission.  
Pickled sheet metal ceiling/wall bracket in polyacrylic paint.  
Aluminium dissipation plate.  
Pickled sheet metal closing frames in white polyacrylic paint.  
Modelled polycarbonate diffuser with opaline finish.



### Technical drawing

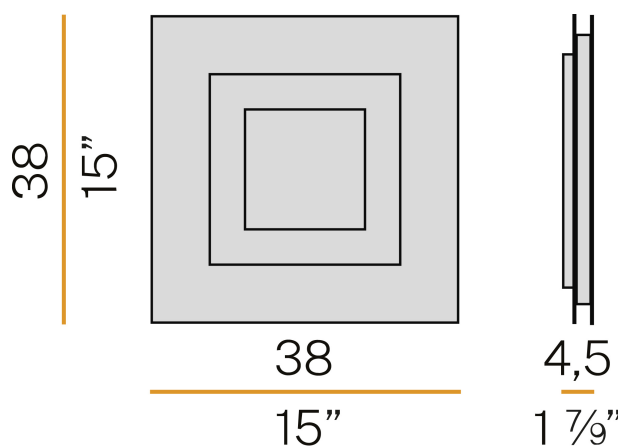

### Application



### Polar diagram

