
### Soho 20

48V DC ON-OFF B75402.026.2516


#### Data sheet

| CODE                       | B75402.026.2516      |
|----------------------------|----------------------|
| SYSTEM POWER CONSUMPTION   | 26W                  |
| EFFICACY                   | 72.69lm/W            |
| LIGHT SOURCE               | LED                  |
| LIGHT SOURCE LIFETIME      | L80 (B10) 50.000h    |
| COLOUR TEMPERATURE         | 3000K Ra>90          |
| LIGHT DISTRIBUTION         | adjustable           |
| BEAM ANGLE                 | 30°                  |
| POWER SUPPLY               | 48V DC               |
| ELECTRICAL CONFIGURATION   | ON-OFF               |
| DRIVER                     | integrated included  |
| NOMINAL LUMINOUS FLUX      | 2700lm               |
| LUMEN OUTPUT               | 1890lm               |
| EFFICIENCY                 | 70%                  |
| GLARE RATING               | UGR < 16             |
| WEIGHT                     | 0,40 Kg              |
| PROTECTION DEGREE          | IP20                 |
| GLOW WIRE TEST PERFORMANCE | 850°                 |
| PACKING DIMENSIONS         | 17,5 x 29,8 x 7,9 cm |

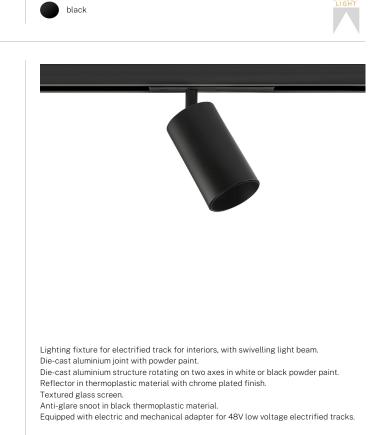

# CEERI 🗵 🐵


#### Technical drawing



#### Application



#### Polar diagram



cd/klm \_\_\_\_\_\_C0 - C180 - - - C90 - C270

## Soho 20

Accessories / diffusion

| XMR12<br>CCEHI | Internal satin gold cylinder. |                |
|----------------|-------------------------------|----------------|
| XMR5<br>CCEHI  | Spot optic.                   | 23 mm<br>1"    |
| XMR7<br>CEHH   | Wide flood optic.             | 23 mm<br>1 28% |

## Soho 20

#### Accessories / electrified tracks

| хм44502-100<br>С Є ЕНГ <u>×</u> п  | Electrified track for suspended or ceiling installation for interiors. Structure in extruded aluminium<br>with white or black powder paint. 48V DC low voltage power supply. 15A total electrical load.<br>Fastening, joining and closing accessories to be ordered separately. Length: 1m (39,4")                                | 27 mm<br>1"<br>80<br>80<br>80<br>80<br>80<br>10<br>10<br>10<br>10<br>10<br>10<br>10<br>10<br>10<br>10<br>10<br>10<br>10 |
|------------------------------------|---|---|
| хм44502-200<br>С Є ЕНГ. <u>X</u> 🐽 | Electrified track for suspended or ceiling installation for interiors. Structure in extruded aluminium with white or black powder paint. 48V DC low voltage power supply. 15A total electrical load. Fastening, joining and closing accessories to be ordered separately. Length: 2m (78,7")                                      | 27 mm<br>1"<br>89 BB<br>20 -  |
| хм44502-300<br>С Є ЕНІ <u>×</u> п  | Electrified track for suspended or ceiling installation for interiors. Structure in extruded aluminium with white or black powder paint. 48V DC low voltage power supply. 15A total electrical load. Fastening, joining and closing accessories to be ordered separately. Length: 3m (118,1")                                     | 27 mm<br>1"<br>1"<br>1"<br>1"<br>1"   |
| XM44602-100                        | Electrified track for ceiling or wall built-in installation for interiors. Total built-in structure in<br>plasterboard, in extruded aluminium with black powder paint. 48V DC low voltage power supply. 15A<br>total electrical load. Fastening, joining and closing accessories to be ordered separately. Length: 1m<br>(39,4")  | Er min<br>Stor<br>27 min<br>27 min<br>7   |
| хм44602-200<br>ССЕЕНЕ 🗵 🔟          | Electrified track for ceiling or wall built-in installation for interiors. Total built-in structure in<br>plasterboard, in extruded aluminium with black powder paint. 48V DC low voltage power supply. 15A<br>total electrical load. Fastening, joining and closing accessories to be ordered separately. Length: 2m<br>(78,7")  | G7mm<br>2 styr<br>27mm<br>7   |
| хм44602-300<br>С Є ЕНГ. 🕱 🐽        | Electrified track for ceiling or wall built-in installation for interiors. Total built-in structure in<br>plasterboard, in extruded aluminium with black powder paint. 48V DC low voltage power supply. 15A<br>total electrical load. Fastening, joining and closing accessories to be ordered separately. Length: 3m<br>(118,1") | 07 mm<br>2 kV<br>2 200<br>27 mm<br>7  |

### Soho 20

#### Accessories / electrified tracks / power supply

XM445-TR

Electronic transformer, 120W 48V DC, for 48V DC electrified track.




## Soho 20

#### Accessories / electrified tracks / power supply and closing

| хм44502-ADX<br>СЕ ІП 🗵 🐵   | Right live-end for 48V DC suspended or ceiling electrified track. |                   |
|----------------------------|---|-------------------|
| XM44502-ASX<br>CEERE       | Left live-end for 48V DC suspended or ceiling electrified track.  |                   |
| хм44602-ADX<br>С Є ЕНІ 🗵 🐵 | Right live-end for 48V DC recessed electrified track.             | 555 mm<br>2 1/6 . |
| XM44602-ASX<br>CEERE 🗵 🐨   | Left live-end for 48V DC recessed electrified track.              | 555 mm<br>236°    |

## Soho 20

#### Accessories / electrified tracks / power supply and junction

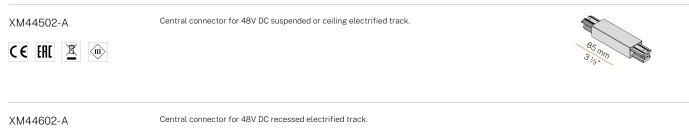

CE ERE 🗵 💮

Panzeri.it - 05/09/2022 - Soho 20 - B75402.026.2516

## Soho 20

### Accessories / electrified tracks / closing

| XM44502-C  | Cover 1000mm (39,4") long for 48V DC electrified track.    |          |
|------------|--|----------|
| CE III 🗵 🐵 |  |          |
|            |  |          |
| ХМ44502-Е  | End cap for 48V DC suspended or ceiling electrified track. |          |
| CEIN X     |  | 27       |
|            |  | 1"<br>1" |
| XM44602-E  | End cap for 48V DC recessed electrified track.             |          |
| CE ERL 🗵 🐵 |  |          |

## Soho 20

### Accessories / electrified tracks / fixing

| хм44502-к<br>Сс ні <u>х</u> Ф  | Ceiling kit for 48V DC electrified track.  |  |
|--------------------------------|--|--|
| хм44502-S<br>Се ЕНГ <u>х</u> т | Suspension kit with 2m (78,7") long steel wire and plate for 48V DC electrified track. |  |
| XM446-P                        | Plate for fixing ceiling pendants for 48V DC recessed electrified track.               |  |
| CE EHL 🗵 ŵ                     |  |  |

## Soho 20

### Accessories / electrified tracks / junction

| XM44502-LE<br>CEERE X             | External "L" joint for 48V DC suspended or ceiling electrified track. |
|-----------------------------------|---|
| XM44502-LI<br>Ceffi               | Internal "L" joint for 48V DC suspended or ceiling electrified track. |
| xm44502-ue<br>C€ [fii] <u>×</u> ⊕ | Straight joint for 48V DC electrified track.                          |
| XM44502-UM                        | Mechanical straight joint for 48V DC electrified track.               |