

LYS





MINIMALISMO E SEMPLICITÀ.

Nel Lys, apparecchio da interni a scomparsa totale per installazione a soffitto di cartongesso o laterizio, la resistenza del Coral® si unisce alla delicatezza del vetro satinato extra white retrocesso 5 mm. Performance e diffusione per una luce unica, un quadrato perfetto che conferisce rinnovato stile alle superfici.

MINIMALISM AND SIMPLICITY.

In Lys, a totally disappearing indoor recessed luminaire, installable on plasterboard or brick walls and ceilings, Coral®'s strength merges with the extra-white 5mm recessed satin glass delicacy of the covering. Performances and distribution for a unique light, a perfect square that lends an improved style to surfaces.

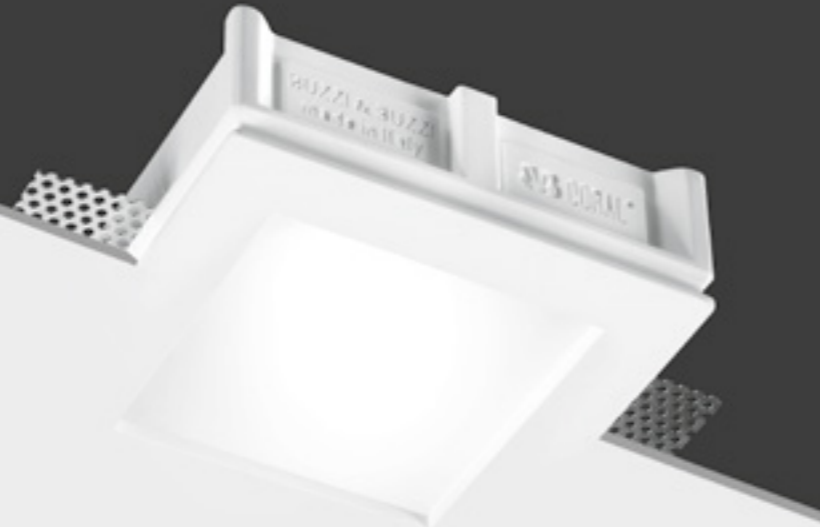

TECHNICAL FEATURES

Code	4426.Z.00	4421.00	4425.00
Type	Downlight 90°	Downlight 90°	Downlight 90°
Material	00: Coral®	00: Coral®	00: Coral®
Weight	0.9 Kg	0.8 Kg	0.85 Kg
Mounting	Ceiling recessed	Ceiling recessed	Ceiling recessed
IP rating	IP40	IP40	IP40
Insulation class	III	III	I
Control gear	Constant current electronic driver (not included)	Electronic transformer (not included)	-
Dimensions	A: 100 mm; B: 130 mm	A: 90 mm; B: 120 mm	A: 100 mm; B: 130 mm
Cut out for plasterboard	155 x 155 mm	155 x 155 mm	155 x 155 mm
Lamp type	LED 500 mA Vf: 18 VDC	QR CB 51	QPAR 16
Lamp wattage	1 x 9W	1 x 50W max	1 x 50W max
Luminous efficacy	1125 lm - 3000K	-	-
Light distribution	Wide beam 40°	-	-
Fitting	-	GU5.3	GU10
Light colour	White 3000K White 2700K 4000K (on request)	-	-
Light hole	100 x 100 mm	100 x 100 mm	100 x 100 mm
Voltage connection	By driver (optional)	By driver (optional)	220-240V - 50/60Hz
CRI	>90	-	-
Emergency	-	-	-
Energy efficiency class	A++	A++	A++
Note	Extra white satin glass. Frosted glass recessed 5 mm into the ceiling. On request available dimmable PUSH or DALI.	Extra white satin glass. Frosted glass recessed 5 mm into the ceiling.	Extra white satin glass. Frosted glass recessed 5 mm into the ceiling.

OPTIONAL ACCESSORIES

product code	optional code	description	info
4426.Z.00	H8500.E	Constant current electronic driver	Suitable for n°2 code 4426.Z.00 - 500 mA
	H8500.B	Constant current electronic driver	Suitable for n°1 code 4426.Z.00 - 500 mA
	BR4426LT	Brick box	Dimensions L: 195 mm; W: 160 mm; D: 160 mm (instructions on page 502)
4421.00	H8060.LED	Dimmable electronic transformer	Max watt 60W Volts - Hz 230/12V - 50/60Hz
	0008KIT	Kit LED dimmable	Bulb 7W - 12V
	BR4421LT	Brick box	Dimensions L: 195 mm; W: 160 mm; D: 160 mm (instructions on page 502)
4425.00	0009KIT	Kit LED dimmable	Bulb 6W - 220-240V
	BR4425LT	Brick box	Dimensions L: 195 mm; W: 160 mm; D: 160 mm (instructions on page 502)



Armani Casa - Maçka Residences - ph. E. Abrate - Istanbul



Armani Casa - Maçka Residences - Istanbul