


PANZERI

Three


220-240V AC ON-OFF
P03919.015.0406

 mat brass

DIRECT
LIGHT


Data sheet

CODE	P03919.015.0406
SYSTEM POWER CONSUMPTION	15W
EFFICACY	63.73lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 50.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	1275lm
LUMEN OUTPUT	956lm
EFFICIENCY	75%
WEIGHT	1,32 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	20,0 x 20,0 x 22,0 cm

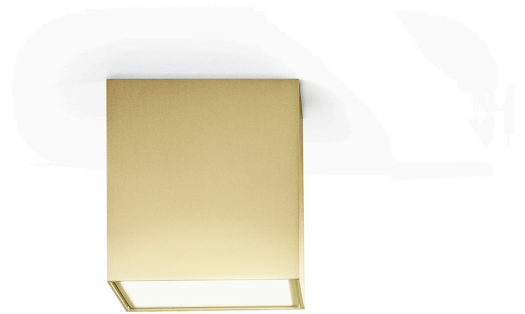

Ceiling or wall lighting fixture for interiors, with direct light emission.
Pickled sheet metal ceiling/wall bracket in polyacrylic paint.
Extruded aluminium structure in white, black, bronze or mat brass polyacrylic paint.
Aluminium dissipation plate.
Flat frosted glass diffuser.
Pickled sheet metal frame in polyacrylic paint.


Technical drawing

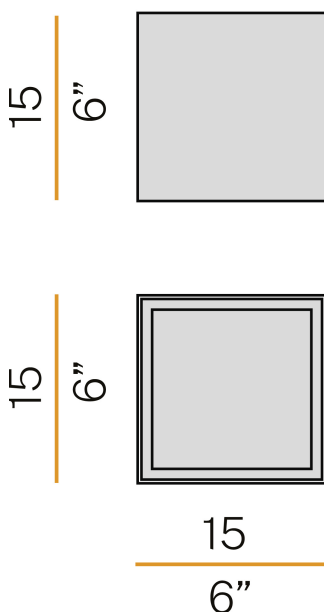

Application



Polar diagram

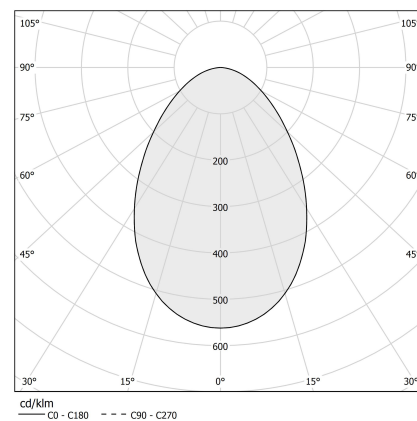

PANZERI

Three

Accessories / dimming

XM14/230

Dimmable device for 230V LED modules, 5=100W.

