### Bella

24V DC

M05201.011.0510





#### Data sheet

CODE	M05201.011.0510
SYSTEM POWER CONSUMPTION	4,5W
EFFICACY	97lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B10) 70.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	460lm
LUMEN OUTPUT	388lm
EFFICIENCY	84.3%
WEIGHT	0,22 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	13,0 x 24,0 x 12,0 cm











Multiple suspension lighting fixture for interiors, with direct light emission.  $\label{eq:decomposition} \mbox{Die-cast aluminium structure in white, black, bronze, mat brass or titanium polyacrylic}$ 

Modelled acrylic diffuser with mat finish.


Aluminium closing disk in polyacrylic paint.


Suspension kit with rod in brass tube in polyacrylic paint.

3m (118,1") long suspension and power cable in transparent PVC.


Provided without power canopy, complete with cable clamp on the cable's free extremity.

#### Technical drawing






#### Polar diagram



#### Bella

#### Accessories / power supply

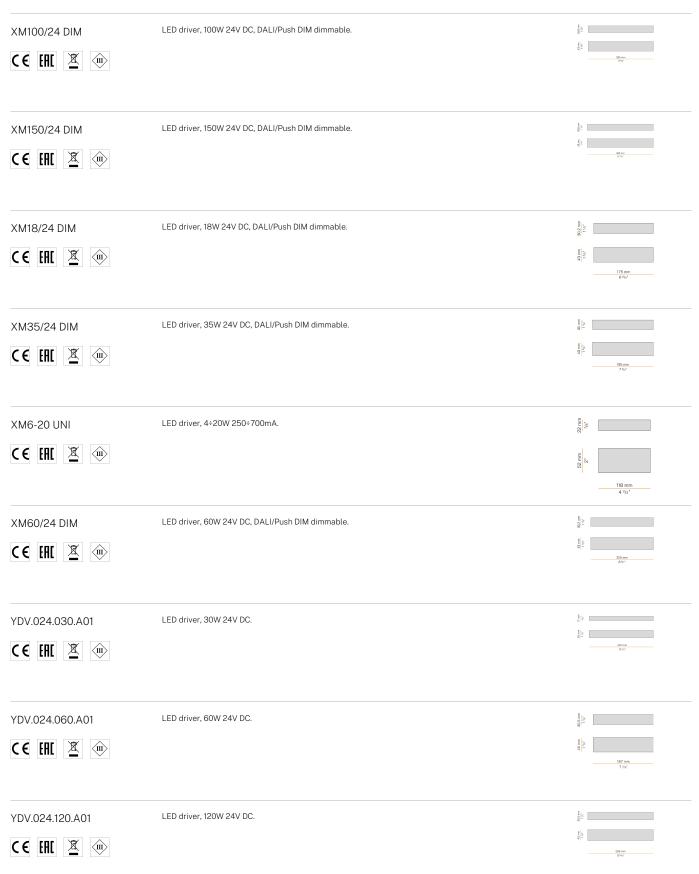

### Bella

#### Accessories / power supply

YDV.024.180.A01

LED driver, 180W 24V DC.





### Bella

#### Accessories / power supply and fixing

XM8901-03 LED	Canopy for power supply and suspension up to 3 24V DC constant voltage models maximum.	3.5. 13/8,*
CE EHI 🗵 🐽		3, 2
		42 16 <sup>5</sup> /9"
		10 49
XM8901-05 LED	Canopy for power supply and suspension up to 5 24V DC constant voltage models maximum.	3.55
CE EHI 🗵 🐽		76 30°
XM8901-06 LED	Canopy for power supply and suspension up to 6 24V DC constant voltage models maximum.	3.55 - 1.35 - 1.55
CE FHI 🗷 🐽		10.
		42
		16 %"
XM8901-09	Canopy for power supply with 9 outputs.	3.8
CE EHI 🗵 🐽		45
		72,5 28 4/1"
XM8901-15	Canopy for power supply with 15 outputs.	3.88
C € EHI <u>X</u> ŵ		45
		72,5
		28 4/7
XM9001-03	Canopy for power supply with 3 outputs.	9.0
CE EHI 🗵 👊		15 4/7*
XM9001-07	Canopy for power supply with 7 outputs.	3.9
CE FAI Z m		
		399.5
XM9001-12	Canopy for power supply with 12 outputs.	3.9
CE IHI X		
		70 V
XM9001-21	Canopy for power supply with 21 outputs.	
CE EHL X (m)		
		10.

### Bella

#### Accessories / power supply and fixing

XM9201-01

C € [HI 🗵 🐵

Recessed canopy for electric cable suspensions. Suitable for 24V fixtures: remote driver 24V needed.



### Bella

### Accessories / diffusion

YPL05207.015

C € EHI 🗵 🐽

Ivory pleated fabric lampshade, simple snap installation.









