
PANZERI

Zero Round

220-240V AC ON-OFF A03317.025.0401

Data sheet


CODEA03317.025.0401SYSTEM POWER CONSUMPTION13WEFFICACY61.231m/WLIGHT SOURCELEDLIGHT SOURCE LIFETIMEL70 (B50) 60.000hCOLOUR TEMPERATURE3000K Ra>90LIGHT DISTRIBUTIONdiffusedPOWER SUPPLY220-240V ACFREQUENCY50/60HzELECTRICAL CONFIGURATIONON-OFFDRIVERintegrated includedNOMINAL LUMINOUS FLUX10241mLUMEN OUTPUT7961mEFFICIENCY77.7%WEIGHT0,62 KgPROTECTION DEGREEIP40COLOUR TOLLERANCESSDCM 3PACKING DIMENSIONS31.0 x 31.0 x 20.0 cm	
EFFICACY61.23 lm/WLIGHT SOURCELEDLIGHT SOURCE LIFETIMEL70 (B50) 60.000hCOLOUR TEMPERATURE3000K Ra>90LIGHT DISTRIBUTIONdiffusedPOWER SUPPLY220-240V ACFREQUENCY50/60HzELECTRICAL CONFIGURATIONON-OFFDRIVERintegrated includedNOMINAL LUMINOUS FLUX1024lmLUMEN OUTPUT796lmEFFICIENCY77.7%WEIGHT0.62 KgPROTECTION DEGREEIP40COLOUR TOLLERANCESSDCM 3	
LIGHT SOURCELEDLIGHT SOURCE LIFETIMEL70 (B50) 60.000hCOLOUR TEMPERATURE3000K Ra>90LIGHT DISTRIBUTIONdiffusedPOWER SUPPLY220-240V ACFREQUENCY50/60HzELECTRICAL CONFIGURATIONON-OFFDRIVERintegrated includedNOMINAL LUMINOUS FLUX1024lmLUMEN OUTPUT796lmEFFICIENCY77.7%WEIGHT0.62 KgPROTECTION DEGREEIP40COLOUR TOLLERANCESSDCM 3	
LIGHT SOURCE LIFETIME L70 (B50) 60.000h COLOUR TEMPERATURE 3000K Ra>90 LIGHT DISTRIBUTION diffused POWER SUPPLY 220-240V AC FREQUENCY 50/60Hz ELECTRICAL CONFIGURATION ON-OFF DRIVER integrated included NOMINAL LUMINOUS FLUX 1024Im LUMEN OUTPUT 796Im EFFICIENCY 77.7% WEIGHT 0,62 Kg PROTECTION DEGREE IP40 COLOUR TOLLERANCES SDCM 3	
COLOUR TEMPERATURE 3000K Ra>90 LIGHT DISTRIBUTION diffused POWER SUPPLY 220-240V AC FREQUENCY 50/60Hz ELECTRICAL CONFIGURATION ON-OFF DRIVER integrated included NOMINAL LUMINOUS FLUX 1024lm LUMEN OUTPUT 796lm EFFICIENCY 77.7% WEIGHT 0.62 Kg PROTECTION DEGREE IP40 COLOUR TOLLERANCES SDCM 3	
LIGHT DISTRIBUTIONdiffusedPOWER SUPPLY220-240V ACFREQUENCY50/60HzELECTRICAL CONFIGURATIONON-OFFDRIVERintegrated includedNOMINAL LUMINOUS FLUX1024lmLUMEN OUTPUT796lmEFFICIENCY77.7%WEIGHT0,62 KgPROTECTION DEGREEIP40COLOUR TOLLERANCESSDCM 3	
POWER SUPPLY 220-240V AC FREQUENCY 50/60Hz ELECTRICAL CONFIGURATION ON-OFF DRIVER integrated included NOMINAL LUMINOUS FLUX 1024Im LUMEN OUTPUT 796Im EFFICIENCY 77.7% WEIGHT 0.62 Kg PROTECTION DEGREE IP40 COLOUR TOLLERANCES SDCM 3	
FREQUENCY 50/60Hz ELECTRICAL CONFIGURATION ON-OFF DRIVER integrated included NOMINAL LUMINOUS FLUX 1024lm LUMEN OUTPUT 796lm EFFICIENCY 77.7% WEIGHT 0,62 Kg PROTECTION DEGREE IP40 COLOUR TOLLERANCES SDCM 3	
ELECTRICAL CONFIGURATION ON-OFF DRIVER integrated included NOMINAL LUMINOUS FLUX 10241m LUMEN OUTPUT 7961m EFFICIENCY 77.7% WEIGHT 0,62 Kg PROTECTION DEGREE IP40 COLOUR TOLLERANCES SDCM 3	
DRIVER integrated included NOMINAL LUMINOUS FLUX 1024Im LUMEN OUTPUT 796Im EFFICIENCY 77.7% WEIGHT 0,62 Kg PROTECTION DEGREE IP40 COLOUR TOLLERANCES SDCM 3	
NOMINAL LUMINOUS FLUX 1024lm LUMEN OUTPUT 796lm EFFICIENCY 77.7% WEIGHT 0,62 Kg PROTECTION DEGREE IP40 COLOUR TOLLERANCES SDCM 3	
LUMEN OUTPUT 796lm EFFICIENCY 77.7% WEIGHT 0,62 Kg PROTECTION DEGREE IP40 COLOUR TOLLERANCES SDCM 3	d
EFFICIENCY 77.7% WEIGHT 0,62 Kg PROTECTION DEGREE IP40 COLOUR TOLLERANCES SDCM 3	
WEIGHT 0,62 Kg PROTECTION DEGREE IP40 COLOUR TOLLERANCES SDCM 3	
PROTECTION DEGREE IP40 COLOUR TOLLERANCES SDCM 3	
COLOUR TOLLERANCES SDCM 3	
PACKING DIMENSIONS 21.0 x 21.0 x 20.0 cm	
PACKING DIMENSIONS 51,0 X 51,0 X 20,0 CIT	m

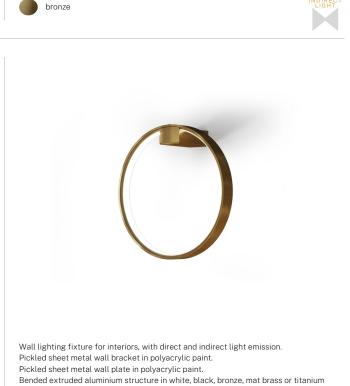


polyacrylic paint. Extruded polycarbonate diffuser with opaline finish.

CE EAE 🕱

Technical drawing





Polar diagram

