


Yin, lampada a parete da interni a biemissione in AirCoral® dalla forma sfaccettata, genera una luminosità che si relaziona con lo spazio e il prodotto stesso. La luce emessa, infatti, crea una contrapposizione di luci e ombre sulla superficie del prodotto, la forma invece rompe la linearità delle pareti, imponendo la sua presenza in un modo originale.

Yin, a bi-emission indoor lamp of AirCoral® installable on walls, has a multifaceted form which creates a light capable of interacting with the space the product is placed in and with the product itself. The emanated beam, in fact, generates a juxtaposition of light and shadow on the surface of the luminaire, while the form breaks the walls linearity, imposing its presence in a very original way.





## TECHNICAL FEATURES

Code 2816.AC Type Wall lamp  $\bowtie$ Material AC: AirCoral® Absorption capacity\* 5.5 m<sup>2</sup> Mounting Wall mounting IP rating IP20 Insulation class

Control gear Dimmable constant current driver

> LED 350 mA **=**

Lamp wattage 2 x 6.5W Luminous efficacy 2 x 810 lm - 3000K Light distribution Wide beam 120°

Fitting

Lamp type

Light colour

White 3000K White 2700K | 4000K (on request) Voltage connection 220-240V · 50/60Hz


CRI >90

Emergency Energy efficiency class  $\mathbb{A}^{+}$ 

Satin glass included.

Trailing-edge and leading-edge dimming (20 - 100%).

 $^{\star}$  The absorption capacity per m $^3$  calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m $^2$ www.buzzi-buzzi.it 319 Yin

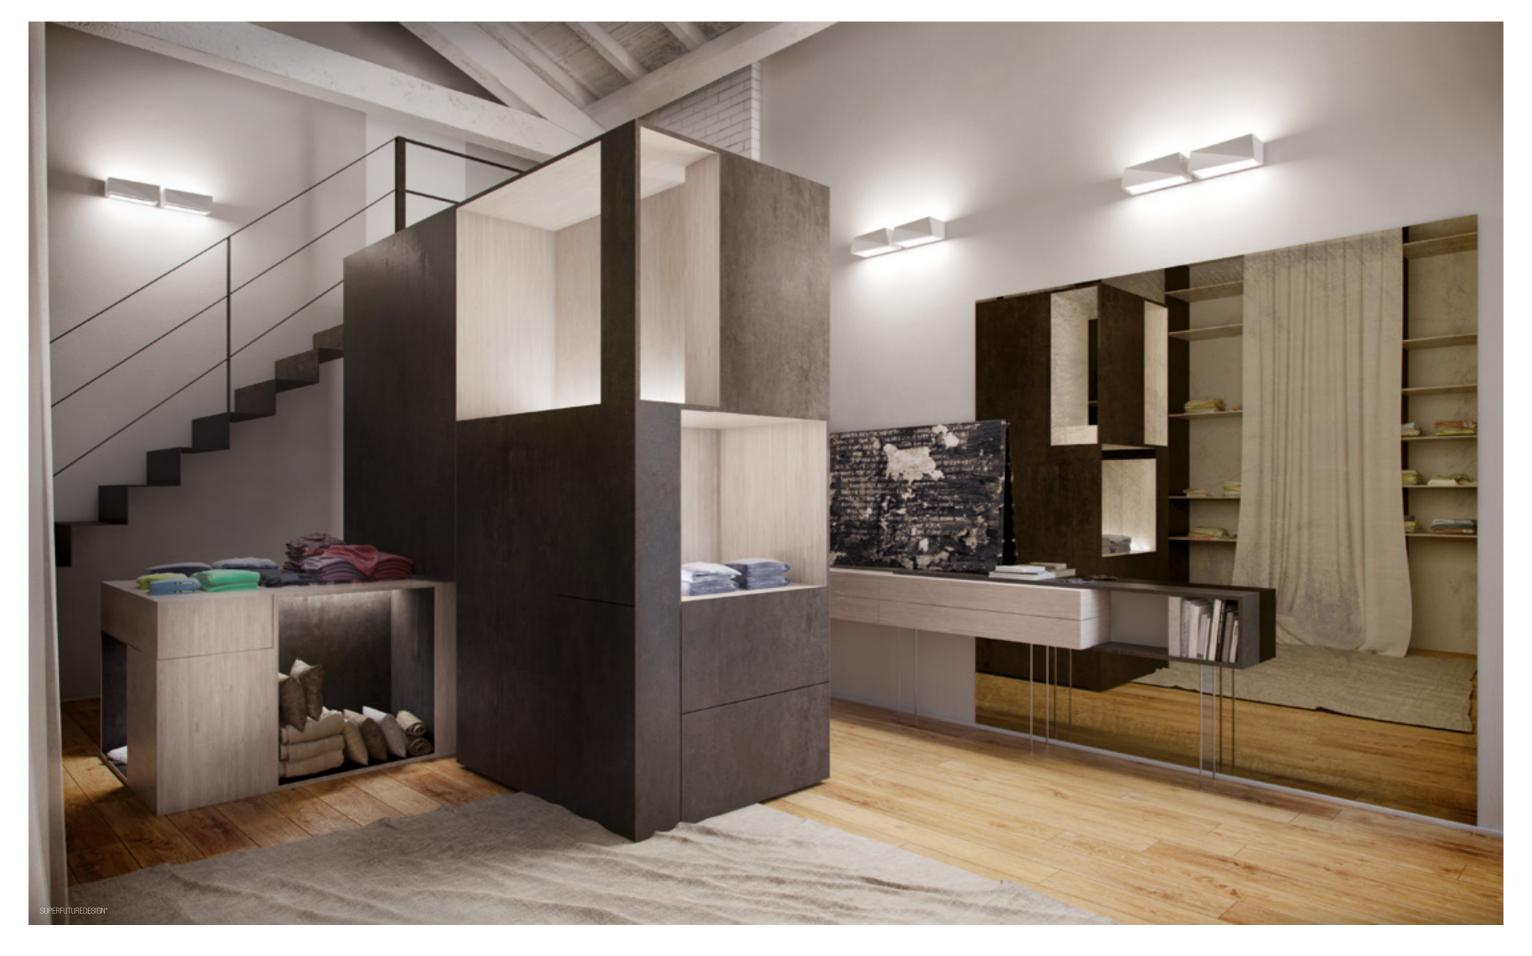

320 | **8**6 www.buzzi-buzzi.it | 321