


# PANZERI

## One

220-240V AC ON-OFF  
L03721.000.0401

 gold leaf

DIRECT  
LIGHT


### Data sheet

CODE	L03721.000.0401
SYSTEM POWER CONSUMPTION	15W
EFFICACY	68.13lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L90 (B10) 50.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	1611lm
LUMEN OUTPUT	1022lm
EFFICIENCY	63.4%
WEIGHT	1,47 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	18,0 x 46,0 x 20,0 cm



Suspension lighting fixture for interiors, with direct light emission.  
Extruded aluminium structure in white, black, bronze or mat brass polyacrylic paint, or with gold leaf coating.  
Turned pickled sheet metal end cap in white, black, bronze, mat brass or gold polyacrylic paint.  
Aluminium dissipation plate.  
Flat frosted glass diffuser.  
Turned pickled sheet metal frame in white, black, bronze or mat brass polyacrylic paint, or with gold leaf coating.  
2m (78,7") long suspension and power cable in transparent PVC.  
Power canopy with galvanized sheet metal ceiling bracket and pickled sheet metal covering in white, black, bronze or mat brass polyacrylic paint, or with gold leaf coating.

### Technical drawing

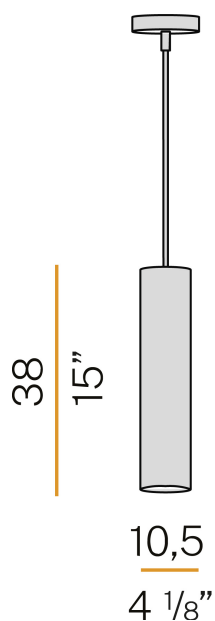

### Polar diagram

