Ely

220-240V AC M10076.000.0000

Data sheet

CODE	M10076.000.0000
SYSTEM POWER CONSUMPTION	max 48W
LIGHT SOURCE	LED retrofit / halogen
LIGHT SOURCE KIT	not included
COMPATIBLE SOURCES	LED retrofit bulb G9 (L max 60mm - Ø max 17,5mm) / max 48W G9
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
WEIGHT	0,50 Kg
PROTECTION DEGREE	IP40
PACKING DIMENSIONS	0,0 × 0,0 × 0,0 cm



mat	bra


mat brass/tobacco diffuser





Multiple suspension lighting fixture for interiors, with direct and indirect light emission. Pickled sheet metal structure in white polyacrylic paint. Diffuser in blown glass with crystal, steel, amber, bronze, tobacco or green rigadin finish.

Turned pickled sheet metal closing disk in mat brass polyacrylic paint. 3m (118,1") long suspension and power cable in transparent PVC. Provided without power canopy.

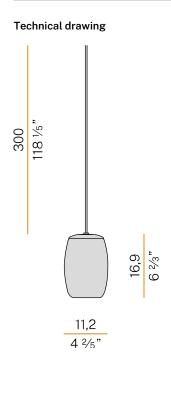

Ely

Accessories / source

XM5/G9LED

CE ERE 🗵

LED lamp G9 4W 220-240V AC 3000K Ra>80 340lm, not dimmable.



Ely

Accessories / power supply

M7901/1	Canopy for power supply.	
CE EAL 🗵		a 10.6 10.6 10.6 10.6 10.6 10.6 10.6 10.6
M7901/2	Canopy for power supply with 2 outputs.	
CE ERL X		0 1 0 0 0 1 1 1 1 1 1 1 1 1 1
M7901/3	Canopy for power supply with 3 outputs.	□ □ 0 1 1 1 −
CE ERE X		a 10,6 b a b b b b b b c b b c b c c b c c c c c c c c c c
M7902/1	Canopy for power supply.	
CE ERE X		a 10,6 10,6
M7902/2	Canopy for power supply with 2 outputs.	
CE EHL X		a b c c c c c c c c
M7902/3	Canopy for power supply with 3 outputs.	
CE HHL 🗵		0 0 0 0 0 0 0 0 0 1 0 0 0 0 0 0 0 0 0 0

Ely

Accessories / power supply and fixing

XM8901-03	Canopy for power supply with 3 outputs.	0, 0 13/8 13/8
CE ERE 🗵		\cdots
		42 16 ⁵ /9"
XM8901-05	Canopy for power supply with 5 outputs.	13%. 13%.
		$\alpha_{1,\gamma}^{*}$
CE EAE 🗵		76 30*
XM8901-06	Canopy for power supply with 6 outputs.	
CE ERE 🗵		25 10 *
		42 16 %g*
XM8901-09	Canopy for power supply with 9 outputs.	
CE III 🗵		46 17 Ar
		72.5 28 4/*
XM8901-15	Canopy for power supply with 15 outputs.	30 10 10 10 10 10 10 10 10 10 10 10 10 10
CE ERE 🗵		46 17 %*
		72.5 28 4/*
XM9001-03	Canopy for power supply with 3 outputs.	
CE III 🗵		· · · · · ·
XM9001-07	Canopy for power supply with 7 outputs.	
CE EAE 🗵		ع: م
		39,5 15 4/2
XM9001-12	Canopy for power supply with 12 outputs.	
CE EAE 🗵		
XM9001-21	Canopy for power supply with 21 outputs.	
CE EAE 🗵		· · · · · · · · · · · · · · · · · · ·
		· · · · ·

Ely

Accessories / power supply and fixing

XM9201-01

Recessed canopy for electric cable suspensions. Suitable for 24V fixtures: remote driver 24V needed.







Ely

Accessories / fixing

M75D	Suspension and adjustment device for electric cable.	4,2 1 ^{2/3} "
CE ERE 🗵		
		1 ¹ / ₇ ,9
M800	Polycarbonate hook for suspension.	3,2
CE ERE 🗵		
		2 (⁴ / ₅ [*]