


- Circular recessed LED downlight
- Aluminium body machined from solid in 6082 alloy with surface protection treatment and subsequent polyester powder paint resistant to corrosion, atmospheric conditions and salt spray
- Brushed stainless steel frame AISI 316L
- Thermal shock resistant tempered, extraclear, anti-glare safety glass with grinded edges
- Springs for ceiling installation
- IP67 external power supply included
- IP68 connector for the connection between projector and power supply included
- Maximum permissible ambient temperature + 35°C



- *Proiettore LED da incasso circolare*
- *Corpo in alluminio tornito dal pieno lega 6082 con trattamento superficiale di protezione e successiva verniciatura in polvere di poliestere resistente agli agenti atmosferici, alla corrosione ed alle nebbie saline*
- *Cornice esterna in acciaio inox AISI 316L spazzolata*
- *Vetro di sicurezza temperato con bordi molati, extrachiaro ed antiriflesso resistente agli shock termici*
- *Molle per installazione a soffitto*
- *Alimentatore esterno IP67 incluso*
- *Connettore IP68 per la connessione fra proiettore ed alimentatore incluso*
- *Temperatura ambiente massima ammissibile +35°C*




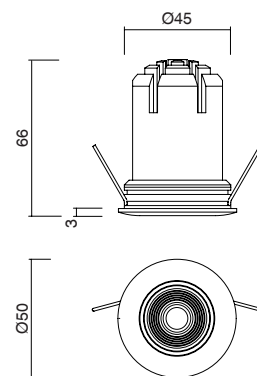


| | | | | |
|-------------------------------------|--|-------------------------------|---|------------------------|
| Lamp / Lampada 1 LED COB CREE | Input / Alimentazione 220/240V 50/60Hz | Power / Potenza 5 / 10W | Color Tolerance/ Tolleranza Cromatica 2-SDCM / 3-SDCM | CRI / CRI 80 MIN |
|-------------------------------------|--|-------------------------------|---|------------------------|



NEXO LUCE (Factory)
Strada Mirabella, 10
46040 Cavriana (MN), ITALY
T +39 0376 771513 F +39 0376 772235
sales@nexoluce.com www.nexoluce.com

Made in Italy

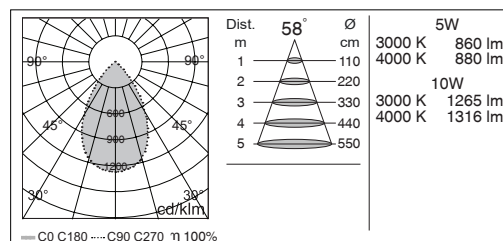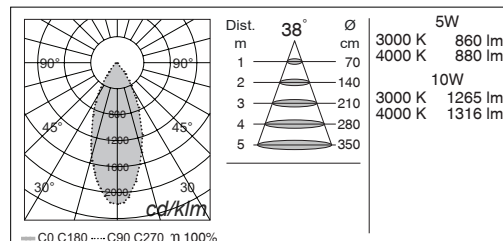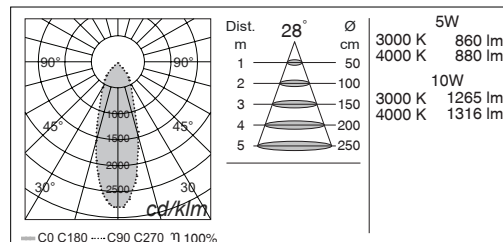

| MAIN CODE CODICE BASE | RELEASE EDIZIONE | LIGHT COLOR COLORE LUCE | WATT WATT | OPTIC OTTICA | CONTROL CONTROLLO | FRAME COLOR COLORE |
|--------------------------|---------------------|---|----------------|-----------------|----------------------|-------------------------------|
| 6848 | .1 | B 3000K | .05 5W | CN 28° | 1 ON/OFF | .G STAIN. STEEL / INOX |
| | | C 4000K | .10 10W | BD 38° | | |
| | | * others on request / altri su richiesta | | .J 58° | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

CODE EXAMPLE : Projector with warm white light color at 3000K, 10W, 28° optic, ON/OFF control, stainless steel color
6848.1B.10CN1.G

ESEMPIO DI CODIFICA : Proiettore con luce calda a 3000K, 10W, ottica 28°, controllo ON/OFF, colore inox
6848.1B.10CN1.G

NEXO LUCE (Factory)
Strada Mirabella, 10
46040 Cavriana (MN), ITALY
T +39 0376 771513 F +39 0376 772235
sales@nexoluce.com www.nexoluce.com

Made in Italy