


807001 - 807004

RING POLE MINI

Floodlight for outdoor installation on a pole diam. 60 mm or 76 mm, with 355° swivel pole attachment and allowing horizontal adjustment of +90° / -40°. Phospho-chromatised and polyester powder coated die-cast copper-free aluminium base and head, tempered safety glass, moulded silicone gaskets and o-rings, with screws in stainless steel. Swivel pole joint with graduated scale and mechanical aiming lock. Built-in LED driver, with 1 COB CREE "CXB 1310" LED. IP66 rating.


807001





807004








Technical features



Technical data

IP Rating	IP66
IK Rating	IK10
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Screws	Stainless steel
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	M16 rubber grommet
Power cable	Not included

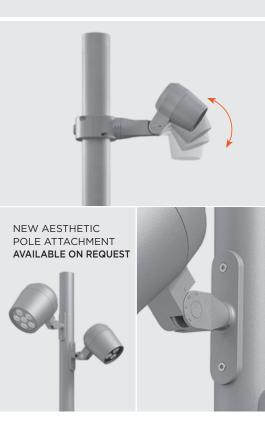

807001	SINGLE RING POLE MINI	SINGLE RING POLE MINI - 10 WATT 220-240V 50-60HZ		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
3000°K warm-v	3000°K warm-white			
cob led	14°	1.100	110	
cob led	35°	1.060	106	
cob led	55°	1.000	100	
4000°K neutral-white				
cob led	14°	1.200	120	
cob led	35°	1.140	114	
cob led	55°	1.083	108	

Colors options

Textured Grey RAL 9006 Anthracite Grey RAL 7016 Matt Black (on request)

Technical	data
recinical	uata

Wattage	10 WATT
Light source	1 COB CREE "CXB 1310" LED
Gross weight	2,00 Kg



807004	DOUBLE RING POLE MIN	DOUBLE RING POLE MINI - 2X10 WATT 220-240V 50-60HZ		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)	
3000°K warm-white				
cob led	14°	2 x 1.100	110	
cob led	35°	2 x 1.060	106	
cob led	55°	2 x 1.000	100	
4000°K neutral-white				
cob led	14°	2 x 1.200	120	
cob led	35°	2 x 1.140	114	
cob led	55°	2 x 1.083	108	

Technical data		
Wattage	2X10 WATT	
Light source	2 COB CREE "CXB 1310" LED	
Gross weight	3,50 Kg	



Colors options

Textured Grey RAL 9006 Anthracite Grey RAL 7016 Matt Black (on request)

POLES & ACCESSORIES

Full technical details of poles and accessories for poles are available at the end of the catalogue

BURIED PO		
code	h. mm.	
809901	3.500	
809902	4.500	
809903	5.500	
809909	TOP CAP DIAM 76mm.	

	POLES WITH BASE-PLATE		
	code	h. mm.	
	809904	3.000	
	809905	4.000	
	809906	5.000	
_	809907	ACC.	
	809909	TOP CAP DIAM 76mm	