

Design  
Mammini+Candido

# MOTUS




## SEMI INCASSO.

Regalare movimento alle forme e ai volumi attraverso l'illuminazione: grazie a Motus, semincasso a scomparsa totale da interni in AirCoral® per installazione in soffitto di cartongesso o laterizio, gli spazi prendono vita in un gioco di luci e ombre. L'apparecchio diventa parte integrante del controsoffitto, inserendosi nello spazio con delicata eleganza.

## SEMI RECESSED.

*Giving movement to shapes and volumes through lighting: thanks to Motus, an indoor totally disappearing semi recessed luminaire made of AirCoral®, installable on plasterboard or brick ceilings, architectures come alive in a play of lights and shadows. This product becomes an integral part of the false ceiling, inserting itself in the space with delicate elegance.*

## Recessed

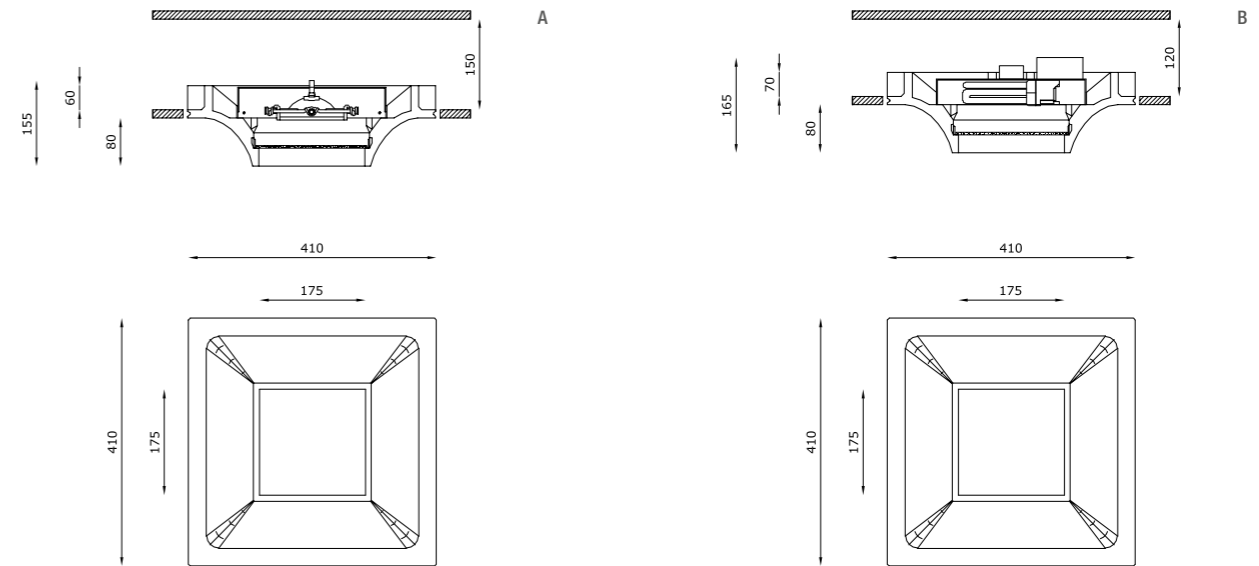

### TECHNICAL FEATURES

Code	6361.AC (fig.A)	6366.AC (fig.B)	6368.AC (fig.B)	6461.AC (fig.B)	6463.AC (fig.B)
Type	Tilttable downlight ± 30° 	Downlight 90° 	Downlight 90° 	Downlight 90° 	Downlight 90° 
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	20.35 m²	20.35 m²	20.35 m²	20.35 m²	20.35 m²
Weight	6.2 Kg	6.3 Kg	6.4 Kg	8.5 Kg	8.5 Kg
Mounting	Ceiling half recessed	Ceiling half recessed	Ceiling half recessed	Ceiling half recessed	Ceiling half recessed
IP rating	IP40	IP40	IP40	IP40	IP40
Insulation class	III	I	I	I	I
Control gear	Dimmable electronic transformer	Electronic ballast	Electronic ballast	Constant current electronic driver	Dimmable constant current driver
Cut out for plasterboard	420 x 420 mm	420 x 420 mm	420 x 420 mm	420 x 420 mm	420 x 420 mm
Lamp type	QR 111 	TC-TEL 	TC-TEL 	LED 1050 mA 	LED 350 mA 
Lamp wattage	1 x 100W max	2 x 26/32W	2 x 26W	1 x 40W	2 x 6.5W
Luminous efficacy	-	-	-	4680 lm - 3000K	2 x 810 lm - 3000K
Light distribution	-	-	-	Wide beam 40°	Wide beam 120°
Fitting	G53	Gx24q-3	Gx24q-3	-	-
Light colour	-	-	-	White 3000K White 2700K   4000K (on request)	White 3000K White 2700K   4000K (on request)
Light hole	175 x 175 mm	175 x 175 mm	175 x 175 mm	175 x 175 mm	175 x 175 mm
Voltage connection	220-240V / 12V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	-	-	-	>90	>90
Emergency	-	-	1 hour	-	-
Energy efficiency class	A	A	A	A+	A+
Note	Extra white satin glass. Recessed glass 30 mm.	Extra white satin glass. Recessed glass 30 mm.	Extra white satin glass. Recessed glass 30 mm.	Extra white satin glass. Recessed glass 30 mm.	Extra white satin glass. Recessed glass 30 mm.  Trailing-edge and leading-edge dimming (20 - 100%).

### OPTIONAL ACCESSORIES

product code	optional code	description	info
6361.AC	00010KIT	Kit LED dimmable	Bulb 10W · 12V

\* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²