


SLOT 2

IP rated downlights

design Roberto Mantovani



IP67-rated, recessed fixtures of the highest build quality, extremely compact dimensions and high output. Fully anodized aluminium body, versions with front in AISI 316L stainless steel and in powder-coated anodized aluminium. Extra-clear tempered glass, ATEX cable gland, neoprene cable. Can be installed with anti-glare filter for maximum viewing comfort.

Incassi IP67 di altissima qualità costruttiva, con dimensioni estremamente contenute ed elevati flussi luminosi. Corpo in alluminio anodizzato a spessore, versioni con frontale in acciaio INOX AISI316L, in alluminio anodizzato e verniciato a polveri. Vetro extrachiario temprato, pressacavo ATEX, cavo in neoprene. Equipaggiabili con filtro antiabbagliamento per il massimo comfort visivo.

Encastrables IP67 de très haute qualité constructive, avec des dimensions extrêmement contenues et flux lumineux élevés. Corps en aluminium anodisé à épaisseur, versions avec frontal en acier INOX AISI316L, en aluminium anodisé et peint en poudre. Verre extra-clair trempé, presse-étoupe ATEX, câble en néoprène. Peuvent être équipés avec filtre anti-éblouissement pour le meilleur confort visuel.

Einbau mit Schutzklasse IP67 mit hoher konstruktiver Qualität von extrem kleiner Größe und hohen Lichtströmen. Gehäuse aus eloxiertem Aluminium mit Stärke, Versionen mit Vorderteil aus Edelstahl AISI 316L, aus eloxiertem und pulverbeschichtetem Aluminium. Extra gehärtetes Glas, ATEX Kabeldurchführung, Neopren-Kabel. Kann mit Blendschutzfilter ausgestattet werden für maximalen visuellen Komfort.

IP67 made in Italy



Supply current


350-500 mA (V, 2,9V)

Power


1-2 W

Series wiring

Dimensions



Photometric diagrams

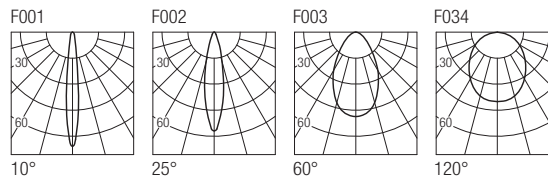

CCT/CRI/Flux

	350mA	500mA
2700K	89lm	128lm
3000K	93lm	133lm
4200K	103lm	154lm
6000K	114lm	165lm


Code construction

SL2 X X X

B	G	N	K	Z
White	Grey	Black	COR-TEN	INOX AISI 316L
0	1	2	3	6
2700K	3000K	4200K	6000K	Blue
0	1	2	9	
10°	25°	60°	120°	

Optionals

CSXJ01
Recessing box



LSL201
Low luminance louver



Note: the filter must be ordered together with the lighting fixture

Drivers

350 mA		500 mA	
on/off	dimmable	on/off	dimmable
AL1034 (1..11) 30mm IP20	AL4000 (1..12) 72mm IP20 PUSH 1..10V	AL1074 (1..7) 30mm IP20	AL4010 (1..12) 72mm IP20 PUSH 1..10V
AL1035 (1..11) 40mm IP20	AL4051 (1..12) 72mm IP20 DALI	AL1077 (1..6) 40mm IP20	AL4151 (1..12) 72mm IP20 DALI
AL1037 (1..16) 55mm IP20 S.P.	AL4053 (1..12) 56mm IP20 PUSH IGBT-TRIAC	AL1084 (1..11) 55mm IP20 S.P.	AL4153 (1..12) 56mm IP20 PUSH IGBT-TRIAC
AL9011 (1..12) 44mm IP67	AL8035 (4..16) IP67 DALI	AL9051 (1..10) 44mm IP20	AL8050 (4..16) IP67 DALI